

FnIO S-Series: NA-9188

Ethernet/IP Adapter

DRAFT

CREVIS

Table of Contents


1. FNBUS OVERVIEW.....	6
1.1. FNBUS SYSTEM.....	6
1.2. FNBUS PIN DESCRIPTION.....	7
2. ETHERNET/IP ADAPTER MODULE.....	8
2.1. SHAPE.....	8
2.2. ETHERNET/IP ADAPTER SPECIFICATION.....	9
2.3. LED INDICATOR.....	10
2.3.1. Module Status LED (MOD).....	10
2.3.2. Network Status LED (NET).....	10
2.3.3. Link/Active Status LED (LINK).....	10
2.3.4. Expansion I/O Module Status LED (I/O).....	10
2.3.5. Field Power Status LED.....	11
2.3.6. Adapter Electrical Interface.....	11
2.4. ETHERNET/IP IP-ADDRESS SETUP.....	12
2.4.1. IP-Address Setup using BOOTP.....	12
2.5. I/O PROCESS IMAGE MAP.....	13
2.5.1. Example of Input Process Image Map.....	14
2.5.2. Example of Output Process Image Map.....	18
3. OBJECT MODELS.....	20
3.1. SUPPORTED OBJECTS.....	20
3.2. IDENTITY OBJECT.....	21
3.2.1. Common Services	21
3.2.2. Class Attributes.....	21
3.2.3. Instance Attributes.....	21
3.3. MESSAGE ROUTER OBJECT.....	23
3.3.1. Common Services	23
3.3.2. Class Attributes.....	23
3.3.3. Instance Attributes.....	23
3.4. ASSEMBLY OBJECT.....	24
3.4.1. Common Services	24
3.4.2. Class Attributes.....	24
3.4.3. Instance Attributes.....	24
3.5. CONNECTION MANAGER OBJECT.....	25
3.5.1. Class Attributes, Instance Attribute.....	25
3.6. PORT OBJECT.....	25
3.6.1. Common Services	25
3.6.2. Class Attributes.....	25
3.6.3. Instance Attributes.....	25
3.7. TCP/IP OBJECT.....	26
3.7.1. Common Services	26
3.7.2. Class Attributes.....	26
3.7.3. Instance Attributes.....	26
3.8. ETHERNET LINK OBJECT.....	27
3.8.1. Common Services	27
3.8.2. Class Attributes.....	27
3.8.3. Instance Attributes.....	27
3.9. FNBUS MANAGER OBJECT.....	28

3.9.1. Common Services	28
3.9.2. Class Attributes.....	28
3.9.3. Instance Attributes.....	28
Table 3.9.1. Selection of Input (Produced) Process Image Mode.....	29
Table 3.9.2. Selection of Output (Consumed) Process Image Mode.....	29
Table 3.9.3. Slot Active Flag.....	29
Table 3.9.4. Slot Live List.....	29
Table 3.9.5. Slot Alarm List.....	30
Table 3.9.6. External IDs (=Expansion Module ID).....	30
3.10. EXPANSION SLOT OBJECT.....	31
3.10.1. Common Services	31
3.10.2. Class Attributes.....	31
3.10.3. Instance Attributes.....	31
Table 3.10.1. I/O Data Code Format.....	32
Table 3.10.2. Product Code Format.....	32
3.11. ETHERNET/IP REFERENCE.....	35
APPENDIX A.....	36
A.1. PRODUCT LIST.....	36
A.2. CONFIGURATION PARAMETER.....	38
A.2.1. ST-1214 (4-sinking input, 24Vdc).....	38
A.2.2. ST-1224 (4-sourcing input, 24Vdc).....	38
A.2.3. ST-1218 (8-sinking input, 24Vdc).....	38
A.2.4. ST-1228 (8-sourcing input, 24Vdc).....	38
A.2.5. ST-121F (16-sinking input, 24Vdc).....	38
A.2.6. ST-122F (16-sourcing input, 24Vdc).....	38
A.2.7. ST-1314 (4-sinking input, 48Vdc).....	38
A.2.8. ST-1324 (4-sourcing input, 48Vdc).....	38
A.2.9. ST-1804 (4-ac input, 110Vac).....	38
A.2.10. ST-1904 (4-ac input, 220Vac).....	38
A.2.11. ST-2314 (4-sinking output, 24Vdc 0.5A).....	39
A.2.12. ST-2324 (4-sourcing output, 24Vdc 0.5A).....	39
A.2.13. ST-2318 (8-sinking output, 24Vdc 0.5A).....	39
A.2.14. ST-2328 (8-sourcing output, 24Vdc 0.5A).....	41
A.2.15. ST-221F (16-sinking output, 24Vdc 0.3A).....	41
A.2.16. ST-222F (16-sourcing output, 24Vdc 0.3A).....	41
A.2.17. ST-2414 (4-sinking output, Diag, 24Vdc 0.5A).....	42
A.2.18. ST-2424 (4-sourcing output, Diag, 24Vdc 0.5A).....	42
A.2.19. ST-2514 (4-sinking output, Diag, 24Vdc 2A).....	42
A.2.20. ST-2524 (4-sourcing output, Diag, 24Vdc 2A).....	43
A.2.21. ST-2742 (2-relay output, 230Vac 2A).....	43
A.2.22. ST-2852 (2-triac output, 120Vac 0.5A).....	43
A.2.23. ST-3114 (4-current analog input, 0~20mA, 12bit).....	44
A.2.24. ST-3134 (4-current analog input, 0~20mA, 14bit).....	44
A.2.25. ST-3214 (4-current analog input, 4~20mA, 12bit).....	44
A.2.26. ST-3234 (4-current analog input, 4~20mA, 14bit).....	44
A.2.27. ST-3424 (4-voltage analog input, 0~10V, 12bit).....	44
A.2.28. ST-3444 (4-voltage analog input, 0~10V, 14bit).....	44
A.2.29. ST-3524 (4-voltage analog input, -10~10V, 12bit).....	44
A.2.30. ST-3544 (4-voltage analog input, -10~10V, 14bit).....	44
A.2.31. ST-3624 (4-voltage analog input, 0~5V, 12bit).....	44
A.2.32. ST-3644 (4-voltage analog input, 0~5V, 14bit).....	44
A.2.33. ST-3702 (2- RTD/Resistance input).....	46

A.2.34. ST-3802 (2- Thermocouple/mV input).....	47
A.2.35. ST-4112 (2-current analog output, 0~20mA, 12bit).....	48
A.2.36. ST-4212 (2-current analog output, 4~20mA, 12bit).....	48
A.2.37. ST-4422 (2-voltage analog output, 0~10Vdc, 12bit).....	48
A.2.38. ST-4522 (2-voltage analog output, -10~10Vdc, 12bit).....	48
A.2.39. ST-4622 (2-voltage analog output, 0~5Vdc, 12bit).....	48
A.2.40. ST-5101 (1 Channel High Speed Counter 5Vdc).....	48
A.2.41. ST-5111 (1 Channel High Speed Counter 24Vdc).....	48
A.3. MEMORY REGISTER.....	49
A.3.1. ST-1214 (4-sinking input, 24Vdc).....	49
A.3.2. ST-1224 (4-sourcing input, 24Vdc).....	49
A.3.3. ST-1218 (8-sinking input, 24Vdc).....	49
A.3.4. ST-1228 (8-sourcing input, 24Vdc).....	49
A.3.5. ST-121F (16-sinking input, 24Vdc).....	49
A.3.6. ST-122F (16-sourcing input, 24Vdc).....	49
A.3.7. ST-1314 (4-sinking input, 48Vdc).....	49
A.3.8. ST-1324 (4-sourcing input, 48Vdc).....	49
A.3.9. ST-1804 (4-ac input, 110Vac).....	49
A.3.10. ST-1904 (4-ac input, 220Vac).....	49
A.3.11. ST-2314 (4-sinking output, 24Vdc 0.5A).....	49
A.3.12. ST-2324 (4-sourcing output, 24Vdc 0.5A).....	50
A.3.13. ST-2318 (8-sinking output, 24Vdc 0.5A).....	50
A.3.14. ST-2328 (8-sourcing output, 24Vdc 0.5A).....	50
A.3.15. ST-221F (16-sinking output, 24Vdc 0.1A).....	50
A.3.16. ST-222F (16-sourcing output, 24Vdc 0.1A).....	50
A.3.17. ST-2414 (4-sinking output, Diag, 24Vdc 0.5A).....	50
A.3.18. ST-2424 (4-sourcing output, Diag, 24Vdc 0.5A).....	50
A.3.19. ST-2514 (4-sinking output, Diag, 24Vdc 2A).....	50
A.3.20. ST-2524 (4-sourcing output, Diag, 24Vdc 2A).....	50
A.3.21. ST-2742 (2-relay output, 230Vac 2A).....	50
A.3.22. ST-2852 (2-triac output, 120Vac 0.5A).....	50
A.3.23. ST-3114 (4-current analog input, 0~20mA, 12bit).....	51
A.3.24. ST-3134 (4-current analog input, 0~20mA, 14bit).....	51
A.3.25. ST-3214 (4-current analog input, 4~20mA, 12bit).....	52
A.3.26. ST-3234 (4-current analog input, 4~20mA, 14bit).....	52
A.3.27. ST-3424 (4-voltage analog input, 0~10V, 12bit).....	53
A.3.28. ST-3444 (4-voltage analog input, 0~10V, 14bit).....	53
A.3.29. ST-3524 (4-voltage analog input, -10~10V, 12bit).....	54
A.3.30. ST-3544 (4-voltage analog input, -10~10V, 14bit).....	54
A.3.31. ST-3624 (4-voltage analog input, 0~5V, 12bit).....	55
A.3.32. ST-3644 (4-voltage analog input, 0~5V, 14bit).....	55
A.3.33. ST-3702 (2- RTD/Resistance input).....	56
A.3.34. ST-3802 (2- Thermocouple/mV input).....	56
A.3.35. ST-4112 (2-current analog output, 0~20mA, 12bit).....	58
A.3.36. ST-4212 (2-current analog output, 4~20mA, 12bit).....	58
A.3.37. ST-4422 (2-voltage analog output, 0~10Vdc, 12bit).....	59
A.3.38. ST-4522 (2-voltage analog output, -10~10Vdc, 12bit).....	59
A.3.39. ST-4622 (2-voltage analog output, 0~5Vdc, 12bit).....	60
A.3.40. ST-5101 (1 Channel High Speed Counter 5Vdc).....	60
A.3.41. ST-5111 (1 Channel High Speed Counter 24Vdc).....	60

1. FnBUS OVERVIEW

1.1. FnBus System

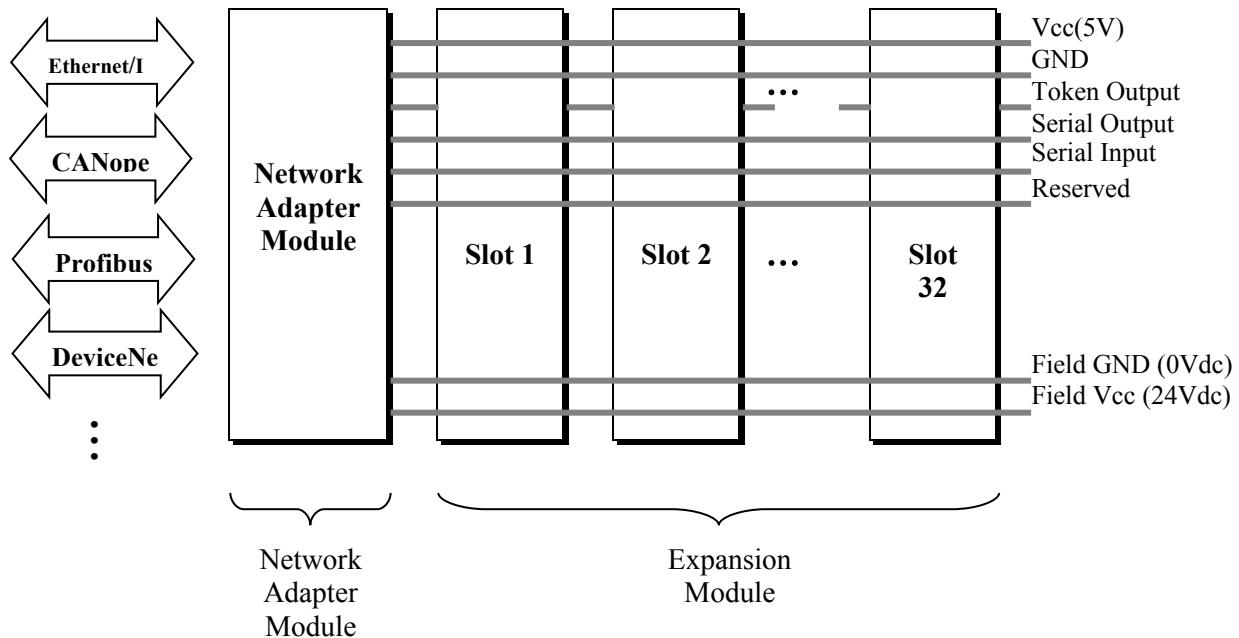

Network Adapter Module

The Network Adapter Module forms the link between the fieldbus and the field devices with the Expansion Modules. The connection to different fieldbus systems can be established by each of the corresponding Network Adapter Module, e.g. for SynqNet, PROFIBUS, CANopen, DeviceNet, Ethernet/IP, CC-Link, MODBUS/Serial, MODBUS/TCP etc.

Expansion Module

The Expansion Modules are supported a variety of input and output field devices. There are digital and analog input/output modules and special function modules.

Two types of FnBus Message

- Service Messaging
- I/O Messaging


1.2. FnBus Pin Description

No.	Name	Description
1	Vcc	System supply voltage (5V dc).
2	GND	System Ground.
3	Token Output	Token output port of Processor module.
4	Serial Output	Transmitter output port of Processor module.
5	Serial Input	Receiver input port of Processor module.
6	Reserved	Reserved for bypass Token.
7	Field GND	Field Ground.
8	Field Vcc	Field supply voltage (24Vdc).

2. ETHERNET/IP ADAPTER MODULE

2.1. Shape

NA-9188 (Ethernet/IP)

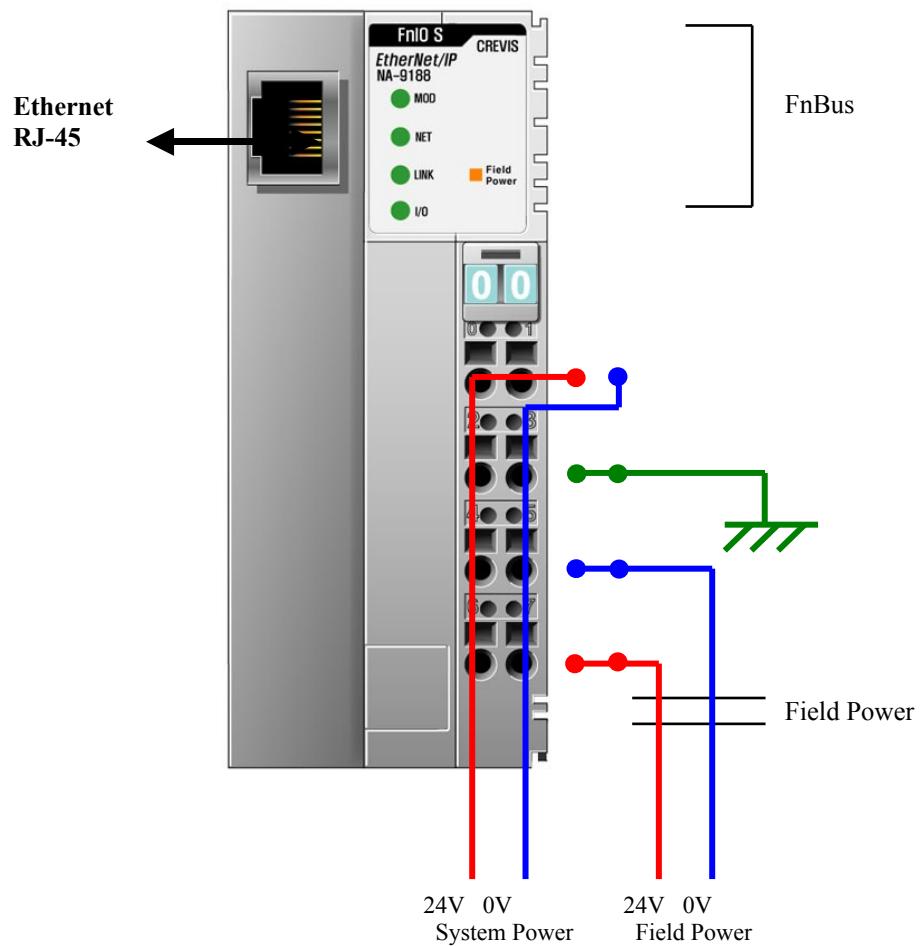

2.2. Ethernet/IP Adapter Specification

■ Specification

Interface Specification, NA-9188 (Ethernet/IP Adapter)

Adapter Type	Level 2 I/O Server (Explicit, I/O Message)
Max. Expansion Module	32 slots
Max. Input Size	252 bytes
Max. Output Size	252 bytes
Max. Length Bus Line	Up to 100m from Ethernet Hub/Switch with twisted CAT 3 UTP/STP
Max. Nodes	Limited by Ethernet Specification.
Max. Connection	16 IO message connections 64 CIP connections 64 Explicit message connections
Data transfer rate	10/100Mbps, Auto-negotiation, Full duplex
Protocol	Ethernet/IP, BOOTP
Interface Connector	RJ-45 socket
IP-Address Setup	Via BOOTP
Indicator	5 LEDs 1 Green/Red, Module Status (MOD) 1 Green, Network Status (NET) 1 Green, Link/Active Status (LINK) 1 Green/Red Expansion I/O Module Status (I/O) 1 Green, Field Power Status
Module Location	Starter module – left side of FnIO system
Field Power Detection	About 11Vdc

General Specification

System Power	Supply voltage : 24Vdc nominal Supply voltage range : 11~28.8Vdc Protection : Output current limit(Min. 1.5A) Reverse polarity protection
Power Dissipation	60mA typical @24Vdc
Current for I/O Module	1.5A @5Vdc
Isolation	System power to internal logic : Non-isolation System power to I/O driver : Isolation
Field Power	Supply voltage : 24Vdc nominal Supply voltage range : 11~28.8Vdc
Max. Current Field Power Contact	DC 10A Max.
Weight	150g
Module Size	45mm x 99mm x 70mm
Environment Condition	Refer to Environment Specification

2.3. LED Indicator

2.3.1. Module Status LED (MOD)

State	LED is:	To indicate:
No Power	Off	No power is supplied to the unit.
Device Operational	Green	The unit is operating in normal condition.
Device in Standby	Flashing Green	The device needs commissioning due to configuration missing, incomplete or incorrect..
Minor Fault	Flashing Red	Recoverable Fault - EEPROM sum check error.
Unrecoverable Fault	Red	The device has an unrecoverable fault. - Memory error or CPU watchdog error.

2.3.2. Network Status LED (NET)

State	LED is :	To indicate :
Not Powered	Off	Module is not powered.
No IP Address		Does not have an IP address.
No Connections	Flashing Green	Module has obtained an IP address, but has no established connections.
CIP Connections	Green	Module has an IP address and at least one established connections.
Connection Time-out	Flashing Red	One or more of the connections in which the module is the target has time out.
Duplicate IP Address	Red	Module has detected that its IP address is already in use. Configure the module with a unique IP address.

2.3.3. Link/Active Status LED (LINK)

State	LED is :	To indicate :
Not Powered Physical network not ready	Off	May not be powered
Link Operational	Green	Physical Network communication ready
Act Operational	Flashing Green	Some data communication on the base Ethernet 802.3

2.3.4. Expansion I/O Module Status LED (I/O)

State	LED is :	To indicate :
Not Powered No Expansion Module	Off	Device has no expansion module or may not be powered
FnBus On-line, Do not Exchanging I/O	Flashing Green	FnBus is normal but does not exchanging I/O data (Passed the expansion module configuration).
FnBus Connection, Run Exchanging IO	Green	Exchanging I/O data
FnBus connection fault during exchanging IO	Flashing Red	One or more expansion module occurred in fault state. - Changed expansion module configuration. - FnBus communication failure.

Expansion Configuration Failed	Red	<p>Failed to initialize expansion module</p> <ul style="list-style-type: none"> - Detected invalid expansion module ID. - Overflowed Input/Output Size - Too many expansion module - Initial protocol failure - Mismatch vendor code between adapter and expansion module.
--------------------------------	-----	---


2.3.5. Field Power Status LED

State	LED is :	To indicate :
Not Supplied Field Power	Off	Not supplied 24V dc field power
Supplied Field Power	Green	Supplied 24V dc field power

2.3.6. Adapter Electrical Interface

To connect the PC directly to network adapter without Hub(Switch), the Ethernet cable connection must be crossed.

Shielded RJ-45 Socket

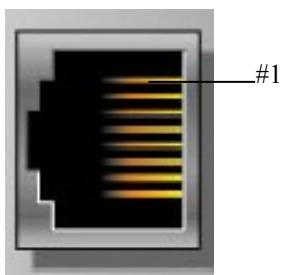

RJ-45	Signal Name	Description
1	TD+	Transmit +
2	TD-	Transmit -
3	RD+	Receive +
4	----	
5	----	
6	RD-	Receive -
7	----	
8	----	
Case	Shield	


2.4. Ethernet/IP IP-Address Setup

2.4.1. IP-Address Setup using BOOTP

If the adapter BOOTP enabled, the adapter sends BOOTP request message every 5sec.


The following is an example of adapter IP-Address setup that can be used with a third party BOOTP server.

- Rockwell Automation's BOOTP server

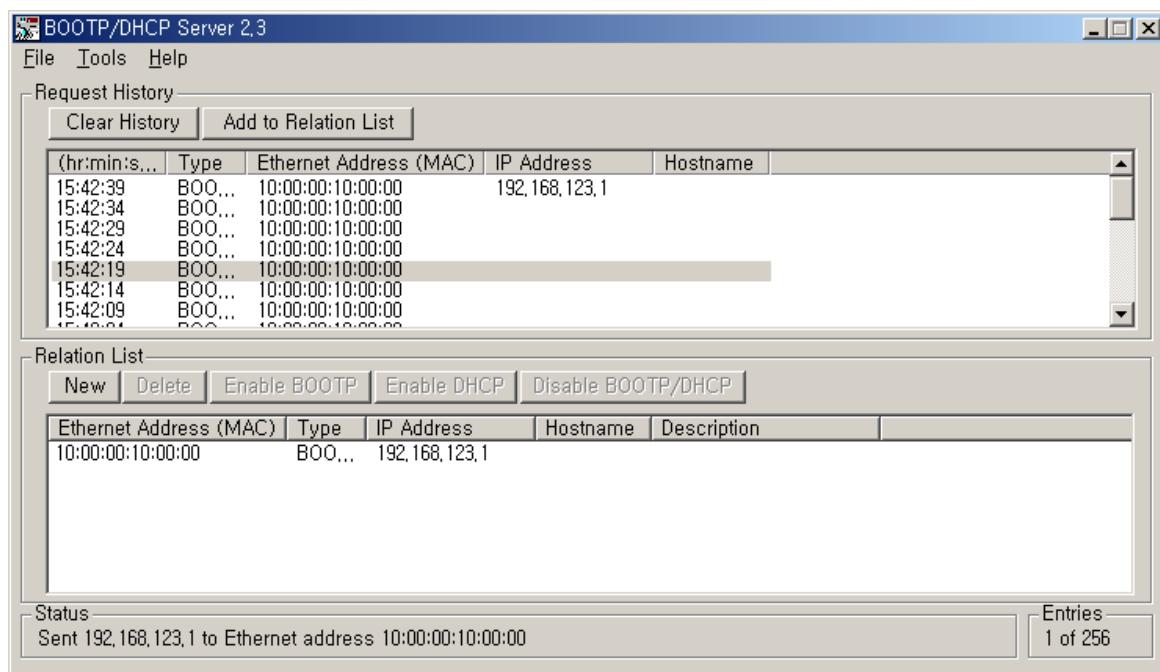

2.5. I/O Process Image Map


An expansion module may have 3 types of data as I/O data, configuration parameter and memory register. The data exchange between network adapter and expansion modules is done via an I/O process image data by FnBus protocol. The following figure shows the data flow of process image between network adapter and expansion modules.

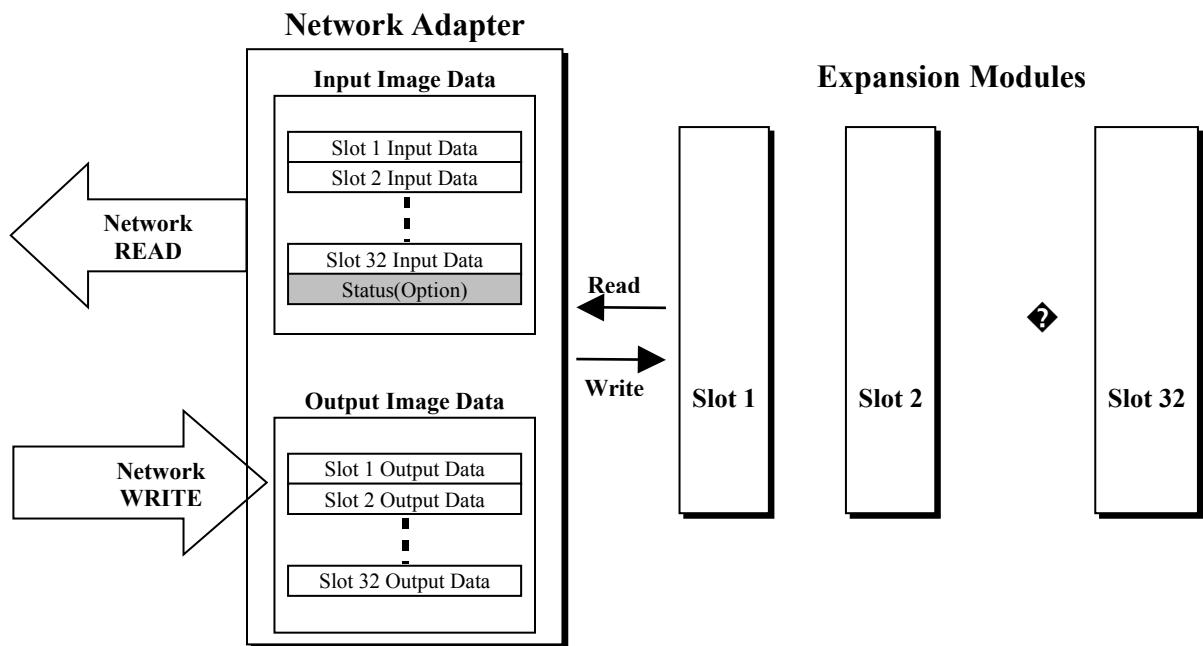

2.5.1. Example of Input Process Image Map

Input image data depends on slot position and expansion slot data type. Input process image data is only ordered by expansion slot position when input image mode is uncompressed (mode 0, 2). But, when input image mode is compressed (mode 1, 3), input process image data is ordered by expansion slot position and slot data type.
Input process image mode can be set by FnBus Manager Object attribute#5. Refer to 3.9.

■ For example slot configuration

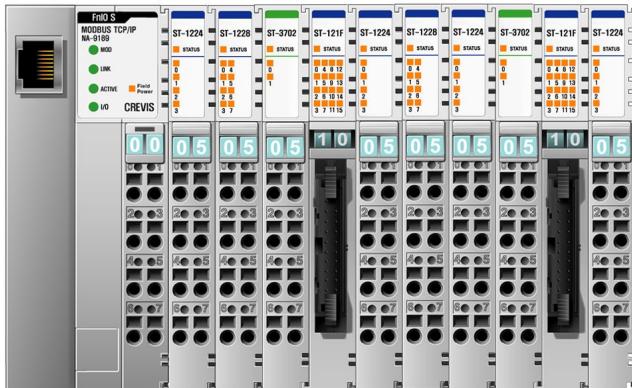

Slot Address	Module Description
#0	Ethernet/IP Adapter
#1	4-discrete input
#2	8-discrete input
#3	2-analog input
#4	16-discrete input
#5	4-discrete input
#6	8-discrete input
#7	4-discrete input
#8	2-analog input
#9	16-discrete input
#10	4-discrete input

Status
(2byte)

■ Input Process Image Mode#0 (Status(2byte) + Uncompressed Input Processing Data)

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	FieldPower	Fn-Bus Status						
1	Always 0, TBD							
2	Empty, Always 0	Discrete Input 4 pts (Slot#1)						
3		Discrete Input 8 pts (Slot#2)						
4		Analog Input Ch0 low byte (Slot#3)						
5		Analog Input Ch0 high byte (Slot#3)						
6		Analog Input Ch1 low byte (Slot#3)						
7		Analog Input Ch1 high byte (Slot#3)						
8		Discrete Input low 8 pts (Slot#4)						
9		Discrete Input high 8 pts (Slot#4)						
10	Empty, Always 0	Discrete Input 4 pts (Slot#5)						
11		Discrete Input 8 pts (Slot#6)						
12	Empty, Always 0	Discrete Input 4 pts (Slot#7)						
13		Analog Input Ch0 low byte (Slot#8)						
14		Analog Input Ch0 high byte (Slot#8)						
15		Analog Input Ch1 low byte (Slot#8)						
16		Analog Input Ch1 high byte (Slot#8)						
17		Discrete Input low 8 pts (Slot#9)						
18		Discrete Input high 8 pts (Slot#9)						
19	Empty, Always 0	Discrete Input 4 pts (Slot#10)						

- Field Power:
0: 24Vdc Field Power On, 1: 24Vdc Field Power Off

- Fn-Bus Status:
0: Normal Operation

1: Fn-Bus Standby

2: Fn-Bus Communication Fault
4: No Expansion Slot

3: Slot Configuration Failed

Status
(2byte)**■ Input Process Image Mode#1 (Status(2byte) Compressed Input Processing Data)**

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	FieldPower							Fn-Bus Status
1	Always 0, TBD							
2					Analog Input Ch0 low byte (Slot#3)			
3					Analog Input Ch0 high byte (Slot#3)			
4					Analog Input Ch1 low byte (Slot#3)			
5					Analog Input Ch1 high byte (Slot#3)			
6					Analog Input Ch0 low byte (Slot#8)			
7					Analog Input Ch0 high byte (Slot#8)			
8					Analog Input Ch1 low byte (Slot#8)			
9					Analog Input Ch1 high byte (Slot#8)			
10					Discrete Input 8 pts (Slot#2)			
11					Discrete Input low 8 pts (Slot#4)			
12					Discrete Input high 8 pts (Slot#4)			
13					Discrete Input 8 pts (Slot#6)			
14					Discrete Input low 8 pts (Slot#9)			
15					Discrete Input high 8 pts (Slot#9)			
16					Discrete Input 4 pts (Slot#5)			Discrete Input 4 pts (Slot#1)
17					Discrete Input 4 pts (Slot#10)			Discrete Input 4 pts (Slot#7)

● Input Assembly Priority:

- 1) Analog Input Data (Word type)
- 2) 8 or 16 points Discrete Input Data (Byte type)
- 3) 4 points Input Data (Bit type)
- 4) 2 points Input Data (Bit type)

■ Input Process Image Mode#2 (Uncompressed Input Processing Data without Status), default input image

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	Empty, Always 0							Discrete Input 4 pts (Slot#1)
1						Discrete Input 8 pts (Slot#2)		
2					Analog Input Ch0 low byte (Slot#3)			
3					Analog Input Ch0 high byte (Slot#3)			
4					Analog Input Ch1 low byte (Slot#3)			
5					Analog Input Ch1 high byte (Slot#3)			
6					Discrete Input low 8 pts (Slot#4)			
7					Discrete Input high 8 pts (Slot#4)			
8	Empty, Always 0							Discrete Input 4 pts (Slot#5)
9						Discrete Input 8 pts (Slot#6)		
10	Empty, Always 0							Discrete Input 4 pts (Slot#7)
11					Analog Input Ch0 low byte (Slot#8)			
12					Analog Input Ch0 high byte (Slot#8)			
13					Analog Input Ch1 low byte (Slot#8)			
14					Analog Input Ch1 high byte (Slot#8)			
15					Discrete Input low 8 pts (Slot#9)			
16					Discrete Input high 8 pts (Slot#9)			
17	Empty, Always 0							Discrete Input 4 pts (Slot#10)

■ Input Process Image Mode#3 (Compressed Input Processing Data without Status)


Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0					Analog Input Ch0 low byte (Slot#3)			
1					Analog Input Ch0 high byte (Slot#3)			
2					Analog Input Ch1 low byte (Slot#3)			
3					Analog Input Ch1 high byte (Slot#3)			
4					Analog Input Ch0 low byte (Slot#8)			
5					Analog Input Ch0 high byte (Slot#8)			
6					Analog Input Ch1 low byte (Slot#8)			
7					Analog Input Ch1 high byte (Slot#8)			
8					Discrete Input 8 pts (Slot#2)			
9					Discrete Input low 8 pts (Slot#4)			
10					Discrete Input high 8 pts (Slot#4)			
11					Discrete Input 8 pts (Slot#6)			
12					Discrete Input low 8 pts (Slot#9)			
13					Discrete Input high 8 pts (Slot#9)			
14				Discrete Input 4 pts (Slot#5)		Discrete Input 4 pts (Slot#1)		
15				Discrete Input 4 pts (Slot#10)		Discrete Input 4 pts (Slot#7)		

- Input Assembly Priority:
 - 1) Analog Input Data (Word type)
 - 2) 8 or 16 points Discrete Input Data (Byte type)
 - 3) 4 points Input Data (Bit type)
 - 4) 2 points Input Data (Bit type)

2.5.2. Example of Output Process Image Map

Output image data depends on slot position and expansion slot data type. Output process image data is only ordered by expansion slot position when output image mode is uncompressed (mode 0). But, when output image mode is compressed (mode 1), output process image data is ordered by expansion slot position and slot data type.
Output process image mode can be set by FnBus Manager Object attribute#6. Refer to 3.9.

■ For example slot configuration

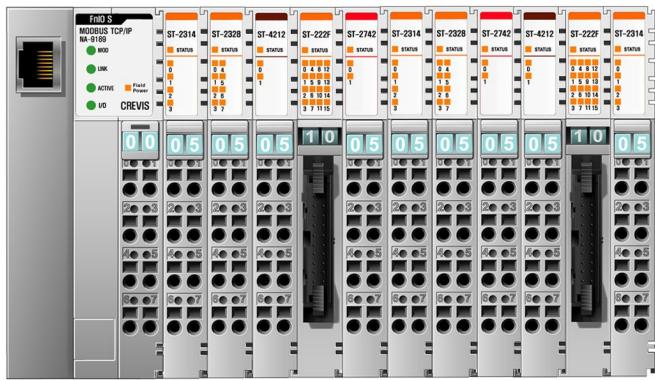

Slot Address	Module Description
#0	Ethernet/IP Adapter
#1	4-discrete output
#2	8-discrete output
#3	2-analog output
#4	16-discrete output
#5	4-discrete output
#6	8-discrete output
#7	2-real output
#8	2-real output
#9	2-analog output
#10	16-discrete output
#11	4-discrete output

■ Output Process Image Mode#0 (Uncompressed Output Processing Data), default output image

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0	Empty, Don't care						Discrete Output 4 pts (Slot#1)	
1							Discrete Output 8 pts (Slot#2)	
2							Analog Output Ch0 low byte (Slot#3)	
3							Analog Output Ch0 high byte (Slot#3)	
4							Analog Output Ch1 low byte (Slot#3)	
5							Analog Output Ch1 high byte (Slot#3)	
6							Discrete Output low 8 pts (Slot#4)	
7							Discrete Output high 8 pts (Slot#4)	
8	Empty, Don't care						Discrete Output 4 pts (Slot#5)	
9							Discrete Input 8 pts (Slot#6)	
10	Empty, Don't care						Discrete Output 2 pts (Slot#7)	
11	Empty, Don't care						Discrete Output 2 pts (Slot#8)	
12							Analog Output Ch0 low byte (Slot#9)	
13							Analog Output Ch0 high byte (Slot#9)	
14							Analog Output Ch1 low byte (Slot#9)	
15							Analog Output Ch1 high byte (Slot#9)	
16							Discrete Output low 8 pts (Slot#10)	
17							Discrete Output high 8 pts (Slot#10)	
18	Empty, Don't care						Discrete Output 4 pts (Slot#11)	

■ Output Process Image Mode#1 (Compressed Output Processing Data)

Byte	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0					Analog Output Ch0 low byte (Slot#3)			
1					Analog Output Ch0 high byte (Slot#3)			
2					Analog Output Ch1 low byte (Slot#3)			
3					Analog Output Ch1 high byte (Slot#3)			
4					Analog Output Ch0 low byte (Slot#9)			
5					Analog Output Ch0 high byte (Slot#9)			
6					Analog Output Ch1 low byte (Slot#9)			
7					Analog Output Ch1 high byte (Slot#9)			
8					Discrete Output 8 pts (Slot#2)			
9					Discrete Output low 8 pts (Slot#4)			
10					Discrete Output high 8 pts (Slot#4)			
11					Discrete Input 8 pts (Slot#6)			
12					Discrete Output low 8 pts (Slot#10)			
13					Discrete Output high 8 pts (Slot#10)			
14				Discrete Output 4 pts (Slot#5)			Discrete Output 4 pts (Slot#1)	
15	Discrete Output 2 pts (Slot#8)		Discrete Output 2 pts (Slot#7)				Discrete Output 4 pts (Slot#11)	

- Output Assembly Priority:
 - 1) Analog Output Data (Word type)
 - 2) 8 or 16 points Discrete Output Data (Byte type)
 - 3) 4 points Output Data (Bit type)
 - 4) 2 points Output Data (Bit type)

3. OBJECT MODELS

Every CIP node is modeled as a collection of objects. An object provides an abstract representation of a particular component within a device. Anything not described in object form is not visible through the CIP protocol. CIP objects are structured into classes, instances, and attributes.

A class of objects represents the same kind of system component. An object instance is the actual representation of a particular object within a class. Each instance of a class has the same attributes, but it has its own particular set of attribute values.

The objects and their components are addressed by a uniform addressing scheme consisting of :

- Media Access Control Identifier (MAC ID), an integer identification value assigned to each node on a CIP network.
- Class Identifier (Class ID), an integer identification value assigned to each Object Class accessible from the network.
- Instance Identifier (Instance ID), an integer identification value assigned to an Object Instance that identifies it among all Instances of the same Class.
- Attribute Identifier (Attribute ID), an integer identification value assigned to a Class and/or Instance Attribute.
- Service Code, an integer identification value which denotes a particular Object Instance and/or Object Class function.

3.1. Supported Objects

■ Supported Object

Name of Object	Type	Number of Instances	Class Code
Identity	Required	1	01 _{HEX}
Message Router	Required	1	02 _{HEX}
Assembly	Required	2	04 _{HEX}
Connection Manager	Required	1	06 _{HEX}
Port	Required	1	F4 _{HEX}
TCP/IP Interface	Required	1	F5 _{HEX}
Ethernet Link	Required	1	F6 _{HEX}
FnBus Manager	Vendor-specific	1	70 _{HEX}
Expansion Slot	Vendor-specific	1~32	71 _{HEX}

3.2. Identity Object

Class Code: 01_{HEX}

3.2.1. Common Services

Service Code	Implemented for		Service Name	Value
	Class	Instance		
0x01	Yes	Yes	Get_Attribute_All	
0x05	No	Yes	Reset	0: Reset Only 1: Reset and Factory Default
0x0E	No	Yes	Get_Attribute_Single	

3.2.2. Class Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
0	1	Get	Revision	UINT	0001 _{HEX} x
	2	Get	Max Instance	UINT	0001 _{HEX}
	6	Get	Maximum ID Number Class Attributes	UINT	0000 _{HEX}
	7	Get	Maximum ID Number Instance Attributes	UINT	0000 _{HEX}

3.2.3. Instance Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1	1	Get	Vendor ID	UINT	741 _{DEC} (Crevis Co., Ltd)
	2	Get	Device Type	UINT	0C _{HEX} (Communications Adapter)
	3	Get	Product Code	UINT	512 _{DEC} (NA-9188)
	4	Get	Revision - Major - Minor	Structure of: USINT USINT	1 ~ 9 1 ~ 255
	5	Get	Status	WORD	Defined in Spec.
	6	Get	Serial Number	UDINT	Unique Number
	7	Get	Product Name - String Length - ASCII String	Short_String USINT STRING	24 _{DEC} “NA9188_Ethernet/IP_Adapter”
	<i>Vendor-specific</i>				
	100	Get	Device Fault Code	USINT	00 _{HEX} : Normal Operation Bit 0: No expansion slot Bit 1: Too many expansion slot Bit 2: Overflow I/O size Bit 3: I/O Configuration failure Bit 4: EEPROM Checksum fault Bit 6: Invalid Module ID Bit 7: Firmware fault
	104	Get	Firmware Release Date	UDINT	YYYYMMDD _{HEX}

--	--	--	--	--	--

3.3. Message Router Object

Class Code: 02_{HEX}

3.3.1. Common Services

Service Code	Implemented for		Service Name
	Class	Instance	
0x01	Yes	No	Get Attribute All
0x0E	No	Yes	Get Attribute Single

3.3.2. Class Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
0	1	Get	Revision	UINT	0001 _{HEX}
	4	Get	Number of Attribute	UINT	0001 _{HEX}
	5		Number of Service	UINT	0000 _{HEX}
	6	Get	Maximum ID Number Class Attributes	UINT	0000 _{HEX}
	7	Get	Maximum ID Number Instance Attributes	UINT	0000 _{HEX}

3.3.3. Instance Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1	1	Get	Object List	STRUCT of UINT Array of UINT	9 _{DEC} 01 00 02 00 04 00 06 00 F4 00 F5 00 F6 00 70 00 71 00
	2	Get	Number Available	UINT	16 _{DEC} Maximum number of connections supported

3.4. Assembly Object

Class Code: 04_{HEX}

3.4.1. Common Services

Service Code	Implemented for		Service Name
	Class	Instance	
0x0E	No	Yes	Get Attribute Single
0x10	No	Yes	Set Attribute Single

3.4.2. Class Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
0	1	Get	Revision	UINT	0002 _{HEX}
	2	Get	Max Instance	UINT	

3.4.3. Instance Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
Input/ Output Instance ID	3	Get/Set	Data	Array n BYTE	Input/Output process image data

■ Input/Output Instance ID

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1 (0x01)	3	Get	Input (Produced) Process Image Data	Array n BYTE	Input process image data
2 (0x02)	3	Set/Get	Output (Consumed) Process Image Data	Array n BYTE	Output process image data

- Configuration Instance is 170(AA_{HEX}). There is no configuration data needed.
- Heartbeat Instance is 171(AB_{HEX}) for input only connection.
- Listen only Instance is 172(AC_{HEX}) for multicast listening.

3.5. Connection Manager Object

Class Code: 06_{HEX}

3.5.1. Class Attributes, Instance Attribute

None

3.6. Port Object

Class Code: F4_{hex}

3.6.1. Common Services

Service Code	Implemented for		Service Name
	Class	Instance	
0x01	Yes	Yes	Get Attribute All
0x0E	Yes	Yes	Get Attribute Single

3.6.2. Class Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
0	1	Get	Revision	UINT	0001 _{HEX}
	2	Get	Max Instance	UINT	0001 _{HEX}
	3	Get	Num Instances	UINT	0001 _{HEX}
	8	Get	Entry Port	UINT	0001 _{HEX}
	9	Get	All Ports	ARRAY of STRUCT UINT UINT UINT	0000 _{HEX} 0000 _{HEX} 0004 _{HEX} 0002 _{HEX}

3.6.3. Instance Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1	1	Get	Port Type	UINT	0004 _{HEX} , TCP/IP Port
	2	Get	Port Number	UINT	0002 _{HEX} , CIP port number associate with port
	3	Get	Port Object	UINT Padded EPATH	
	4	Get	Port Name	Short String	=0
	7	Get	Node Address	Padded EPATH	

3.7. TCP/IP Object

Class Code: F5_{HEX}

3.7.1. Common Services

Service Code	Implemented for		Service Name
	Class	Instance	
0x01	Yes	Yes	Get Attribute All
0x0E	Yes	Yes	Get Attribute Single
0x02	No	Yes	Set Attribute All
0x10	No	Yes	Set Attribute Single

3.7.2. Class Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
0	1	Get	Revision	UINT	0001 _{HEX}
	2	Get	Max Instance	UINT	0001 _{HEX}
	3	Get	Num Instances	UINT	

3.7.3. Instance Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1	1	Get	Status	DWORD	
	2	Get	Configuration Capability	DWORD	00000006 _{HEX}
	3	Get/Set	Configuration Control	DWORD	00000010 _{HEX}
	4	Get	Physical Link Path Size of Path Path	STRUCT of: UINT Padded- PATH	0002 _{HEX} 20 F6 24 01
	5	Get/Set	Interface Configuration	STRUCT of: UDINT UDINT UDINT UDINT UDINT STRING	
	6	Get/Set	HOST Name	STRING	

3.8. Ethernet Link Object

Class Code: F6_{HEX}

3.8.1. Common Services

Service Code	Implemented for		Service Name
	Class	Instance	
0x01	Yes	Yes	Get Attribute All
0x0E	Yes	Yes	Get Attribute Single

3.8.2. Class Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
0	1	Get	Revision	UINT	0002 _{HEX}
	2	Get	Max Instance	UINT	0001 _{HEX}
	3	Get	Num Instances	UINT	0001 _{HEX}

3.8.3. Instance Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1	1	Get	Interface Speed	UDINT	10 _{DEC} , 100 _{DEC}
	2	Get	Interface Flags	DWORD	Bit 0 : Link Active Bit 1 : Full Duplex Bit 2~4 : Auto negotiation Bit 5 : Manual Setting required Reset Bit 6 : Local Hardware Fault Others : 0
	3	Get	Physical Address	ARRAY of 6 USINTs	Same as MAC address

3.9. FnBus Manager Object

Class Code: 70 HEX

3.9.1. Common Services

Service Code	Implemented for		Service Name
	Class	Instance	
0x0E	No	Yes	Get Attribute Single
0x10	No	Yes	Set Attribute Single

3.9.2. Class Attributes

None

3.9.3. Instance Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1	1	Get	Number of Slot	USINT	(include deactivated slot)
	2	Get	Num of Activated Slot	USINT	
	3	Get	Num of Deactivated Slot	USINT	
	4	Get	External IDs	Array of 33 BYTE	See Table 3.9.6. See Appendix A.1.
	5	Get/Set*	Selection of Input (Produced) Process Image Mode	USINT	See Table 3.9.1. Valid value range is 0,1,2,3 (default 2)
	6	Get/Set*	Selection of Output (Consumed) Process Image Mode	USINT	See Table 3.9.2. Valid value range is 0,1 (default 0)
	7	Get/Set*	Slot Active Flag	DWORD	See Table 3.9.3
	8	Get	Slot Live List	DWORD	See Table 3.9.4.
	9	Get	Slot Alarm List	DWORD	See Table 3.9.5.
	10	Get	Fn-Bus Status	USINT	0: Normal Operation 1: Fn-Bus Standby 2: Fn-Bus Connection Fault 3: Expansion Configuration Fault 4: No Expansion Module
	11	Get	Input (Produced) Byte Size	UINT	Read IO input data size
	12	Get	Output (Consumed) Byte Size	UINT	Read IO output data size
	13	Get/Set* TBD	Enable Input Run/Idle Header (Default)	BOOL	0:Disabled 1:Enabled Input Run/Idle Header
	14	Get/Set* TBD	Enable Output Run/Idle Header (Default)	BOOL	0:Disabled 1:Enabled Output Run/Idle Header
	32	Get	Real IO Input Data	Array n BYTE	Real IO input data

	33	Get/Set	Real IO Output Data	Array n BYTE	Real IO output data
	112	Set	Scan Command		Vendor only
	113	Get	Run Time Fault Code		Vendor only
	150	Get	FnBus Revision	UINT	Vendor only
	151	Get	Vendor Code	USINT	Vendor only
	224	Get	All ST- name	Array of UINTs	Vendor only
	226	Get	Scan Time	UINT UINT	Vendor only

*After the system is reset, the new “Set Value” action is applied.

If changed slot location, set default value automatically.

● **Table 3.9.1. Selection of Input (Produced) Process Image Mode**

Selection Input Image Mode	Description	
0	Status(2byte) + Uncompressed Input Processing Data (default)	
1	Status(2byte) + Compressed Input Processing Data	
2	Uncompressed Input Processing Data	default
3	Compressed Input Processing Data	

● **Table 3.9.2. Selection of Output (Consumed) Process Image Mode**

Selection Output Image Mode	Description	
0	Uncompressed Output Processing Data (default)	default
1	Compressed Output Processing Data	

● **Table 3.9.3. Slot Active Flag**

DWORD(32bits)	Decimal Bit	Description
Get/Set	Bit 00	Activate/Deactivate flag for slot position #1 (0:Active, 1:Decative)
	Bit 01	Activate/Deactivate flag for slot position #2 (0:Active, 1:Decative)
	Bit 02	Activate/Deactivate flag for slot position #3 (0:Active, 1:Decative)
	.	.
	Bit 30	Activate/Deactivate flag for slot position #31 (0:Active, 1:Decative)
	Bit 31	Activate/Deactivate flag for slot position #32 (0:Active, 1:Decative)

● **Table 3.9.4. Slot Live List**

DWORD(32bits)	Decimal Bit	Description
Get/Set	Bit 00	This bit is set (1) when slot position #1 is available to exchange IO
	Bit 01	This bit is set (1) when slot position #2 is available to exchange IO
	Bit 02	This bit is set (1) when slot position #3 is available to exchange IO
	.	.
	Bit 30	This bit is set (1) when slot position #31 is available to exchange IO
	Bit 31	This bit is set (1) when slot position #32 is available to exchange IO

● Table 3.9.5. Slot Alarm List

DWORD(32bits)	Decimal Bit	Description
Get/Set	Bit 00	This bit is set (1) when an error is detected in slot position #1
	Bit 01	This bit is set (1) when an error is detected in slot position #2
	Bit 02	This bit is set (1) when an error is detected in slot position #3
	.	.
	Bit 30	This bit is set (1) when an error is detected in slot position #31
	Bit 31	This bit is set (1) when an error is detected in slot position #32

● Table 3.9.6. External IDs (=Expansion Module ID)

Byte	Description
0	Network Adapter Module External ID = 0x00
1	External ID for slot position #1
2	External ID for slot position #2
3	External ID for slot position #3
4	External ID for slot position #4
5	External ID for slot position #5
6	External ID for slot position #6
7	External ID for slot position #7
8	External ID for slot position #8
9	External ID for slot position #9
10	External ID for slot position #10
11	External ID for slot position #11
12	External ID for slot position #12
13	External ID for slot position #13
14	External ID for slot position #14
15	External ID for slot position #15
16	External ID for slot position #16
17	External ID for slot position #17
18	External ID for slot position #18
19	External ID for slot position #19
20	External ID for slot position #20
21	External ID for slot position #21
22	External ID for slot position #22
23	External ID for slot position #23
24	External ID for slot position #24
25	External ID for slot position #25
26	External ID for slot position #26
27	External ID for slot position #27
28	External ID for slot position #28
29	External ID for slot position #29
30	External ID for slot position #30
31	External ID for slot position #31
32	External ID for slot position #32

3.10. Expansion Slot Object

Class Code: 71 HEX

3.10.1. Common Services

Service Code	Implemented for		Service Name
	Class	Instance	
0x0E	No	Yes	Get Attribute Single
0x10	No	Yes	Set Attribute Single

3.10.2. Class Attributes

None

3.10.3. Instance Attributes

Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1~32 (Slot Address)	1	Get	Module External ID	USINT	See Appendix A.1.
	2	Get	I/O Data Code - Input Data Code - Output Data Code	Structure of: USINT USINT	See Table 3.10.1.
	3	Get	Input Offset Table - Byte Offset - Bit Offset	Structure of: USINT USINT	Byte offset in the Input Assembly Corresponding bit offset in the byte (If Input data length is zero, then return Empty.)
	4	Get	Output Offset Table - Byte Offset - Bit Offset	Structure of: USINT USINT	Byte offset in the Output Assembly Corresponding bit offset in the byte (If Output data length is zero, then return Empty.)
	5	Get	Input Data	Array of BYTE	Read Input data size defined by attribute 2. If Input data length is zero, then return Empty.
	6	Get/Set	Output Data	Array of BYTE	Read/Write Output data size defined by attribute 2. If Output data length is zero, then return Empty.
	7	Get/Set*	Active Flag	BOOL	0: This slot is activated 1: This slot is deactivated
	8	Get	Configuration Parameter Data length	USINT	See Appendix A.2.
	9	Get/Set	R/W Configuration Data	n Byte	Data array size defined by attribute 8.
	10	Get	Register Data Length	USINT	See Appendix A.3.

	11	Get/Set	R/W Register Data - Offset Low - Offset High - R/W Length - Write Data	Structure of: USINT USINT USINT n Byte	Read data array size defined by attribute 10. . R/W Length ≤ 32byte . Offset+Length ≤ attribute 9
	15	Get/Set	R/W Maintenance Data - Module Serial ID - Offset - R/W Length - Write Data	Structure of: USINT USINT USINT n Byte	Vendor only Module Serial ID = Attribute 1 R/W Length ≤ 32byte
	100	Get	Product Code	4 Byte	See Table 3.10.2. and Appendix A.1.
	101	Get	Catalog Number	4 Byte	See Appendix A.1.
	102	Get	Firmware Revision	Structure of: USINT USINT	Expansion Module Firmware Revision
	113	Get/Set	Expansion Class		Vendor only
	150	Get	FnBus Revision	Structure of: USINT USINT	Vendor only
	224	Get	ST- name	UINT	Vendor only
	225	Get	Module Descriptions	Short String	Vendor only

*After the system is reset, the new “Set Value” action is applied.

If changed slot location, set default value automatically.

● **Table 3.10.1. I/O Data Code Format**

Byte#	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
+0	Input Data Type							Input Data Length
+1	Output Data Type							Output Data Length

□ **Input/Output Type :**

- 0 0: No I/O Data
- 0 1: Byte Data
- 1 0: Word Data
- 1 1: Bit Data

□ **Input/Output Data Length:**

- 0 0 0 0 0 0 : 0 Bit/Byte/Word
- 0 0 0 0 0 1 : 1 Bit/Byte/Word
- 0 0 0 0 0 1 0 : 2 Bit/Byte/Word
- 0 0 0 0 0 1 1 : 3 Bit/Byte/Word

...

1 1 1 1 1 1 1 : 63 Bit/Byte/Word

● **Table 3.10.2. Product Code Format**

Byte#	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
+0	Connection Type							
+1	Assembly Type							

+2	Output Information							
+3	Input Information							

Connection Type

Byte#	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
+0	Reserved					Mem	IO	

- **IO (Input/Output Connection) :**
 - IO = 0 : does not support Input/Output Connection
 - IO = 1 : support Input/Output Connection
- **MEM (Memory Register Service) :**
 - MEM = 0 : does not support Memory Register Service Connection
 - MEM = 1 : support Memory Register Service Connection

Assembly Type

Byte#	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
+1	Unit_Type	Priority		S	Reserved			

- **Unit_Type :**
 - 0 0 : Not Used
 - 0 1 : Input Module
 - 1 0 : Output Module
 - 1 1 : I/O Both Module
- **Priority (Input/Output Data Priority for assembly) :**
 - 0 0: Priority 0 (low) - usually it is used by Byte/Bit Type Discrete module.
 - 0 1: Priority 1
 - 1 0: Priority 2 - usually it is used by Analog I/O module.
 - 1 1: Priority 3 (high)
- **S (Status for Profibus Slot Diagnostic) :**
 - 0: No Status
 - 1: Support Word Input Diagnostic(0x8000 = -32678)

for example: ST-3234(current analog input 4~20mA, 14bit)

Status	Input Data
Normal	0x0000 (4mA) ~ 0x3FFF (20mA)
Open Wire or Underrange (0~3mA)	0x8000 (-32678)

Input/Output Information

Byte#	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
+2	Data_Type	Data_Length						
+3	Data_Type	Data_Length						

Output Information

Input Information

- **Data_Type :**
0 0 : Byte Data
0 1 : Word Data
1 0 : Bit Data
1 1 : have no Input or Output Data
- **Data_Length :**
0 0 0 0 0 0 : 1 Bit/Byte/Word
0 0 0 0 0 1 : 2 Bit/Byte/Word
0 0 0 0 0 1 0 : 3 Bit/Byte/Word
0 0 0 0 0 1 1 : 4 Bit/Byte/Word
0 0 0 0 1 0 0 : 5 Bit/Byte/Word
0 0 0 0 1 0 1 : 6 Bit/Byte/Word
0 0 0 0 1 1 0 : 7 Bit/Byte/Word
0 0 0 0 1 1 1 : 8 Byte/Word
0 0 0 1 0 0 0 : 9 Byte/Word
...
1 1 1 1 1 1 0 : 63 Byte/Word
1 1 1 1 1 1 1 : 64 Byte/Word

3.11. Ethernet/IP Reference

Ethernet/IP Reference Documents

<http://www.odva.org>
<http://www.ethernet-ip.org>

Ethernet/IP Tools

<http://www.pyramid-solutions.com>

APPENDIX A

A.1. Product List

No.	ST-Number	Description	Module Id (hex)	Catalog Number	Product Code
1	ST-1214	4-sinking input, 24Vdc	03	00 03 00 41	83 C0 40 01
2	ST-1224	4-sourcing input, 24Vdc	04	00 04 00 41	83 C0 40 01
3	ST-1218	8-sinking input, 24Vdc	07	00 07 00 41	00 C0 40 01
4	ST-1228	8-sourcing input, 24Vdc	08	00 08 00 41	00 C0 40 01
5	ST-121F	16-sinking input, 24Vdc	13	00 13 01 41	01 C0 40 01
6	ST-122F	16-sourcing input, 24Vdc	14	00 14 01 41	01 C0 40 01
7	ST-1314	4-sinking input, 48Vdc	05	00 05 00 41	83 C0 40 01
8	ST-1324	4-sourcing input, 48Vdc	06	00 06 00 41	83 C0 40 01
9	ST-1804	4-ac input, 110Vac	09	00 09 00 41	83 C0 40 01
10	ST-1904	4-ac input, 220Vac	0A	00 0A 00 41	83 C0 40 01
11	ST-2314	4-sinking output, 24Vdc 0.5A	0E	00 0E 00 81	C0 83 80 01
12	ST-2324	4-sourcing output, 24Vdc 0.5A	10	00 10 00 81	C0 83 80 01
13	ST-2318	8-sinking output, 24Vdc 0.5A	11	00 11 00 81	C0 00 80 01
14	ST-2328	8-sourcing output, 24Vdc 0.5A	12	00 12 00 81	C0 00 80 01
15	ST-221F	16-sinking output, 24Vdc 0.3A	15	00 15 01 81	C0 01 80 01
16	ST-222F	16-sourcing output, 24Vdc 0.3A	16	00 16 01 81	C0 01 80 01
17	ST-2414	4-sinking output, diag, 24Vdc 0.5A	37	37 00 00 C1	83 83 C0 01
18	ST-2424	4-sourcing output, diag, 24Vdc 0.5A	38	38 00 00 C1	83 83 C0 01
19	ST-2514	4-sinking output, diag, 24Vdc 2A	35	35 00 00 C1	83 83 C0 01
20	ST-2524	4-sourcing output, diag, 24Vdc 2A	36	36 00 00 C1	83 83 C0 01
21	ST-2742	2-relay output, 230Vac 2A	0B	00 0B 00 81	C0 81 80 01
22	ST-2852	2-triac output, 120Vac 0.5A	0C	00 0C 00 81	C0 81 80 01
23	ST-3114	4-current analog input, 0~20mA, 12bit	1C	00 1C 43 41	43 C0 60 03
24	ST-3134	4-current analog input, 0~20mA, 14bit	1E	00 1E 43 41	43 C0 60 03
25	ST-3214	4-current analog input, 4~20mA, 12bit	1D	00 1D 43 41	43 C0 68 03
26	ST-3234	4-current analog input, 4~20mA, 14bit	1F	00 1F 43 41	43 C0 68 03
27	ST-3424	4-voltage analog input, 0~10V, 12bit	20	00 20 43 41	43 C0 60 03
28	ST-3444	4-voltage analog input, 0~10V, 14bit	22	00 22 43 41	43 C0 60 03
29	ST-3524	4-voltage analog input, -10~10V, 12bit	21	00 21 43 41	43 C0 60 03
30	ST-3544	4-voltage analog input, -10~10V, 14bit	23	00 23 43 41	43 C0 60 03
31	ST-3624	4-voltage analog input, 0~5V, 12bit	24	00 24 43 41	43 C0 60 03
32	ST-3644	4-voltage analog input, 0~5V, 14bit	25	00 25 43 41	43 C0 60 03
33	ST-3702	2-RTD/Resistance input	28	00 28 41 41	41 C0 68 03
34	ST-3802	2-Thermocouple/mV input	2A	00 2A 41 41	41 C0 68 03
35	ST-4112	2-current analog output, 0~20mA, 12bit	2C	00 2C 41 81	C0 41 A0 03
36	ST-4212	2-current analog output, 4~20mA, 12bit	2D	00 2D 41 81	C0 41 A0 03
37	ST-4422	2-voltage analog output, 0~10Vdc, 12bit	2E	00 2E 41 81	C0 41 A0 03
38	ST-4522	2-voltage analog output, -10~10Vdc, 12bit	2F	00 2F 41 81	C0 41 A0 03
39	ST-4622	2-voltage analog output, 0~5Vdc, 12bit	30	00 30 41 81	C0 41 A0 03
40	ST-5101	1 Channel, High Speed Counter, 5Vdc	34	34 05 01 C1	05 01 D0 03
41	ST-5111	1 Channel, High Speed Counter, 24Vdc	39	39 05 01 C1	05 01 D0 03
42	ST-5241	2-Axes Motion Controller *	41	41 07 07 C1	07 07 D0 01

43	1-channel RS232 Communication **			
44	2-channel RS232 Communication **			
45	1-channel RS422 Communication **			
46	1-channel RS485 Communication **			
47	2-channel RS485 Communication **			
48	4-input, 5Vdc **			
49	4-output, 5Vdc 20mA **			

* Under development.

** Under planning.

A.2. Configuration Parameter

A.2.1. ST-1214 (4-sinking input, 24Vdc)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.2. ST-1224 (4-sourcing input, 24Vdc)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.3. ST-1218 (8-sinking input, 24Vdc)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.4. ST-1228 (8-sourcing input, 24Vdc)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.5. ST-121F (16-sinking input, 24Vdc)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.6. ST-122F (16-sourcing input, 24Vdc)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.7. ST-1314 (4-sinking input, 48Vdc)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.8. ST-1324 (4-sourcing input, 48Vdc)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.9. ST-1804 (4-ac input, 110Vac)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.10. ST-1904 (4-ac input, 220Vac)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.11. ST-2314 (4-sinking output, 24Vdc 0.5A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-03	Fault Action (ch0~ch3) 0: Fault Value, 1: Hold last state	0 (Fault Value)
	04-07	Reserved	0
1	00-03	Fault Value (ch0~ch3) 0: off, 1: on	0 (off)
	04-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.12. ST-2324 (4-sourcing output, 24Vdc 0.5A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-03	Fault Action (ch0~ch3) 0: Fault Value, 1: Hold last state	0 (Fault Value)
	04-07	Reserved	0
1	00-03	Fault Value (ch0~ch3) 0: off, 1: on	0 (off)
	04-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.13. ST-2318 (8-sinking output, 24Vdc 0.5A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-07	Fault Action (ch0~ch7) 0: Fault Value, 1: Hold last state	0 (Fault Value)
1	00-07	Fault Value (ch0~ch7) 0: off, 1: on	0 (off)
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.14. ST-2328 (8-sourcing output, 24Vdc 0.5A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-07	Fault Action (ch0~ch7) 0: Fault Value, 1: Hold last state	0 (Fault Value)
1	00-07	Fault Value (ch0~ch7) 0: off, 1: on	0 (off)
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.15. ST-221F (16-sinking output, 24Vdc 0.3A)

- Valid Parameter length: 4 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-07	Fault Action (ch0~ch7) 0: Fault Value, 1: Hold last state	0 (Fault Value)
1	00-07	Fault Action (ch8~ch15) 0: Fault Value, 1: Hold last state	0 (Fault Value)
2	00-07	Fault Value (ch0~ch7) 0: off, 1: on	0 (off)
3	00-07	Fault Value (ch8~ch15) 0: off, 1: on	0 (off)
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.16. ST-222F (16-sourcing output, 24Vdc 0.3A)

- Valid Parameter length: 4 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-07	Fault Action (ch0~ch7) 0: Fault Value, 1: Hold last state	0 (Fault Value)
1	00-07	Fault Action (ch8~ch15) 0: Fault Value, 1: Hold last state	0 (Fault Value)
2	00-07	Fault Value (ch0~ch7) 0: off, 1: on	0 (off)
3	00-07	Fault Value (ch8~ch15) 0: off, 1: on	0 (off)
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.17. ST-2414 (4-sinking output, Diag, 24Vdc 0.5A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-03	Fault Action (ch0~ch3) 0: Fault Value, 1: Hold last state	0 (Fault Value)
	04-07	Reserved	0
1	00-03	Fault Value (ch0~ch3) 0: off, 1: on	0 (off)
	04-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.18. ST-2424 (4-sourcing output, Diag, 24Vdc 0.5A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-03	Fault Action (ch0~ch3) 0: Fault Value, 1: Hold last state	0 (Fault Value)
	04-07	Reserved	0
1	00-03	Fault Value (ch0~ch3) 0: off, 1: on	0 (off)
	04-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.19. ST-2514 (4-sinking output, Diag, 24Vdc 2A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-03	Fault Action (ch0~ch3) 0: Fault Value, 1: Hold last state	0 (Fault Value)
	04-07	Reserved	0
1	00-03	Fault Value (ch0~ch3) 0: off, 1: on	0 (off)
	04-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0

5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.20. ST-2524 (4-sourcing output, Diag, 24Vdc 2A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-03	Fault Action (ch0~ch3) 0: Fault Value, 1: Hold last state	0 (Fault Value)
	04-07	Reserved	0
1	00-03	Fault Value (ch0~ch3) 0: off, 1: on	0 (off)
	04-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.21. ST-2742 (2-relay output, 230Vac 2A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00, 01	Fault Action (ch0, ch1) 0: Fault Value, 1: Hold last state	0 (Fault Value)
	02-07	Reserved	0
1	00, 01	Fault Value (ch0, ch1) 0: off, 1: on	0 (off)
	02-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.22. ST-2852 (2-triac output, 120Vac 0.5A)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00, 01	Fault Action (ch0, ch1) 0: Fault Value, 1: Hold last state	0 (Fault Value)
	02-07	Reserved	0
1	00, 01	Fault Value (ch0, ch1) 0: off, 1: on	0 (off)

	02-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.23. ST-3114 (4-current analog input, 0~20mA, 12bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.24. ST-3134 (4-current analog input, 0~20mA, 14bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.25. ST-3214 (4-current analog input, 4~20mA, 12bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.26. ST-3234 (4-current analog input, 4~20mA, 14bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.27. ST-3424 (4-voltage analog input, 0~10V, 12bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.28. ST-3444 (4-voltage analog input, 0~10V, 14bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.29. ST-3524 (4-voltage analog input, -10~10V, 12bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.30. ST-3544 (4-voltage analog input, -10~10V, 14bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.31. ST-3624 (4-voltage analog input, 0~5V, 12bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.32. ST-3644 (4-voltage analog input, 0~5V, 14bit)

- Valid Parameter length: 0 bytes
- Parameter Data: All of Parameter Data is not used.

A.2.33. ST-3702 (2- RTD/Resistance input)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-07	The selection Sensor Type =00h:PT100, 0.00385, -200~850°C, 0.1°C /count =01h:PT200, 0.00385, -200~850°C, 0.1°C/count =02h:PT500, 0.00385, -200~850°C, 0.1°C/count =03h:PT1000, 0.00385, -200~350°C, 0.1°C/count =04h:PT50, 0.00385, -200~850°C, 0.1°C/count =10h:JPT100, 0.003916, -200~640°C, 0.1°C/count =11h:JPT200, 0.003916, -200~640°C, 0.1°C/count =12h:JPT500, 0.003916, -200~640°C, 0.1°C/count =13h:JPT1000, 0.003916, -200~350°C, 0.1°C/count =20h:NI100, 0.00618, -60~250°C, 0.1°C/count =21h:NI200, 0.00618, -60~250°C, 0.1°C/count =22h:NI500, 0.00618, -60~250°C, 0.1°C/count =23h:NI1000, 0.00618, -60~180°C, 0.1°C/count =30h:NI120, 0.00672, -80~250°C, 0.1°C/count =40h:CU10, 0.00427, -200~260°C, 0.1°C/count =80h:Resistance Input, 1~2000Ω, 100mΩ /1count =81h: Resistance Input, 1~327Ω, 10mΩ/1count =82h: Resistance Input, 1~620Ω, 20mΩ/1count =Others: Reserved	0: PT100
1	00	Temperature Type 0: Celsius(°C), 1: Fahrenheit(°F)	0: Celsius(°C)
	01-03	Reserved	0
	04	Filter Type 0: Normal Filter, 1: Enhanced Filter	0: Normal Filter
	05-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.2.34. ST-3802 (2- Thermocouple/mV input)

- Valid Parameter length: 2 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-07	The selection Sensor Type =00h: Type K, 0.1°C/count =01h: Type J, 0.1°C/count =02h: Type T, 0.1°C/count =03h: Type B, 0.1°C/count =04h: Type R, 0.1°C/count =05h: Type S, 0.1°C/count =06h: Type E, 0.1°C/count =07h: Type N, 0.1°C/count =08h: Type L, 0.1°C/count =09h: Type U, 0.1°C/count =0Ah: Type C, 0.1°C/count =0Bh: Type D, 0.1°C/count =80h: 10uV Input, -78.0~78.0mV, 10uV/count =81h: 1uV Input, -32.7~32.7mV, 1uV/count =82h: 2uV Input, -65.5~65.5mV, 2uV/count =Others: Reserved	0: Type K
1	00	Temperature Type 0: Celsius(°C), 1: Fahrenheit(°F)	0: Celsius(°C)
	01	0: Cold Junction Compensation 1: Disable Compensation	0
	02, 03	Reserved	0
	04	Filter Type 0: Normal Filter, 1: Enhanced Filter	0: Normal Filter
	05-07	Reserved	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

- A.2.35. ST-4112 (2-current analog output, 0~20mA, 12bit)
- A.2.36. ST-4212 (2-current analog output, 4~20mA, 12bit)
- A.2.37. ST-4422 (2-voltage analog output, 0~10Vdc, 12bit)
- A.2.38. ST-4522 (2-voltage analog output, -10~10Vdc, 12bit)
- A.2.39. ST-4622 (2-voltage analog output, 0~5Vdc, 12bit)

- Valid Parameter length: 6 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-01	Fault Action for channel 0 00: Fault Value, 01: Hold last state, 10: Low Limit, 11:High Limit	0 (Fault Value)
	02-03	Fault Action for channel 0 00: Fault Value, 01: Hold last state, 10: Low Limit, 11:High Limit	0 (Fault Value)
	04-07	Reserved	0
1	00-07	Reserved	0
2	00-07	Channel 0 Fault Value Low Byte	0
3	00-03	Channel 0 Fault Value High Byte	0
	04-07	Reserved	0
4	00-07	Channel 1 Fault Value Low Byte	0
5	00-03	Channel 1 Fault Value High Byte	0
	04-07	Reserved	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

- A.2.40. ST-5101 (1 Channel High Speed Counter 5Vdc)

- A.2.41. ST-5111 (1 Channel High Speed Counter 24Vdc)

- Valid Parameter length: 6 bytes
- Parameter Data:

Offset	Decimal Bit	Description	Default Value
0	00-03	Counter Mode	0
	04-07	Gate Function	0
1	00-03	Input Filter	0
	04-07	Gate Sampling Time	0
2	00-07	Not used	0
3	00-07	Not used	0
4	00-07	Not used	0
5	00-07	Not used	0
6	00-07	Not used	0
7	00-07	Not used	0

* All values are stored in Adapter's EEPROM.

A.3. Memory Register

A.3.1. ST-1214 (4-sinking input, 24Vdc)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.2. ST-1224 (4-sourcing input, 24Vdc)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.3. ST-1218 (8-sinking input, 24Vdc)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.4. ST-1228 (8-sourcing input, 24Vdc)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.5. ST-121F (16-sinking input, 24Vdc)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.6. ST-122F (16-sourcing input, 24Vdc)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.7. ST-1314 (4-sinking input, 48Vdc)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.8. ST-1324 (4-sourcing input, 48Vdc)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.9. ST-1804 (4-ac input, 110Vac)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.10. ST-1904 (4-ac input, 220Vac)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.11. ST-2314 (4-sinking output, 24Vdc 0.5A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.12. ST-2324 (4-sourcing output, 24Vdc 0.5A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.13. ST-2318 (8-sinking output, 24Vdc 0.5A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.14. ST-2328 (8-sourcing output, 24Vdc 0.5A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.15. ST-221F (16-sinking output, 24Vdc 0.1A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.16. ST-222F (16-sourcing output, 24Vdc 0.1A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.17. ST-2414 (4-sinking output, Diag, 24Vdc 0.5A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.18. ST-2424 (4-sourcing output, Diag, 24Vdc 0.5A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.19. ST-2514 (4-sinking output, Diag, 24Vdc 2A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.20. ST-2524 (4-sourcing output, Diag, 24Vdc 2A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.21. ST-2742 (2-relay output, 230Vac 2A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.22. ST-2852 (2-triac output, 120Vac 0.5A)

- Memory Register length: 0 bytes
- Memory Register: none

A.3.23. ST-3114 (4-current analog input, 0~20mA, 12bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-03	Channel 0 Input Data High 4 bits	
		04-07	not used	0
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-03	Channel 1 Input Data High 4 bits	
		04-07	not used	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-03	Channel 2 Input Data High 4 bits	
		04-07	not used	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-03	Channel 3 Input Data High 4 bits	
		04-07	not used	0
8	R	00-07	Reserved	0
9	R	00-07	Reserved	0

A.3.24. ST-3134 (4-current analog input, 0~20mA, 14bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-05	Channel 0 Input Data High 6 bits	
		06, 07	not used	0
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-05	Channel 1 Input Data High 6 bits	
		06, 07	not used	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-05	Channel 2 Input Data High 6 bits	
		06, 07	not used	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-05	Channel 3 Input Data High 6 bits	
		06, 07	not used	0
8	R	00-07	Reserved	0
9	R	00-07	Reserved	0

A.3.25. ST-3214 (4-current analog input, 4~20mA, 12bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-03	Channel 0 Input Data High 4 bits	
		04-07	not used	0
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-03	Channel 1 Input Data High 4 bits	
		04-07	not used	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-03	Channel 2 Input Data High 4 bits	
		04-07	not used	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-03	Channel 3 Input Data High 4 bits	
		04-07	not used	0
8	R	00-03	Alarm Status Bit for individual channels - Bit 00 corresponds to input channel 0, bit 01 corresponds to input channel 1, and so on. When set(1), the input signal is below the input channel's minimum range(3mA). And Input Data will be 0x8000(-32678)	
		04-07	Reserved	0
9	R	00-07	Reserved	0

A.3.26. ST-3234 (4-current analog input, 4~20mA, 14bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-05	Channel 0 Input Data High 6 bits	
		06, 07	not used	0
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-05	Channel 1 Input Data High 6 bits	
		06, 07	not used	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-05	Channel 2 Input Data High 6 bits	
		06, 07	not used	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-05	Channel 3 Input Data High 6 bits	
		06, 07	not used	0
8	R	00-03	Alarm Status Bit for individual channels - Bit 00 corresponds to input channel 0, bit 01 corresponds to input channel 1, and so on. When set(1), the input signal is below the input channel's minimum range(3mA). And Input Data will be 0x8000(-32678)	
		04-07	Reserved	0
9	R	00-07	Reserved	0

A.3.27. ST-3424 (4-voltage analog input, 0~10V, 12bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-03	Channel 0 Input Data High 4 bits	
		04-07	not used	0
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-03	Channel 1 Input Data High 4 bits	
		04-07	not used	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-03	Channel 2 Input Data High 4 bits	
		04-07	not used	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-03	Channel 3 Input Data High 4 bits	
		04-07	not used	0
8	R	00-07	Reserved	0
9	R	00-07	Reserved	0

A.3.28. ST-3444 (4-voltage analog input, 0~10V, 14bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-05	Channel 0 Input Data High 6 bits	
		06, 07	not used	0
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-05	Channel 1 Input Data High 6 bits	
		06, 07	not used	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-05	Channel 2 Input Data High 6 bits	
		06, 07	not used	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-05	Channel 3 Input Data High 6 bits	
		06, 07	not used	0
8	R	00-07	Reserved	0
9	R	00-07	Reserved	0

A.3.29. ST-3524 (4-voltage analog input, -10~10V, 12bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-06	Channel 0 Input Data High 7 bits	
		07	Sign Bit	
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-06	Channel 1 Input Data High 7 bits	
		07	Sign Bit	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-06	Channel 2 Input Data High 7 bits	
		07	Sign Bit	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-06	Channel 3 Input Data High 7 bits	
		07	Sign Bit	0
8	R	00-07	Reserved	0
9	R	00-07	Reserved	0

A.3.30. ST-3544 (4-voltage analog input, -10~10V, 14bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-06	Channel 0 Input Data High 7 bits	
		07	Sign Bit	
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-06	Channel 1 Input Data High 7 bits	
		07	Sign Bit	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-06	Channel 2 Input Data High 7 bits	
		07	Sign Bit	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-06	Channel 3 Input Data High 7 bits	
		07	Sign Bit	0
8	R	00-07	Reserved	0
9	R	00-07	Reserved	0

A.3.31. ST-3624 (4-voltage analog input, 0~5V, 12bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-03	Channel 0 Input Data High 4 bits	
		04-07	not used	0
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-03	Channel 1 Input Data High 4 bits	
		04-07	not used	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-03	Channel 2 Input Data High 4 bits	
		04-07	not used	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-03	Channel 3 Input Data High 4 bits	
		04-07	not used	0
8	R	00-07	Reserved	0
9	R	00-07	Reserved	0

A.3.32. ST-3644 (4-voltage analog input, 0~5V, 14bit)

- Memory Register length: 10 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-05	Channel 0 Input Data High 6 bits	
		06, 07	not used	0
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-05	Channel 1 Input Data High 6 bits	
		06, 07	not used	0
4	R	00-07	Channel 2 Input Data Low 8 bits	
5	R	00-05	Channel 2 Input Data High 6 bits	
		06, 07	not used	0
6	R	00-07	Channel 3 Input Data Low 8 bits	
7	R	00-05	Channel 3 Input Data High 6 bits	
		06, 07	not used	0
8	R	00-07	Reserved	0
9	R	00-07	Reserved	0

A.3.33. ST-3702 (2- RTD/Resistance input)

- Memory Register length: 8 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-06	Channel 0 Input Data High 7 bits	
		07	Sign Bit	
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-06	Channel 1 Input Data High 7 bits	
		07	Sign Bit	
4	R/W	00-07	Sensor Type (same as A.3.31)	0
5	R/W	00-07	Temperature Type (same as A.3.31)	0
6	R	00, 01	Alarm Status Bit for individual channels - Bit 00 corresponds to input channel 0, bit 01 corresponds to input channel 1. When set(1), the input signal is below the input channel's minimum range or above the input channel's maximum range. And Input Data will be 0x8000(-32678)	
		02-07	Reserved	0
7	R	00-07	Reserved	

* Offset 4,5: All values are not stored in Adapter's EEPROM.

A.3.34. ST-3802 (2- Thermocouple/mV input)

- Memory Register length: 12 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Input Data Low 8 bits	
1	R	00-06	Channel 0 Input Data High 7 bits	
		07	Sign Bit	
2	R	00-07	Channel 1 Input Data Low 8 bits	
3	R	00-06	Channel 1 Input Data High 7 bits	
		07	Sign Bit	
4	R/W	00-07	Sensor Type (same as A.3.32)	0
5	R/W	00-07	Temperature Type (same as A.3.32)	0
6	R	00, 01	Alarm Status Bit for individual channels - Bit 00 corresponds to input channel 0, bit 01 corresponds to input channel 1. When set(1), the input signal is below the input channel's minimum range or above the input channel's maximum range. And Input Data will be 0x8000(-32678)	
		02-07	Reserved	0
7	R	00, 01	Burn-Out Bit for individual channels - Bit 00 corresponds to input channel 0, bit 01 corresponds to input channel 1. When set(1), the input channel is burn-out. And Input Data will be 0x8000(-32678)	
		02-07	Reserved	0
8	R	00-07	Cold Junction Low 8 bits	
9	R	00-07	Cold Junction High 8 bits	
10	R/W	00-07	Cold Junction Offset Low 8 bits	
11	R/W	00-07	Cold Junction Offset High 8 bits	

* Offset 4,5,10,11: All values are not stored in Adapter's EEPROM.

A.3.35. ST-4112 (2-current analog output, 0~20mA, 12bit)

- Memory Register length: 12 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Output Data Low 8 bits	0
1	R	00-03	Channel 0 Output Data High 4 bits	0
		04-07	not used	0
2	R	00-07	Channel 1 Output Data Low 8 bits	0
3	R	00-03	Channel 1 Output Data High 4 bits	0
		04-07	not used	0
4	R	00-07	Reserved	0
5	R	00-07	Reserved	0
6	R/W	00-07	Fault Action (Same as A.3.35)	0
7	R/W	00-07	Reserved	0
8	R/W	00-07	Channel 0 Fault Value Low Byte (Same as A.3.35)	0
9	R/W	00-07	Channel 0 Fault Value High Byte (Same as A.3.35)	0
10	R/W	00-07	Channel 1 Fault Value Low Byte (Same as A.3.35)	0
11	R/W	00-07	Channel 1 Fault Value High Byte (Same as A.3.35)	0

* Offset 6-11: All values are not stored in Adapter's EEPROM.

A.3.36. ST-4212 (2-current analog output, 4~20mA, 12bit)

- Memory Register length: 12 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Output Data Low 8 bits	0
1	R	00-03	Channel 0 Output Data High 4 bits	0
		04-07	not used	0
2	R	00-07	Channel 1 Output Data Low 8 bits	0
3	R	00-03	Channel 1 Output Data High 4 bits	0
		04-07	not used	0
4	R	00-07	Reserved	0
5	R	00-07	Reserved	0
6	R/W	00-07	Fault Action (Same as A.3.35)	0
7	R/W	00-07	Reserved	0
8	R/W	00-07	Channel 0 Fault Value Low Byte (Same as A.3.35)	0
9	R/W	00-07	Channel 0 Fault Value High Byte (Same as A.3.35)	0
10	R/W	00-07	Channel 1 Fault Value Low Byte (Same as A.3.35)	0
11	R/W	00-07	Channel 1 Fault Value High Byte (Same as A.3.35)	0

* Offset 6-11: All values are not stored in Adapter's EEPROM.

A.3.37. ST-4422 (2-voltage analog output, 0~10Vdc, 12bit)

- Memory Register length: 12 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Output Data Low 8 bits	0
1	R	00-03	Channel 0 Output Data High 4 bits	0
		04-07	not used	0
2	R	00-07	Channel 1 Output Data Low 8 bits	0
3	R	00-03	Channel 1 Output Data High 4 bits	0
		04-07	not used	0
4	R	00-07	Reserved	0
5	R	00-07	Reserved	0
6	R/W	00-07	Fault Action (Same as A.3.35)	0
7	R/W	00-07	Reserved	0
8	R/W	00-07	Channel 0 Fault Value Low Byte (Same as A.3.35)	0
9	R/W	00-07	Channel 0 Fault Value High Byte (Same as A.3.35)	0
10	R/W	00-07	Channel 1 Fault Value Low Byte (Same as A.3.35)	0
11	R/W	00-07	Channel 1 Fault Value High Byte (Same as A.3.35)	0

* Offset 6-11: All values are not stored in Adapter's EEPROM.

A.3.38. ST-4522 (2-voltage analog output, -10~10Vdc, 12bit)

- Memory Register length: 12 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Output Data Low 8 bits	0
1	R	00-03	Channel 0 Output Data High 4 bits	0
		04-07	not used	0
2	R	00-07	Channel 1 Output Data Low 8 bits	0
3	R	00-03	Channel 1 Output Data High 4 bits	0
		04-07	not used	0
4	R	00-07	Reserved	0
5	R	00-07	Reserved	0
6	R/W	00-07	Fault Action (Same as A.3.35)	0
7	R/W	00-07	Reserved	0
8	R/W	00-07	Channel 0 Fault Value Low Byte (Same as A.3.35)	0
9	R/W	00-07	Channel 0 Fault Value High Byte (Same as A.3.35)	0
10	R/W	00-07	Channel 1 Fault Value Low Byte (Same as A.3.35)	0
11	R/W	00-07	Channel 1 Fault Value High Byte (Same as A.3.35)	0

* Offset 6-11: All values are not stored in Adapter's EEPROM.

A.3.39. ST-4622 (2-voltage analog output, 0~5Vdc, 12bit)

- Memory Register length: 12 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Channel 0 Output Data Low 8 bits	0
1	R	00-03	Channel 0 Output Data High 4 bits	0
		04-07	not used	0
2	R	00-07	Channel 1 Output Data Low 8 bits	0
3	R	00-03	Channel 1 Output Data High 4 bits	0
		04-07	not used	0
4	R	00-07	Reserved	0
5	R	00-07	Reserved	0
6	R/W	00-07	Fault Action (Same as A.3.35)	0
7	R/W	00-07	Reserved	0
8	R/W	00-07	Channel 0 Fault Value Low Byte (Same as A.3.35)	0
9	R/W	00-07	Channel 0 Fault Value High Byte (Same as A.3.35)	0
10	R/W	00-07	Channel 1 Fault Value Low Byte (Same as A.3.35)	0
11	R/W	00-07	Channel 1 Fault Value High Byte (Same as A.3.35)	0

* Offset 6-11: All values are not stored in Adapter's EEPROM.

A.3.40. ST-5101 (1 Channel High Speed Counter 5Vdc)

A.3.41. ST-5111 (1 Channel High Speed Counter 24Vdc)

- Memory Register length: 24 bytes
- Memory Register:

Offset	Access	Decimal Bit	Description	Default Value
0	R	00-07	Current count value Low byte	0
1	R	00-07	Current count value Middle byte	0
2	R	00-07	Current count value High byte	0
3	R	00-07	Always 0	0
4	R	00-07	Status Low (compared flags)	0
5	R	00-07	Status High (same as LED display)	0
6	R	00-07	Output Terminal (OT) Control	0
7	R	00-07	SSR(Special Selection Register)	0
8	R/W	00-07	Gate Function/Counter Mode (Same as A.3.36)	0
9	R/W	00-07	Gate Sampling Time/Input Filter (Same as A.3.36)	0
10	R/W	00-07	Don't care	0
11	R/W	00-07	Don't care	0
12	R	00-07	Stored count value Low byte	0
13	R	00-07	Stored count value Middle byte	0
14	R	00-07	Stored count value High byte	0
15	R	00-07	Always 0	0
16	R/W	00-07	Initial Counter Value Low byte (Initial counter or PWM Frequency value)	0
17	R/W	00-07	Initial Counter Value Middle byte (Initial counter or PWM Frequency value)	0

18	R/W	00-07	Initial count value High byte (Initial counter or PWM Frequency value)	0
19	R/W	00-07	Always 0	0
20	R/W	00-07	Compare count value Low byte	0
21	R/W	00-07	Compare count value Middle byte	0
22	R/W	00-07	Compare count value High byte	0
23	R/W	00-07	Always 0	0

* Offset 8-9: All values are not stored in Adapter's EEPROM.