


E1000-Serie Mode-Schalter

Für die die Einstellung des Betriebsmodus der E1000-Serie Bediengeräte, befinden sich auf der Rückseite der Geräte, unter einer aufklappbaren Plastikabdeckung 4 DIP-Schalter.

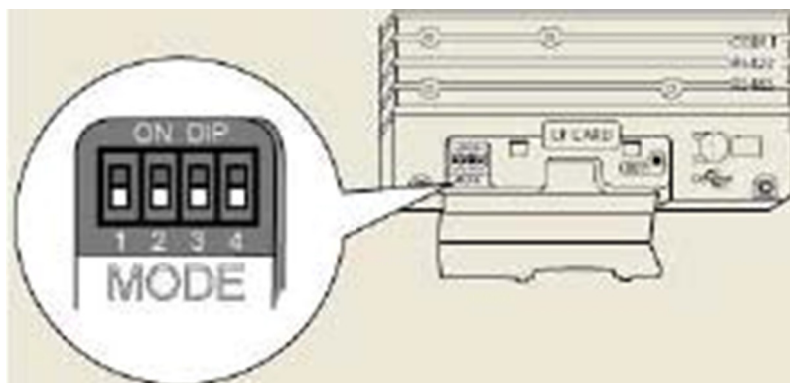

Vorgehensweise um den gewünschten Betriebsmodus einzustellen:

- Ausschalten der Versorgungsspannung des Bediengerätes
- Einstellen der Mode-Schalter auf den gewünschten Betriebsmodus
- Einschalten der Versorgungsspannung des Bediengerätes

Einstellbare Betriebsmodi:

(1=ON, 0=OFF)

MODE 1234	Description
0000	Run mode, normal operation.
0010	System Restore, resets the file system and registry & re-installs the System Program. Restores the operator terminal to factory settings.
0100	Image Load mode. allows upgrading of the complete software package in the operator terminal. Note: All files including the file system in the operator terminal will be deleted when upgrading with Image Loader.
1000	User Menu mode, the user menu for the system program is shown. Allows the user to set IP configuration, erase the project and calibrate the touch screen.
1110	Self-test.