



Date	Description	Revision
2014-03-14	First edition	1.0
2020-05-07	Updated template, cable specification	1.1



View from front

Color	Signal name	Pin no. J1
Screen		Housing
Brown	P+	1
White	P+	2
Blue	P-	3
Black	(OptioNs)	4
Grey	P-	5

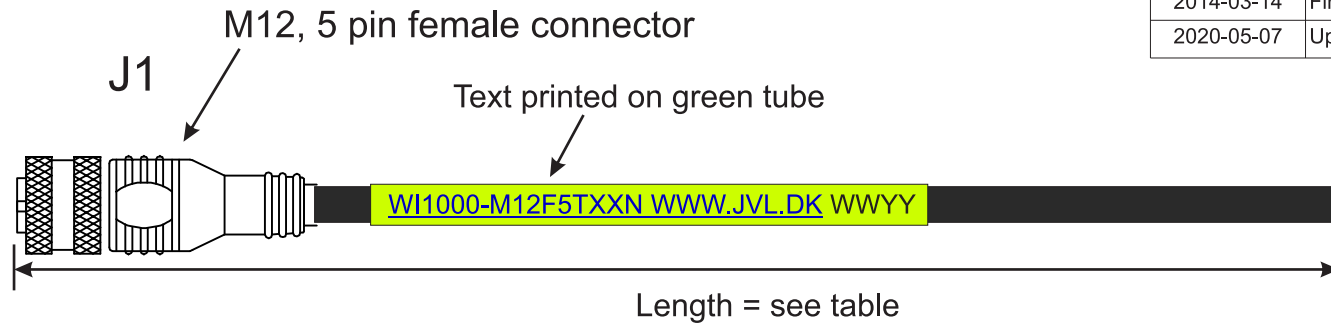



Part no.	Length
WI1000-M12F5T1.2N	1.2 m
WI1000-M12F5T02N	2 m
WI1000-M12F5T05N	5 m
WI1000-M12F5T10N	10 m
WI1000-M12F5T20N	20 m

**Cable Specification:**

UL Style 2464  
 5x22AWG  
 Shield  
 BLACK PVC JACKET OD 5.5MM  
 300V  
 Flame retardent class: VW-1(UL1581)

**Cable Marking:**

UL AWM 2464 22AWG VW-1 80°C 300V E343967  
 CUL AWM 22AWG I/II A FT1 80°C 300V +LF+

		JVL A/S Bregnerødvej 127 DK-3460 Birkerød Tel: +45 4582 4440 Email: jvl@jvl.dk	<b>A4</b>	File name: WI1000-M12F5TxxxN.cdr Part no.		
				<b>WI1000-M12F5TxxN</b>		
	Sign+vv	Date	Unit	mm	Tolerances	Description Shielded Power Cable M12 5 pin female 0°
Drw	JVA + 11	2020-05-07	Scale	--	Unless Specified	
App	MVJ + 11	2020-05-07			Linear	
ERP	JVA + 11	2020-05-07			Angles	