

DESCRIPTION						MOUNTING HOLE			BUSHINGS		
MICRO P/N	UL/CSA DESCRIPTION	CROSS SECTION	CABLE SIZE	CABLE TYPE	GAUGE (AWG)	STRAP TYPE	DIAMETER A	FLATS B	MAX PANEL TH C	LENGTH D	WIDTH E
23MP04K10	MP4K1	FLAT	.150 X .400 (3,8 X 10,1)	SPT-2	18/3	Y	.500 (12,7)	.460 (11,7)	.095 (2,4)	.495 (12,6)	.565 (14,4)
			.160 X .300 (4,1 X 7,6)	HPN	16/2						
			.160 X .300 (4,1 X 7,6)	SPT-2	16/2						
			.150 X .280 (3,8 X 7,1)	HPN	18/2						
			.150 X .280 (3,8 X 7,1)	SPT-2	18/2						

D

D

C





C

B

B

A

A

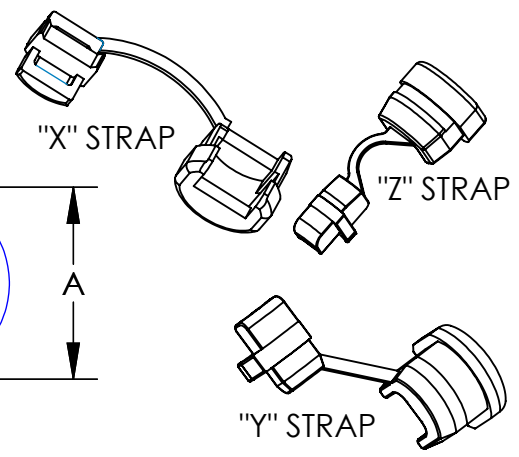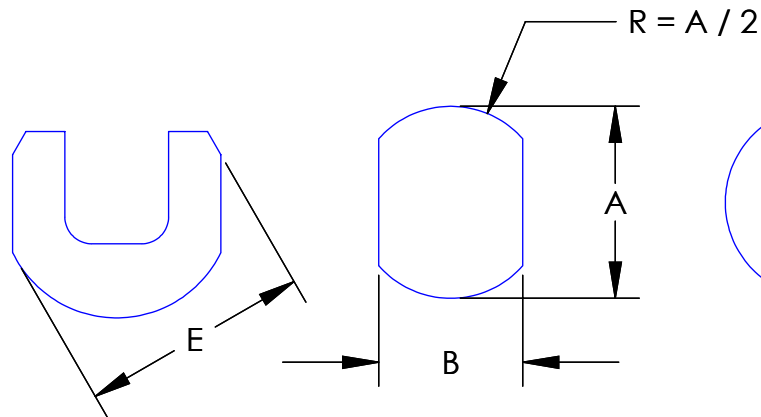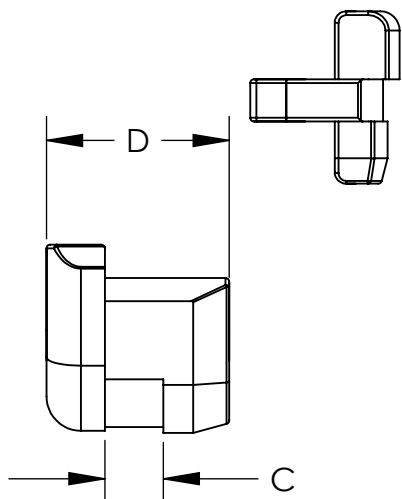

TOLERANCES UNLESS NOTED

- ±.005 ON DIMENSIONS THRU .625
- ±.008 ON DIMENSIONS .626 THRU 1.000
- ±.010 ON DIMENSIONS 1.001 THRU 1.500
- ±.015 ON DIMENSIONS LARGER THAN 1.500
- ±.015 ON FRACTIONAL DIMENSIONS

ENGINEERING APPROVED DRAWING
RELEASE LEVEL DATE

REV.	WAS	BY	DATE

PRINT 4 OF 16
PROPERTY OF
MICRO PLASTICS INC.

CATALOG PRINT
STRAIN RELIEF
JOB N/A
CUSTOMER P/N N/A
MICRO P/N AS NOTED
DWG 23MP_ FILE SERVER\ENG

MATERIAL: HEAT STABILIZED NYLON BLACK
DATE: 03/26/03
SCALE: NONE
TA

8 7 6 5 4 3 2 1