

Vydyne® ECO315

polyamide 66/6 copolymer



Vydyne ECO315 is a non-halogenated, unfilled, flame-retardant PA66/6 copolymer with excellent toughness and ductility. It is lubricated for machine feed and easy mold release and has an


Underwriters Laboratories UL 94 flammability classification of V-0 at 0.4 mm (0.016") thick.

General				
Material Status	• Commercial: Active			
Availability	• Asia Pacific	• Europe	• North America	
Additive	• Flame Retardant	• Lubricant		
Features	• Crack Resistant • Ductile • Flame Retardant	• Good Mold Release • Good Toughness • Halogen Free	• High Elongation • Low Density • Lubricated	
Uses	• Appliances • Automotive Electronics • Bobbins • Connectors • Electrical Housing	• Electrical Parts • Electrical/Electronic Applications • Fasteners • Industrial Applications • Lighting Applications	• Living Hinges • Printed Circuit Boards • Switches	
UL File Number	• E70062			
Appearance	• Natural Color			
Forms	• Pellets			
Processing Method	• Injection Molding			
Multi-Point Data	• Isothermal Stress vs. Strain (ISO 11403-1)			
Physical	Dry	Conditioned	Unit	Test Method
Density	1.16	--	g/cm ³	ISO 1183
Molding Shrinkage				ISO 294-4
Across Flow : 23°C, 2.00 mm	1.4	--	%	
Flow : 23°C, 2.00 mm	1.2	--	%	
Water Absorption (23°C, 24 hr)	0.80	--	%	ISO 62
Water Absorption (Equilibrium, 23°C, 50% RH)	2.3	--	%	ISO 62
Mechanical	Dry	Conditioned	Unit	Test Method
Tensile Modulus (23°C)	5000	3500	MPa	ISO 527-2
Tensile Stress (Yield, 23°C)	75.0	52.0	MPa	ISO 527-2
Tensile Strain (Yield, 23°C)	5.5	20	%	ISO 527-2
Tensile Strain (Break, 23°C)	25	30	%	ISO 527-2
Flexural Modulus (23°C)	3200	1560	MPa	ISO 178
Flexural Strength (23°C)	92.0	45.0	MPa	ISO 178
Poisson's Ratio	0.40	--		ISO 527-2

Impact	Dry	Conditioned	Unit	Test Method
Charpy Notched Impact Strength				ISO 179/1eA
-30°C	5.4	--	kJ/m ²	
23°C	5.4	--	kJ/m ²	
Charpy Unnotched Impact Strength				ISO 179/1eU
-30°C	No Break	--		
23°C	No Break	--		
Notched Izod Impact Strength (23°C)	6.0	--	kJ/m ²	ISO 180
Thermal	Dry	Conditioned	Unit	Test Method
Heat Deflection Temperature				ISO 75-2/B
0.45 MPa, Unannealed	225	--	°C	
Heat Deflection Temperature				ISO 75-2/A
1.8 MPa, Unannealed	65.0	--	°C	
Melting Temperature	244	--	°C	ISO 11357-3
CLTE - Flow (23 to 55°C, 2.00 mm)	1.1E-4	--	cm/cm/°C	ISO 11359-2
CLTE - Transverse (23 to 55°C, 2.00 mm)	1.1E-4	--	cm/cm/°C	ISO 11359-2
RTI Elec				UL 746
0.40 mm	130	--	°C	
0.75 mm	130	--	°C	
1.5 mm	130	--	°C	
3.0 mm	130	--	°C	
RTI Imp				UL 746
0.40 mm	65.0	--	°C	
0.75 mm	65.0	--	°C	
1.5 mm	85.0	--	°C	
3.0 mm	85.0	--	°C	
RTI Str				UL 746
0.40 mm	100	--	°C	
0.75 mm	100	--	°C	
1.5 mm	100	--	°C	
3.0 mm	110	--	°C	

Electrical	Dry	Conditioned	Unit	Test Method
Volume Resistivity (0.750 mm)	1.0E+11	--	ohms-cm	IEC 60093
Dielectric Strength (1.00 mm)	13	--	kV/mm	IEC 60243
Arc Resistance (3.00 mm)	PLC 5	--		ASTM D495
Comparative Tracking Index (3.00 mm)	600	--	V	IEC 60112
High Amp Arc Ignition (HAI)				UL 746
0.40 mm	PLC 0	--		
0.75 mm	PLC 0	--		
1.5 mm	PLC 0	--		
3.0 mm	PLC 0	--		
High Voltage Arc Tracking Rate (HVTR)	PLC 1	--		UL 746
Hot-wire Ignition (HWI)				UL 746
0.40 mm	PLC 4	--		
0.75 mm	PLC 4	--		
1.5 mm	PLC 4	--		
3.0 mm	PLC 3	--		
Flammability	Dry	Conditioned	Unit	Test Method
Flame Rating				UL 94
0.40 mm	V-0	--		
0.75 mm	V-0	--		
1.5 mm	V-0	--		
3.0 mm	V-0	--		
Glow Wire Flammability Index				IEC 60695-2-12
0.40 mm	960	--	°C	
0.75 mm	960	--	°C	
1.5 mm	960	--	°C	
3.0 mm	960	--	°C	
Glow Wire Ignition Temperature				IEC 60695-2-13
0.40 mm	875	--	°C	
0.75 mm	875	--	°C	
1.5 mm	775	--	°C	
3.0 mm	725	--	°C	
Oxygen Index	29	--	%	ISO 4589-2

Isothermal Stress vs. Strain (ISO 11403-1)

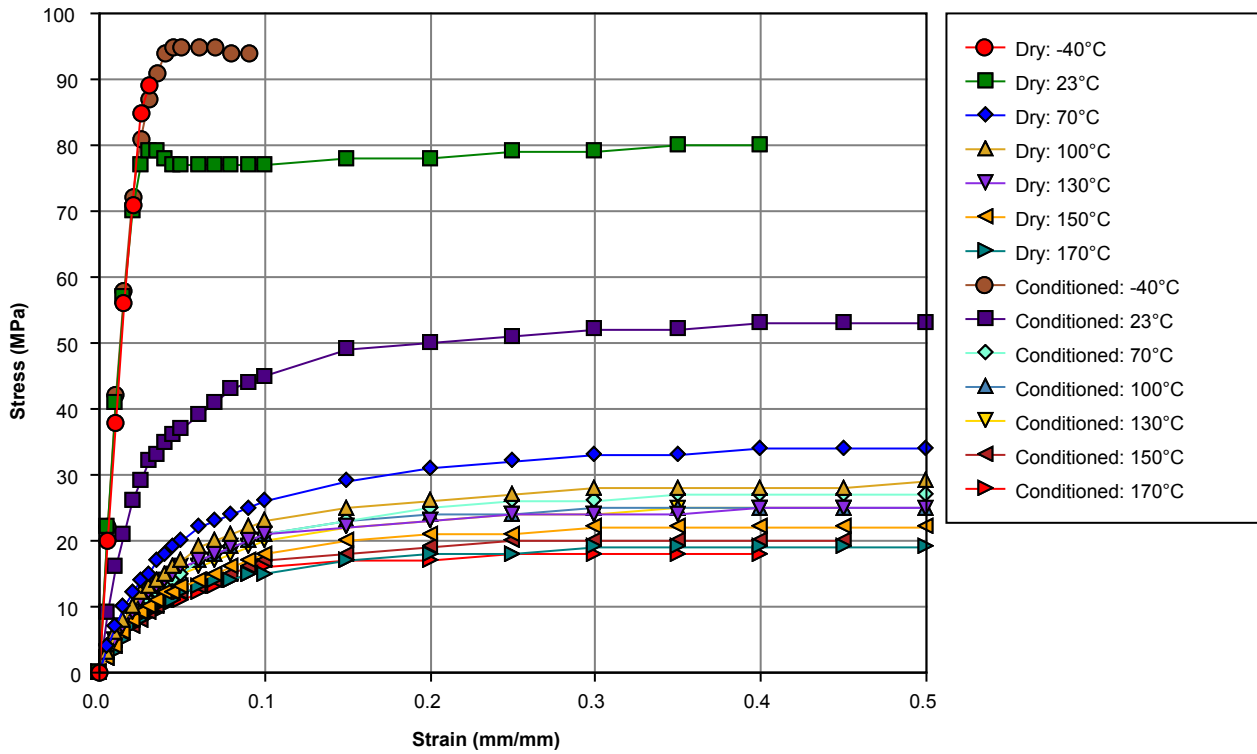

Injection	Dry Unit
Drying Temperature	80 °C
Drying Time	4.0 hr
Suggested Max Regrind	50 %
Rear Temperature	240 to 270 °C
Middle Temperature	240 to 270 °C
Front Temperature	240 to 270 °C
Nozzle Temperature	240 to 270 °C
Processing (Melt) Temp	250 to 270 °C
Mold Temperature	65 to 95 °C

Notes

Typical properties: these are not to be construed as specifications.

¹ Typical properties: these are not to be construed as specifications.



North America

+1 888 927 2363

Europe

+32 10 608 600

Asia

+86 21 6340 3300

Disclaimer of Warranty and Liability

NOTICE: Although the information and recommendations set forth herein (hereinafter "information") are presented in good faith and believed to be correct as of the date hereof, Ascend Performance Materials Operations LLC makes no representations or warranties as to the completeness or accuracy thereof.

Information is supplied upon the condition that the persons receiving same will make their own determination as to its suitability for their purposes prior to use. In no event will Ascend Performance Materials Operations LLC be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information or the products to which information refers. Nothing contained herein is to be construed as a recommendation to use any product, equipment or formulation in conflict with any patent, and Ascend Performance Materials Operations LLC makes no representation or warranty, express or implied, that use thereof will not infringe any patent. No representations or warranties, either express or implied, of merchantability, fitness for a particular purpose or of any other nature are made hereunder with respect to information or the product to which information refers.