

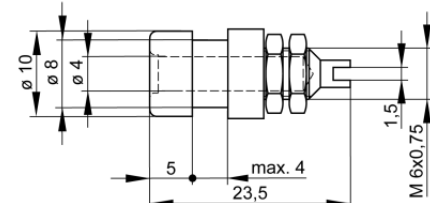


Sockets

BIL 30 Au



Product	BIL 30 Au
description	Socket with insulated head and ring for installation in equipment chassis and switchpanels up to 4 mm wall thickness. 4 mm diameter gold-plated brass socket, with solder connection.
article-no. / *colour	9301667xx  Au
drawing	
technical data	
connection	M6 thread, solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	32 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +85 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

4 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ Other circuits that are not directly connected to mains



stand: 30.07.2018