
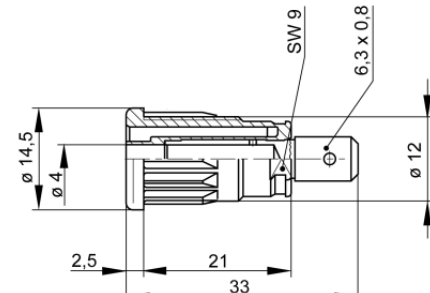


## Sockets

### SEP 2620 F6,3



<b>Product</b>	<b>SEP 2620 F6,3</b>
description	Safety press-in socket, 4 mm diameter, contact-protected, with 6.3 x 0.8 tab connector complying with DIN 46 244, gold-plated brass. For rapid installation into switchpanels with wall thicknesses between 1-10 mm. Installation hole: $\varnothing 12.2 \pm 0.1$ mm Entry chamfer: 0.5 x 45°
operating instruction	BA454
article-no. / *colour	9723621xx   00 black    01 red    02 blue    03 yellow    04 green    88 yellow green <span style="border: 1px solid black; padding: 2px;">Au</span>
<b>drawing</b>	
<b>technical data</b>	
connection	flat connector 6.3 x 0.8 mm
rated voltage <sup>(1)</sup>	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current <sup>(1)</sup> (consider derating curve)	32 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 <sup>(2)</sup>	-40 °C to +80 °C

4 mm safety system

inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

stand: 20.07.2018