
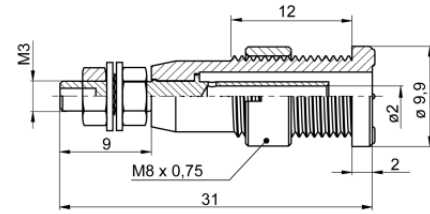


## Sockets

### MSEB 2600 G M3 Au



<b>Product</b>	<b>MSEB 2600 G M3 Au</b>
description	Miniature - safety built-in socket, 2mm diameter, touch protected, M3 threaded connection and soldering hole, gold-plated brass. For installation into switch- panels and equipment chassis with a wall thickness up to 8mm. Installation hole: 8mm diameter
operating instruction	BA254
article-no. / *colour	9754547xx  00 black   01 red   02 blue   03 yellow   04 green   05 brown   06 gray   07 white   09 violet <span style="border: 1px solid black; padding: 2px;">Au</span>
<b>drawing</b>	
<b>technical data</b>	
connection	M3 thread, solder connection
rated voltage <sup>(1)</sup>	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current <sup>(1)</sup> (consider derating curve)	10 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 <sup>(2)</sup>	-25 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges  
stand: 10.01.2019