
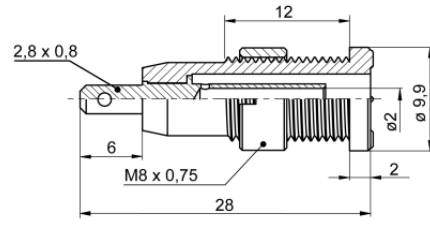


Sockets

MSEB 2610 F 2,8 Au



Product	MSEB 2610 F 2,8 Au
description	Miniature safety built-in socket, 2mm diameter, gold-plated brass. Flat push-on Connection 2.8x0.8mm complying with DIN 46244. For installation into switch-panels and equipment Chassis till 8mm wall thickness. Installation hole: 8mm diameter
operating instruction	BA254
article-no. / *colour	9754557xx  Au
drawing	
technical data	
connection	flat connector 2.8 x 0.8 mm
rated voltage ⁽¹⁾	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current ⁽¹⁾ (consider derating curve)	10 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

2 mm safety system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges
stand: 10.01.2019