


## Plugs

### VST 20

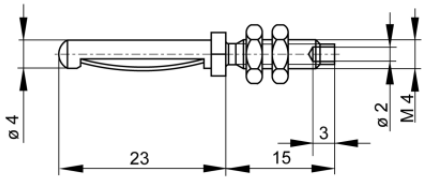

|   |  |
|---|--|
| <b>Product</b>  | <b>VST 20</b>  |
| description   | Fully mating connector as built-in pin, solder connection up to maximum cable cross-section of 2 mm <sup>2</sup> . Nickel-plated brass contact material. |
| Articlenummer   | 930050000 <span style="float: right; border: 1px solid black; padding: 2px;">Ni</span>   |
| <b>drawing</b>  |  |
|   |   |
| <b>technical data</b>                                     |  |
| connection  | M4 thread, solder connection   |
| rated voltage <sup>(1)</sup>                              | 30 VAC / 60 VDC  |
| measurement cat. acc. to IEC 61010                        | O <sup>(3)</sup>   |
| rated current <sup>(1)</sup><br>(consider derating curve) | 16 A   |
| material plug   | brass, nickel plated   |
| temperature range acc. To IEC61010 <sup>(2)</sup>         | -25 °C to +100 °C  |
| standard  | IEC 61010  |

4 mm system

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> Other circuits that are not directly connected to mains

stand: 30.07.2018