



## Plugs

### MST 201

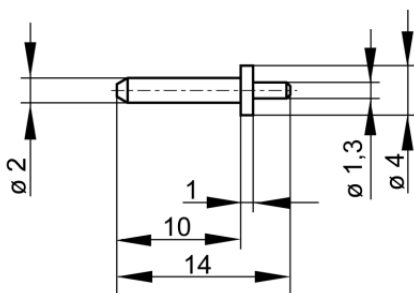

Product	MST 201
description	2 mm diameter miniature connector pin for soldering into printed boards. Connects with MKU 1 and MBU 2. This connector pin is used together with the MBU 2 socket in stacking printed boards. Connector pins are installed at a spacing pitch from 5 mm up.
Articlenummer	931338001 <span style="float: right; border: 1px solid black; padding: 2px;">Ni</span>
drawing	
	
technical data	
connection	solder connection
rated voltage <sup>(1)</sup>	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(3)</sup>
rated current <sup>(1)</sup> (consider derating curve)	6 A
material plug	brass, nickel plated
temperature range acc. To IEC61010 <sup>(2)</sup>	-20 °C to +60 °C
standard	IEC 61010

2 mm system

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> Other circuits that are not directly connected to mains

stand: 30.07.2018