
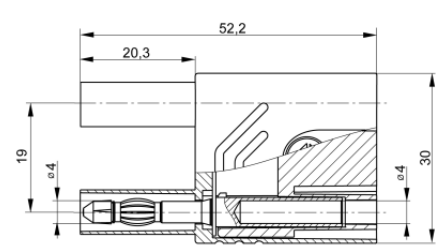


## Plugs

### KST S WS



Product	KST S WS
description	Touch protected shorting plug with caged spring and unsprung socket, with onward connection capability and shatter-proof insulated sleeve.
article-no. / *colour	9322001xx  <span style="border: 1px solid black; padding: 2px;">Ni</span>
drawing	
<b>technical data</b>	
connection	unsprung socket 4 mm
rated voltage <sup>(1)</sup>	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT II
rated current <sup>(1)</sup> (consider derating curve)	32 A
material plug	brass, nickel plated
housing material	PA
temperature range acc. To IEC61010 <sup>(2)</sup>	-15 °C to +70 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	V-2
standard	IEC 61010

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

stand: 07.08.2018