
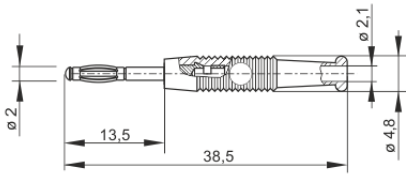


Plugs

MSTF 2



Product	MSTF 2
description	Spring-loaded 2 mm plug, for leads up to 0.5 mm ² and a maximum outer diameter of 2 mm, suitable to all unsprung 2 mm connections.
article-no. / *colour	9384201xx  Ni
drawing	
technical data	
connection	solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	6 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010 ⁽²⁾	-15 °C to +70 °C
standard	IEC 61010

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ Other circuits that are not directly connected to mains

stand: 31.08.2018