


BEK-A300-DIF

Diffusor
Diffusor
Diffuseur

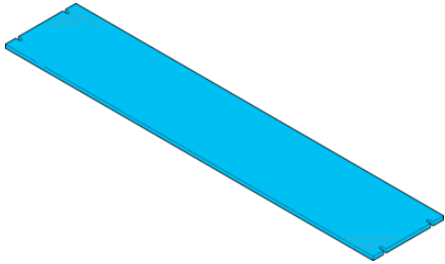

di-soric GmbH & Co. KG
Steinbeisstraße 6
DE-73660 Urbach
Germany
Tel: +49 (0) 7181/9879-0
info@di-soric.de · www.di-soric.com

208185



Technische Daten	Technical data	Caractéristiques techniques	+20°C, 24 V DC
Geeignet für	To be used for	Convient pour	Aufflichtbeleuchtungen BE-A300..., Aufflichtbeleuchtungen BEK-A300... / Barlights BE-A300..., Barlights BEK-A300... / Barres d'éclairage BE-A300..., Barres d'éclairage BEK-A300...
Abmessungen	Dimensions	Dimensions	60 x 313 x 3 mm
Material Filter	Material of filter	Matériau filtre	Fenster, PMMA, kratzfest beschichtet / Window, PMMA, hardcoated / Fenêtre, PMMA, revêtement résistant aux rayures
Besonderheiten	Characteristics	Particularités	Befestigungsmaterial inklusive / Mounting hardware included / Matériel de fixation inclus


Stand 18.08.21, Änderungen vorbehalten

As of 08/18/21, subject to change

État 18.08.21, sous réserve de modifications

BEK-A300-DIF

漫射体

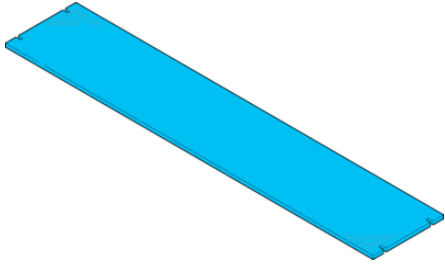

di-soric GmbH & Co. KG
 Steinbeisstraße 6
 DE-73660 Urbach
 Germany
 Tel: +49 (0) 7181/9879-0
 info@di-soric.de · www.di-soric.com

208185



技术数据

适合用于

尺寸

滤光片材料

特点

+20°C, 24 V DC

条形光源 BE-A300..., 条形光源 BEK-A300...

60 x 313 x 3 mm

窗口, PMMA, 防刮涂层

固定材料包括在内

版本 21.08.18, 保留变更权