

Digital Output Module

GT-2xxx User Manual



Version 1.00

2018 CREVIS Co.,Ltd

DOCUMENT CHANGE SUMMARY				
REV	PAGE	REMARKS	DATE	EDITOR
1.00	New Document		18/07/30	Rachel

Table of Contents

1. Important Notes	8
1.1. Safety Instruction	9
1.1.1. Symbols	9
1.1.2. Safety Notes	9
1.1.3. Certification	9
2. Digital Output Module List	10
3. Specification	11
3.1. GT-2318	11
3.1.1. Wiring Diagram	11
3.1.2. LED Indicator	12
3.1.3. Channel Status LED	12
3.1.4. Environment Specification	13
3.1.5. Specification	14
3.1.6. Mapping Data into the Image Table	15
3.1.7. Parameter Data	15
3.2. GT-2328	16
3.2.1. Wiring Diagram	16
3.2.2. LED Indicator	17
3.2.3. Channel Status LED	17
3.2.4. Environment Specification	18
3.2.5. Specification	19
3.2.6. Mapping Data into the Image Table	20
3.2.7. Parameter Data	20
3.3. GT-221F	21
3.3.1. Wiring Diagram	21
3.3.2. LED Indicator	22
3.3.3. Channel Status LED	22
3.3.4. Environment Specification	23
3.3.5. Specification	24
3.3.6. Mapping Data into the Image Table	25
3.3.7. Parameter Data	25

3.4. GT-222F	26
3.4.1. Wiring Diagram	26
3.4.2. LED Indicator	27
3.4.3. Channel Status LED	27
3.4.4. Environment Specification	28
3.4.5. Specification	29
3.4.6. Mapping Data into the Image Table	30
3.4.7. Parameter Data	30
3.5. GT-225F	31
3.5.1. Wiring Diagram	31
3.5.2. LED Indicator	32
3.5.3. Channel Status LED	32
3.5.4. Environment Specification	33
3.5.5. Specification	34
3.5.6. Mapping Data into the Image Table	35
3.5.7. Parameter Data	35
3.6. GT-226F	36
3.6.1. Wiring Diagram	36
3.6.2. LED Indicator	37
3.6.3. Channel Status LED	37
3.6.4. Environment Specification	38
3.6.5. Specification	39
3.6.6. Mapping Data into the Image Table	40
3.6.7. Parameter Data	40
3.7. GT-22BA	41
3.7.1. Wiring Diagram	41
3.7.2. LED Indicator	42
3.7.3. Channel Status LED	42
3.7.4. Environment Specification	43
3.7.5. Specification	44
3.7.6. Mapping Data into the Image Table	45
3.7.7. Parameter Data	46

3.8. GT-22CA	47
3.8.1. Wiring Diagram	47
3.8.2. LED Indicator	48
3.8.3. Channel Status LED	48
3.8.4. Environment Specification	49
3.8.5. Specification	50
3.8.6. Mapping Data into the Image Table	51
3.8.7. Parameter Data	52
3.9. GT-2618	53
3.9.1. Wiring Diagram	53
3.9.2. LED Indicator	54
3.9.3. Channel Status LED	54
3.9.4. Environment Specification	55
3.9.5. Specification	56
3.9.6. Mapping Data into the Image Table	57
3.9.7. Parameter Data	57
3.10. GT-2628	58
3.10.1. Wiring Diagram	58
3.10.2. LED Indicator	59
3.10.3. Channel Status LED	59
3.10.4. Environment Specification	60
3.10.5. Specification	61
3.10.6. Mapping Data into the Image Table	62
3.10.7. Parameter Data	62
3.11. GT-2734	63
3.11.1. Wiring Diagram	63
3.11.2. LED Indicator	64
3.11.3. Channel Status LED	64
3.11.4. Environment Specification	65
3.11.5. Specification	66
3.11.6. Mapping Data into the Image Table	67
3.11.7. Parameter Data	67

3.12. GT-2744	68
3.12.1. Wiring Diagram	68
3.12.2. LED Indicator	69
3.12.3. Channel Status LED	69
3.12.4. Environment Specification	70
3.12.5. Specification	71
3.12.6. Mapping Data into the Image Table	72
3.12.7. Parameter Data	72
3.13. GT-2764	73
3.13.1. Wiring Diagram	73
3.13.2. LED Indicator	74
3.13.3. Channel Status LED	74
3.13.4. Environment Specification	75
3.13.5. Specification	76
3.13.6. Mapping Data into the Image Table	77
3.13.7. Parameter Data	77
3.14. GT-2784	78
3.14.1. Wiring Diagram	78
3.14.2. LED Indicator	79
3.14.3. Channel Status LED	79
3.14.4. Environment Specification	80
3.14.5. Specification	81
3.14.6. Mapping Data into the Image Table	82
3.14.7. Parameter Data	82
4. Dimension	83
4.1. GT-2xx4(RTB), GT-2xx8(RTB)	83
4.2. GT-2xxF(20P Connector)	84
4.3. GT-2xxA(40P Connector)	85
4.3. GT-2xxA(18RTB)	86
5. Mounting	87
5.1. I/O Inserting and Removing Devices	87
5.2. RTB (Removable Terminal Block)	88

6. GBus Pin Description..... 89

1. Important Notes

Solid state equipment has operational characteristics differing from those of electromechanical equipment. Safety Guidelines for the Application, Installation and Maintenance of Solid State Controls describes some important differences between solid state equipment and hard-wired electromechanical devices.

Because of this difference, and also because of the wide variety of uses for solid state equipment, all persons responsible for applying this equipment must satisfy themselves that each intended application of this equipment is acceptable.

In no event will CREVIS be responsible or liable for indirect or consequential damages resulting from the use or application of this equipment.

The examples and diagrams in this manual are included solely for illustrative purposes. Because of the many variables and requirements associated with any particular installation, CREVIS cannot assume responsibility or liability for actual use based on the examples and diagrams.

Warning!

- ✓ **If you don't follow the directions, it could cause a personal injury, damage to the equipment or explosion**
- Do not assemble the products and wire with power applied to the system. Else it may cause an electric arc, which can result into unexpected and potentially dangerous action by field devices. Arching is explosion risk in hazardous locations. Be sure that the area is non-hazardous or remove system power appropriately before assembling or wiring the modules.
- Do not touch any terminal blocks or IO modules when system is running. Else it may cause the unit to an electric shock or malfunction.
- Keep away from the strange metallic materials not related to the unit and wiring works should be controlled by the electric expert engineer. Else it may cause the unit to a fire, electric shock or malfunction.



Caution!

- ✓ **If you disobey the instructions, there may be possibility of personal injury, damage to equipment or explosion. Please follow below Instructions.**
- Check the rated voltage and terminal array before wiring. Avoid the circumstances over 50°C of temperature. Avoid placing it directly in the sunlight.
- Avoid the place under circumstances over 85% of humidity.
- Do not place Modules near by the inflammable material. Else it may cause a fire.
- Do not permit any vibration approaching it directly.
- Go through module specification carefully, ensure inputs, output connections are made with the specifications. Use standard cables for wiring.


- Use Product under pollution degree 2 environment.

1.1. Safety Instruction

1.1.1. Symbols

<p>DANGER</p> 	<p>Identifies information about practices or circumstances that can cause an explosion in a hazardous environment, which may lead to personal injury or death property damage, or economic loss.</p>
<p>IMPORTANT</p>	<p>Identifies information that is critical for successful application and understanding of the product</p>
<p>ATTENTION</p> 	<p>Identifies information about practices or circumstances that can lead to personal injury, property damage, or economic loss. Attentions help you to identity a hazard, avoid a hazard, and recognize the consequences</p>

1.1.2. Safety Notes

<p>DANGER</p> 	<p>The modules are equipped with electronic components that may be destroyed by electrostatic discharge. When handling the modules, ensure that the environment (persons, workplace and packing) is well grounded. Avoid touching conductive components, GBUS Pin.</p>
--	--

1.1.3. Certification

c-UL-us UL Listed Industrial Control Equipment, certified for U.S. and Canada

See UL File E235505

CE Certificate

EN 61000-6-2; Industrial Immunity

EN 61000-6-4; Industrial Emissions

Reach, RoHS (EU, CHINA)


2. Digital Output Module List

GT-Number	Description	ID	Production Status
GT-2318	Digital Output, 8 Points, Sink(Negative), 24VDC, 0.5A, 10 RTB	2318	Active
GT-2328	Digital Output, 8 Points, Source(Positive), 24VDC, 0.5A, 10 RTB	2328	Active
GT-221F	Digital Output, 16 Points, Sink(Negative), 24VDC, 0.3A, 20P Connector	221F	Active
GT-222F	Digital Output, 16 Points, Source(Positive), 24VDC, 0.3A, 20P Connector	222F	Active
GT-225F	DIGITAL OUTPUT 16POINTS, SINK, 18RTB	225F	Active
GT-226F	DIGITAL OUTPUT 16POINTS, SOURCE, 18RTB	226F	Active
GT-22BA	Digital Output, 32 Points, Sink(Negative), 24VDC, 0.3A, 40P Connector	22BA	Active
GT-22CA	Digital Output, 32 Points, Source(Positive), 24VDC, 0.3A, 40P Connector	22CA	Active
GT-2618	Digital Output, 8 Points, Sink(Negative), 24VDC, 2A, 10RTB	2618	Active
GT-2628	Digital Output, 8 Points, Source(Positive), 24VDC, 2A, 10RTB	2628	Active
GT-2734	Digital Output, 4 Points, MOS Relay(Solid State Relay), 240V (AC/DC), 0.5A, 10 RTB	2734	Active
GT-2744	Digital Output, 4 Points, Relay, 24VDC/ 220VAC, 2.0A, 10 RTB	2744	Active
GT-2764	Digital Output, 4 Points, MOS Relay(Solid State Relay), 24V (AC/DC), 2.0A, 10 RTB	2764	Active
GT-2784	Digital Output, 4 Points, MOS Relay(Solid State Relay), 110V(AC/DC), 1A, 10 RTB	2748	Active

3. Specification


3.1. GT-2318

3.1.1. Wiring Diagram

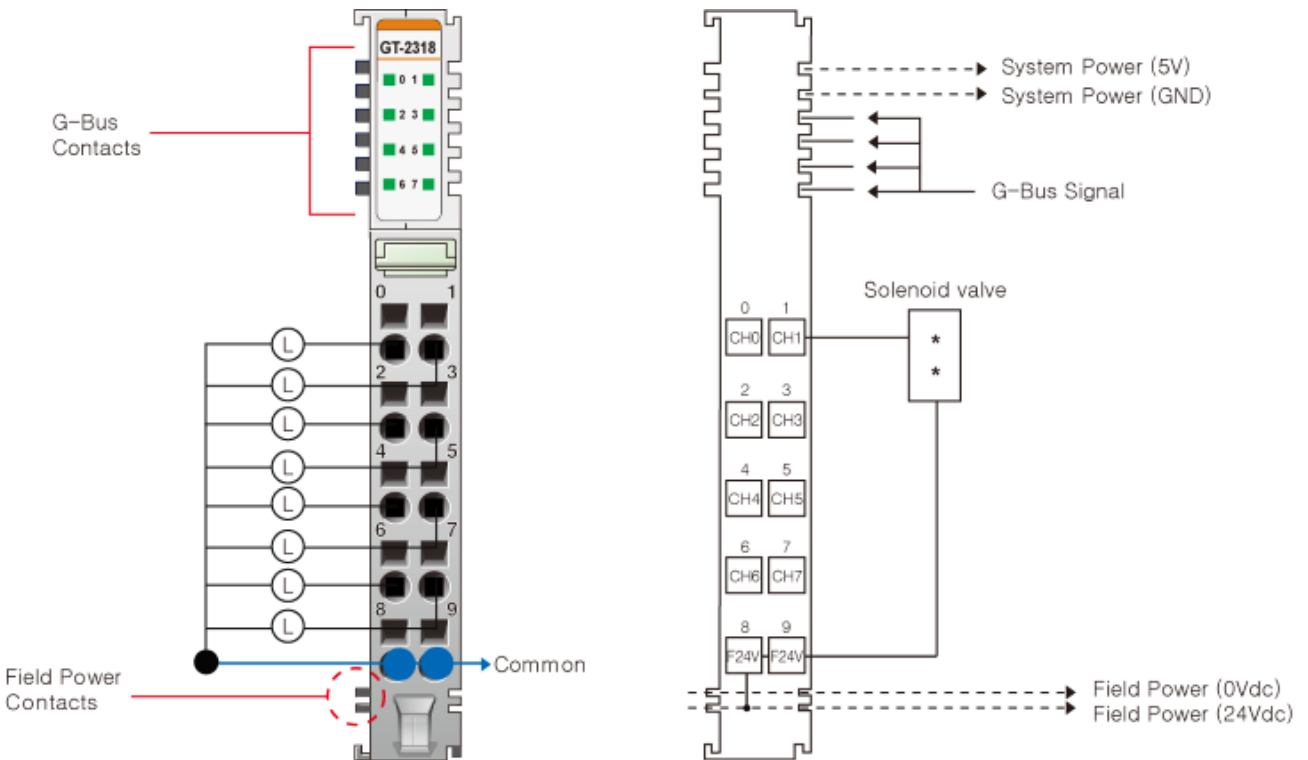

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	Output Channel 1	1
2	Output Channel 2	Output Channel 3	3
4	Output Channel 4	Output Channel 5	5
6	Output Channel 6	Output Channel 7	7
8	Common(FieldPower 24V)	Common(FieldPower 24V)	9

3.1.2. LED Indicator

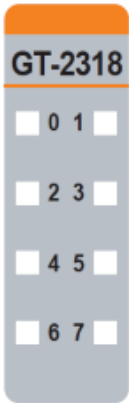

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green
4	Output Channel 4	Green
5	Output Channel 5	Green
6	Output Channel 6	Green
7	Output Channel 7	Green

3.1.3. Channel Status LED

Status	LED is	To indicate
Not Signal	Off	Normal Operation
On Signal	Green	Normal Operation

3.1.4. Environment Specification

Environmental specification	
Operating Temperature	-40°C~70°C
UL Temperature	-20°C~60°C
Storage Temperature	-40°C~85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN rail
General specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration 5 ~ 25Hz : ±1.6mm 25 ~ 300Hz : 4g Sweep Rate : 1 Oct/min, 20 cycles Random Vibration 10 ~ 40 Hz : 0.0125 g ² /Hz 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz 100 ~ 500 Hz : 0.002 g ² /Hz 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz Test time : 1hrs for each test
Industrial Emissions	EN61000-6-4/All : 2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available.
Product Certifications	CE, UL


3.1.5. Specification

Items	Specification
Output specification	
Outputs per module	8 Points, Sink type
Indicators(Logic side)	8 Green Output status
Output Voltage Range	Nominal 24Vdc, Min. 15Vdc to Max. 32Vdc
ON-state voltage drop	Max. 0.5Vdc @ 25°C, 70°C, -40°C
ON-State Min. Current	1mA per channel
OFF-State Leakage current	Max. 25uA
Output Signal Delay	OFF to ON : 0.3ms maximum ON to OFF : 0.3ms maximum
Output Current Rating	Max. 0.5A per channel / Max. 4A per unit
Protection	Over Current limit: Min. 3.5A@ 25°Cper each channels Thermal Shutdown : Min 3A@ 25°Cper each channels Short circuit protection
COMMON Type	8 points / Internal 2Com
General Specification	
Power dissipation	45mA maximum @ 5.0Vdc
Isolation	I/O to Logic : Isolation Field power : Non-isolation
Field Power	Supply voltage : 24Vdc nominal Voltage range : 15V to 32V Power dissipation: 5mA @24Vdc
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Weight	39g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.1.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0	D7	D6	D5	D4	D3	D2	D1	D0



- Output Module Data

D7	D6	D5	D4	D3	D2	D1	D0
----	----	----	----	----	----	----	----


3.1.7. Parameter Data

- Valid Parameter Length : 2 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Fault Action (ch0~ch7) 0:Fault value, 1:Hold last state							
Byte1	Fault Value (ch0~ch7) 0:Off, 1:On							


3.2. GT-2328

3.2.1. Wiring Diagram

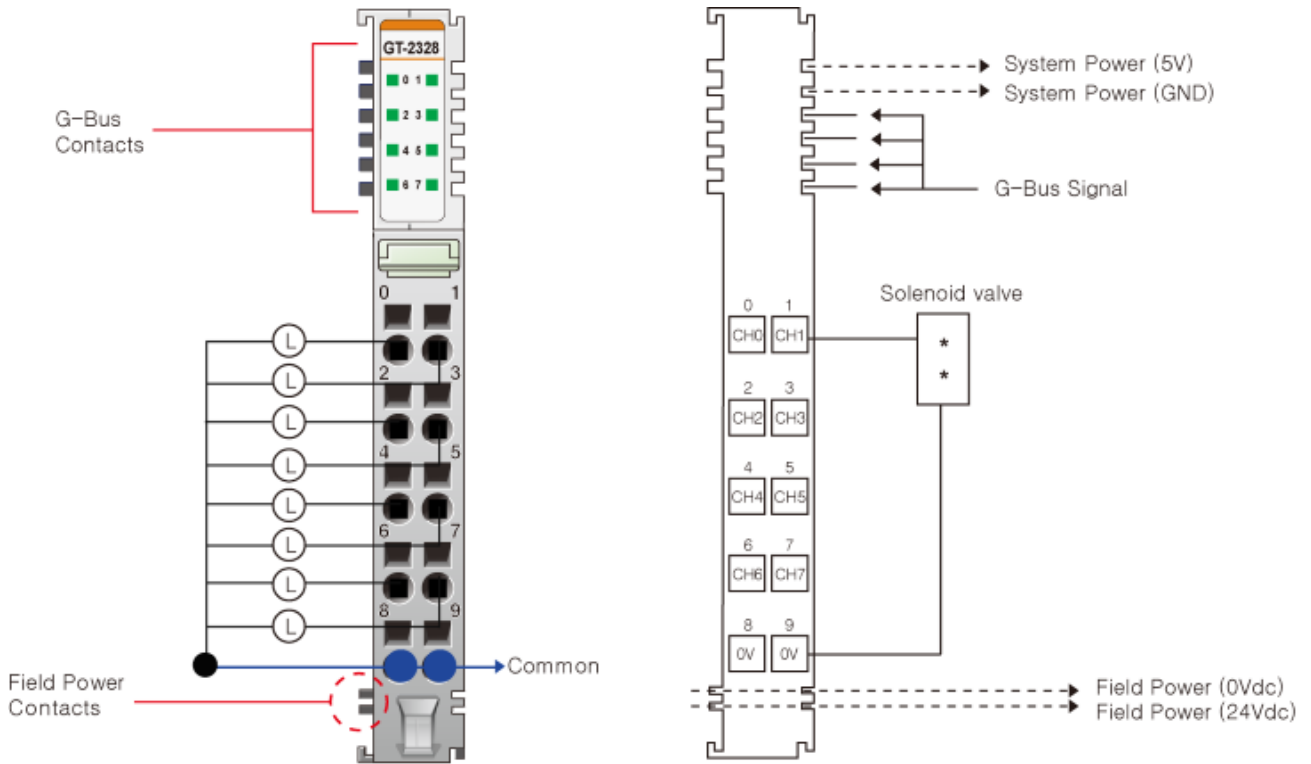

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel0	Output Channel1	1
2	Output Channel2	Output Channel3	3
4	Output Channel4	Output Channel5	5
6	Output Channel6	Output Channel7	7
8	Common (Field Power 0V)	Common (Field Power 0V)	9

3.2.2. LED Indicator

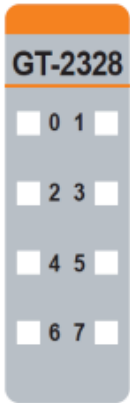

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green
4	Output Channel 4	Green
5	Output Channel 5	Green
6	Output Channel 6	Green
7	Output Channel 7	Green

3.2.3. Channel Status LED

Status	LED	To indicate
Not Signal	Off	Normal Operation
On Signal	Green	Normal Operation

3.2.4. Environment Specification

Environmental specification	
Operating Temperature	-40°C~70°C
UL Temperature	-20°C~60°C
Storage Temperature	-40°C~85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN rail
General specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration 10 ~ 40 Hz : 0.0125 g ² /Hz 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz Test time : 1hrs for each test
Industrial Emissions	EN 61000-6-4/A11 : 2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available.
Product Certifications	CE, UL


3.2.5. Specification

Items	Specification
Output Specification	
Output per module	8 Points Source type
Indicators (Logic side)	8 Green output state
Output Voltage Range	Nominal 24Vdc, Min. 15Vdc to Max. 32Vdc
ON-state voltage drop	Max. 0.5Vdc @ 25°C, 70°C, -40°C
Field Power OFF-state voltage	4.6Vdc @ 25°C
ON-State Min. Current	1mA per channel
OFF-State Leakage current	Max. 25uA
Output Signal Delay	OFF to ON : 0.3ms maximum ON to OFF : 0.3ms maximum
Output Current Rating	Max. 0.5A per channel / Max. 4A per unit
Protection	Over Current limit : Min 6.5A@ 25°C per each channels Thermal Shutdown : Min 4A@ 25°C per each channels Short circuit protection
COMMON Type	8 points / Internal 2Com
General specification	
Power dissipation	40mA maximum @ 5.0Vdc
Isolation	I/O to Logic : Isolation Field Power : Non-isolation
Field Power	Supply voltage : 24Vdc nominal Voltage range : 15 to 32Vdc Power dissipation: 10mA @ 24Vdc
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Weight	40g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.2.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0



- Output Module Data

D7	D6	D5	D4	D3	D2	D1	D0
----	----	----	----	----	----	----	----


3.2.7. Parameter Data

- Valid Parameter Length : 2 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	FaultAction (ch0~ch7) 0: Fault value, 1:Hold last state							
Byte1	Faultvalue (ch0~ch7) 0:Off, 1:On							


3.3. GT-221F

3.3.1. Wiring Diagram

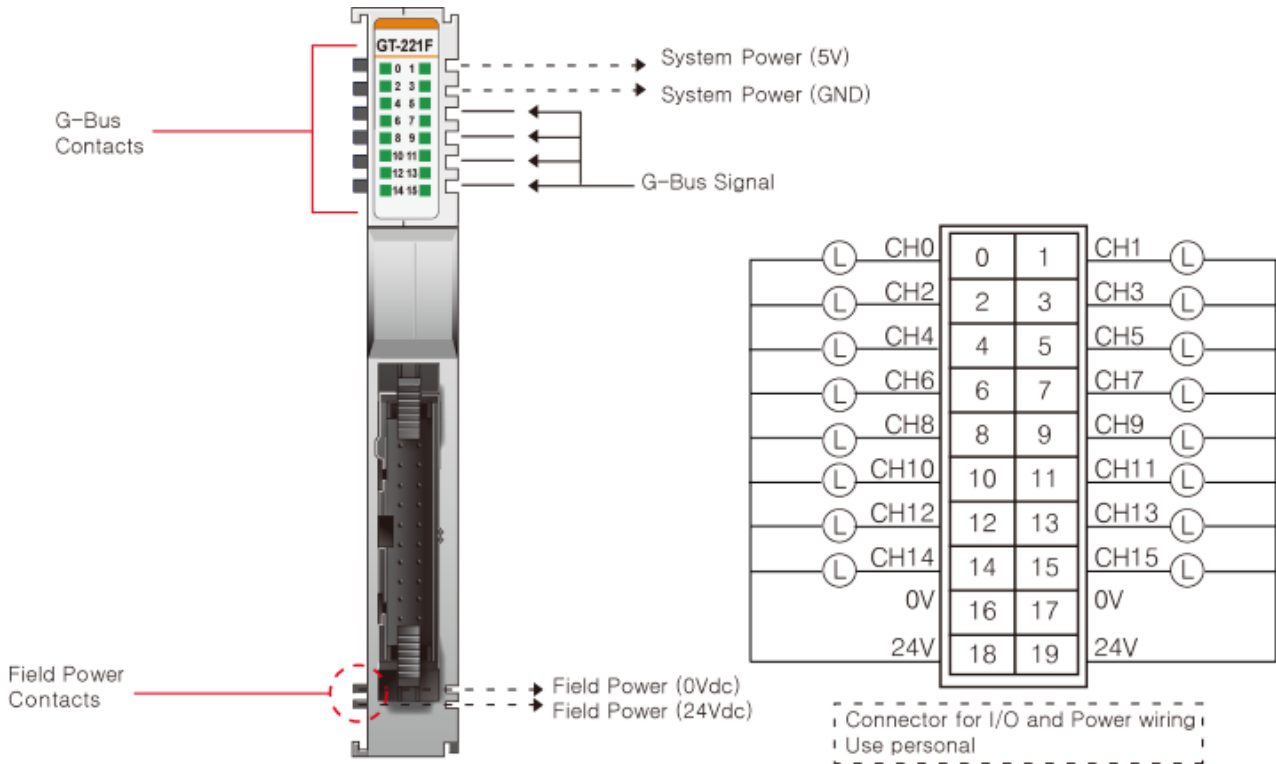

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	Output Channel 1	1
2	Output Channel 2	Output Channel 3	3
4	Output Channel 4	Output Channel 5	5
6	Output Channel 6	Output Channel 7	7
8	Output Channel 8	Output Channel 9	9
10	Output Channel 10	Output Channel 11	11
12	Output Channel 12	Output Channel 13	13
14	Output Channel 14	Output Channel 15	15
16	Field Power 0V	Field Power 0V	17
18	Common (Field Power 24V)	Common (Field Power 24V)	19

3.3.2. LED Indicator

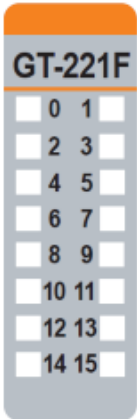

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green
4	Output Channel 4	Green
5	Output Channel 5	Green
6	Output Channel 6	Green
7	Output Channel 7	Green
8	Output Channel 8	Green
9	Output Channel 9	Green
10	Output Channel 10	Green
11	Output Channel 11	Green
12	Output Channel 12	Green
13	Output Channel 13	Green
14	Output Channel 14	Green
15	Output Channel 15	Green

3.3.3. Channel Status LED

Status	LED	To indicate
Not Signal	Off	Normal Operation
On Signal	Green	Normal Operation

3.3.4. Environment Specification

Environmental specification	
Operating Temperature	-40°C~70°C
UL Temperature	-20°C~60°C
Storage Temperature	-40°C~85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN rail
General specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	<p>Based on IEC 60068-2-6 Sine Vibration</p> <p>5 ~ 25Hz : ±1.6mm</p> <p>25 ~ 300Hz : 4g</p> <p>Sweep Rate : 1 Oct/min, 20 cycles</p> <p>Random Vibration</p> <p>10 ~ 40 Hz : 0.0125 g²/Hz</p> <p>40 ~ 100 Hz : 0.0125 → 0.002 g²/Hz</p> <p>100 ~ 500 Hz : 0.002 g²/Hz</p> <p>500 ~ 2000 Hz : 0.002 → 1.3 x 10⁻⁴g²/Hz</p> <p>Test time : 1hrs for each test</p>
Industrial Emissions	EN61000-6-4/All : 2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available.
Product Certifications	CE, UL


3.3.5. Specification

Items	Specification
Input Specification	
Output per module	16 Points Sink type
Indicators	16 Green output state
Output Voltage Range	Nominal 24Vdc, Min. 15Vdc ~ Max. 32Vdc
ON-state voltage drop	Max. 0.3Vdc @ 25°C / 0.5Vdc@ 70°C
ON-State Min. Current	1mA per channel
OFF-State Leakage current	Max. 30uA
Output Signal Delay	OFF to ON : 0.5ms maximum ON to OFF : 0.5ms maximum
Output Current Rating	Max. 0.3A per channel / Max. 4.8A per unit
Protection	Over Current limit: Min. 3.5A@ 25°C per each channels Thermal Shutdown : Min 3A@ 25°C per each channels Short circuit protection
COMMON Type	16 points / 2 COM (Single Common)
General specification	
Power dissipation	50mA maximum @ 5.0Vdc
Isolation	I/O to Logic : Photocouplerisolation
Field Power	Supply voltage : 24Vdc nominal Voltage range : 15~32Vdc Power dissipation: 10mA @24Vdc
Wiring	20Pin Connector Type
Weight	53g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.3.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0
Byte1	D15	D14	D13	D12	D11	D10	D9	D8



- Output Module Data

D7	D6	D5	D4	D3	D2	D1	D0
D15	D14	D13	D12	D11	D10	D9	D8


3.3.7. Parameter Data

- Valid Parameter length : 4 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Fault Action (ch0~ch7) 0: Fault value, 1:Hold last state							
Byte1	Fault Action (ch8~ch15) 0: Fault value, 1:Hold last state							
Byte2	Faultvalue (ch0~ch7) 0:Off, 1:On							
Byte3	Faultvalue (ch8~ch15) 0:Off, 1:On							


3.4. GT-222F

3.4.1. Wiring Diagram

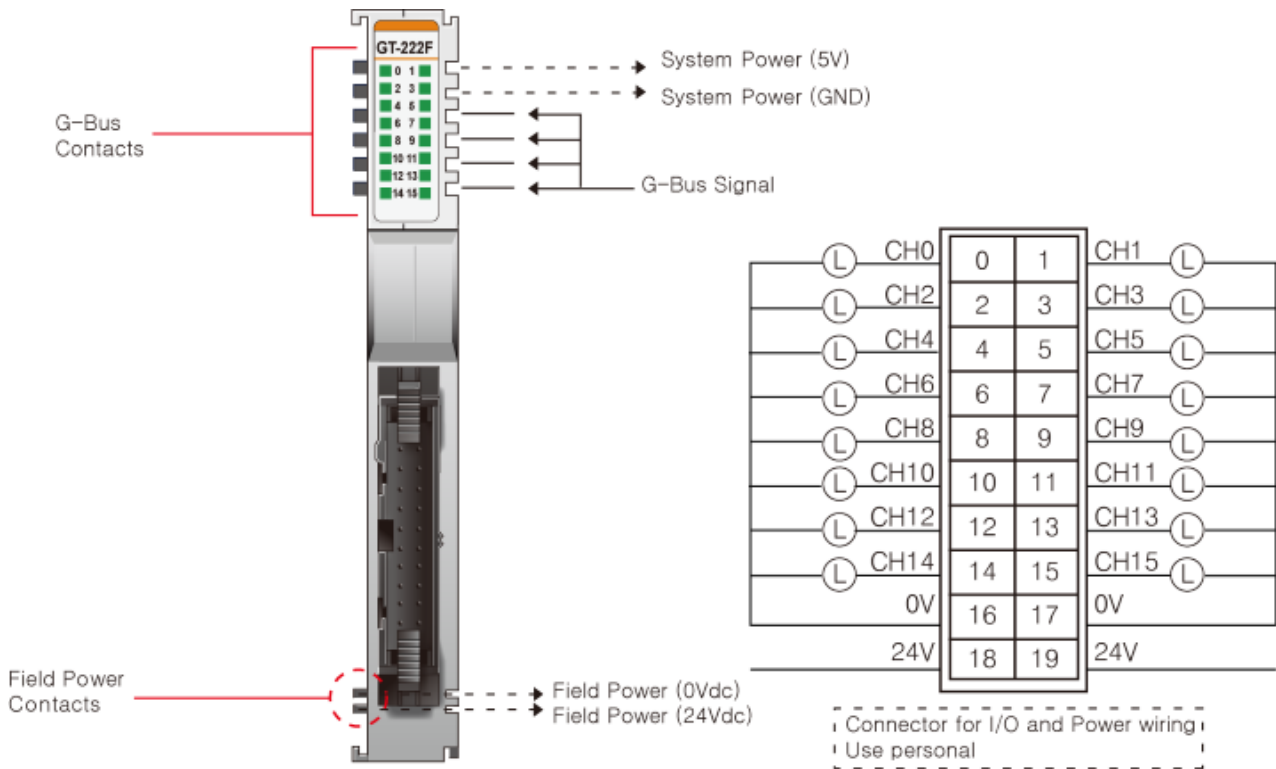

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel0	Output Channel 1	1
2	Output Channel2	Output Channel3	3
4	Output Channel4	Output Channel5	5
6	Output Channel6	Output Channel7	7
8	Output Channel8	Output Channel9	9
10	Output Channel 10	Output Channel 11	11
12	Output Channel 12	Output Channel 13	13
14	Output Channel 14	Output Channel 15	15
16	Common (Field Power 0V)	Common (Field Power 0V)	17
18	Field Power 24V	Field Power 24V	19

3.4.2. LED Indicator

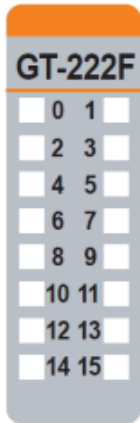

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green
4	Output Channel 4	Green
5	Output Channel 5	Green
6	Output Channel 6	Green
7	Output Channel 7	Green
8	Output Channel 8	Green
9	Output Channel 9	Green
10	Output Channel 10	Green
11	Output Channel 11	Green
12	Output Channel 12	Green
13	Output Channel 13	Green
14	Output Channel 14	Green
15	Output Channel 15	Green

3.4.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.4.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


3.4.5. Specification

Items	Specification
Output Specification	
Output Per Module	16 Points Source Type
Indicators	16 Green Output Status LEDs
Output Voltage Range	24Vdc (Min. 15Vdc ~ Max. 32Vdc)
ON-state Voltage Drop	Max. 0.3Vdc @ 25°C / 0.5Vdc @ 70°C
ON-State Min. Current	Min. 1mA / Channel
OFF-State Leakage Current	Max. 5uA
Output Signal Delay	OFF to ON : Max. 0.3ms ON to OFF : Max. 0.3ms
Output Current Rating	Max. 0.3A / Channel, Max. 3.6A Per Unit
Protection	Over Current limit : Min. 6.5A @ 25°C / Channel Thermal Shutdown : Min. 4A @ 25°C/ Channel Short Circuit Protection
Common Type	16 points / 2 Common
General Specification	
Power Dissipation	Max. 50mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 15~32Vdc Power Dissipation : 20mA @ 24Vdc
Wiring	20Pin Connector Type
Weight	52g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.4.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0
Byte1	D15	D14	D13	D12	D11	D10	D9	D8



- Output Module Data

D7	D6	D5	D4	D3	D2	D1	D0
D15	D14	D13	D12	D11	D10	D9	D8


3.4.7. Parameter Data

- Valid Parameter length : 4 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Fault Action (ch0~ch7) 0: Fault value, 1:Hold last state							
Byte1	Fault Action (ch8~ch15) 0: Fault value, 1:Hold last state							
Byte2	Fault value (ch0~ch7) 0:Off, 1:On							
Byte3	Fault value (ch8~ch15) 0:Off, 1:On							


3.5. GT-225F

3.5.1 Wiring Diagram

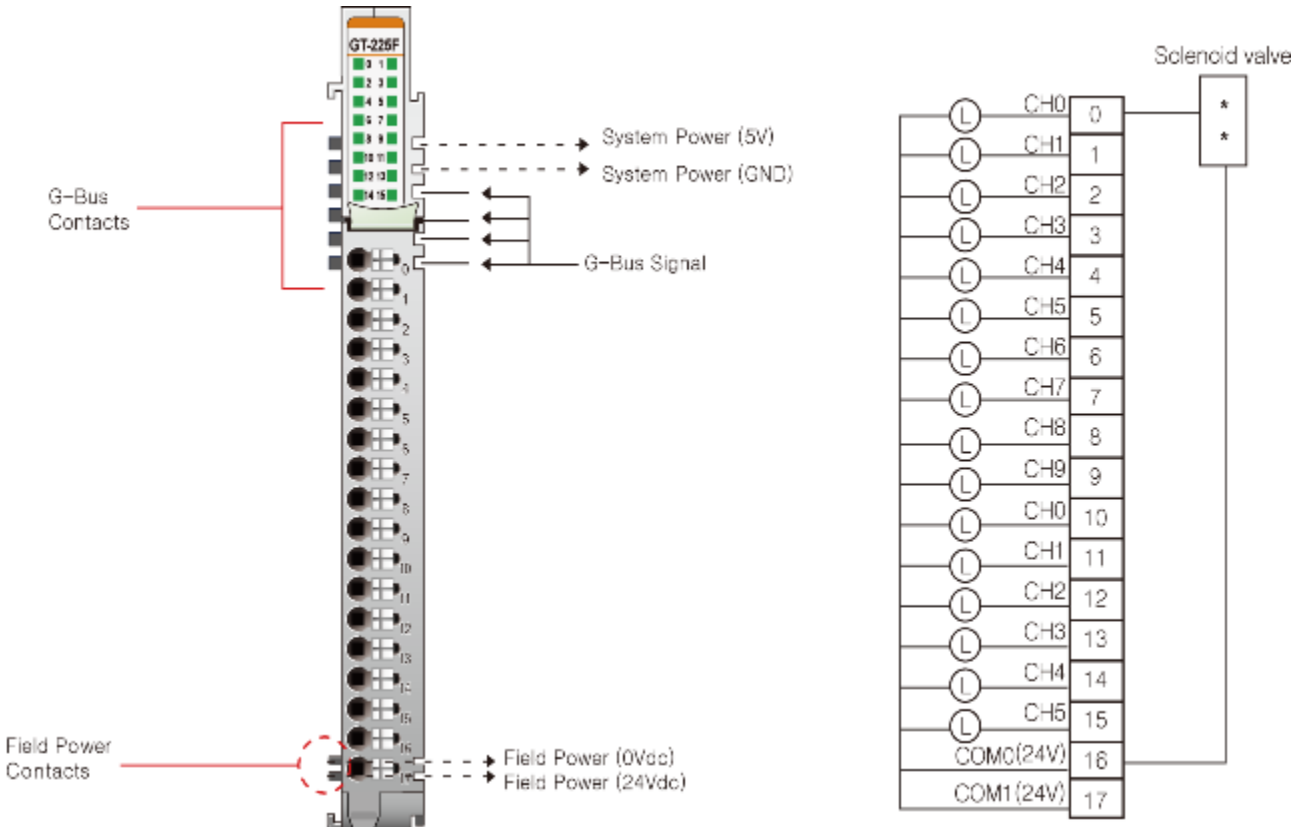

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	Output Channel 1	1
2	Output Channel 2	Output Channel 3	3
4	Output Channel 4	Output Channel 5	5
6	Output Channel 6	Output Channel 7	7
8	Output Channel 8	Output Channel 9	9
10	Output Channel 10	Output Channel 11	11
12	Output Channel 12	Output Channel 13	13
14	Output Channel 14	Output Channel 15	15
16	Common (Field Power 24V)	Common (Field Power 24V)	17

3.5.2 LED Indicator



LEDNo.	LED Function / Description	LED Color
0	OUTPUT Channel 0	Green
1	OUTPUT Channel 1	Green
2	OUTPUT Channel 2	Green
3	OUTPUT Channel 3	Green
4	OUTPUT Channel 4	Green
5	OUTPUT Channel 5	Green
6	OUTPUT Channel 6	Green
7	OUTPUT Channel 7	Green
8	OUTPUT Channel 8	Green
9	OUTPUT Channel 9	Green
10	OUTPUT Channel 10	Green
11	OUTPUT Channel 11	Green
12	OUTPUT Channel 12	Green
13	OUTPUT Channel 13	Green
14	OUTPUT Channel 14	Green
15	OUTPUT Channel 15	Green

3.5.3 Channel Status LED

Status	LED	To indicate
Not Signal	Off	Normal Operation
On Signal	Green	Normal Operation

3.5.4 Environment Specification

Environmental specification	
Operation Temperature	-40°C to 70°C
Non-Operating Temperature	-40°C to 85°C
Relative Humidity	5% to 95% Non-condensing
Operating Altitude	2,000m
Mounting	
General specification	General specification
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 cycles Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
Industrial Emissions	EN 61000-6-4 : 2007 +A1:2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available.
Product Certifications	CE, UL

3.5.5 Specification

Items	Specification
Input Specification	
Output per module	16 Points Sink type
Indicators	16 Green output state
Output Voltage Range	Nominal 24Vdc, Min. 15Vdc ~ Max. 32Vdc
ON-state voltage drop	Max. 0.3Vdc @ 25°C / 0.5Vdc@ 70°C
ON-State Min. Current	1mA per channel
OFF-State Leakage current	Max. 20uA
Output Signal Delay	OFF to ON : 0.3mS maximum ON to OFF : 0.5mS maximum
Output Current Rating	Max. 0.3A per channel / Max. 4.8A per unit
Protection (VNS3NV04D-E)	Over Current limit: Min. 3.5A@ 25°C per each channels (VNS3NV04D-E) Thermal Shutdown: Min 3A@ 25°C per each channels (VNS3NV04D-E, Min 150°C) Short circuit protection
COMMON Type	16 points / 2COM (Single Common)
General specification	
Power dissipation	50mA maximum @ 5.0Vdc
Isolation	I/O to Logic : Photocouplerisolation
Field Power	Supply voltage : 24Vdc nominal Voltage range : 15~32Vdc Power dissipation: 30mA maximum @ 32.0Vdc
Wiring	I/O Cable Max. 0.75mm ² (AWG 18)
Weight	63g
Module Size	12mm x 109mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.5.6 Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0
Byte1	D15	D14	D13	D12	D11	D10	D9	D8



- Output Module Data

D7	D6	D5	D4	D3	D2	D1	D0
D15	D14	D13	D12	D11	D10	D9	D8


3.5.7 Parameter Data

- Valid Parameter length :4 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	FaultAction (ch0~ch7)				0: Fault value, 1:Hold last state			
Byte1	Fault Action (ch8~ch15)				0: Fault value, 1:Hold last state			
Byte2	Fault value (ch0~ch7)				0:Off, 1:On			
Byte3	Fault value (ch8~ch15)				0:Off, 1:On			


3.6 GT-226F

3.6.1 Wiring Diagram

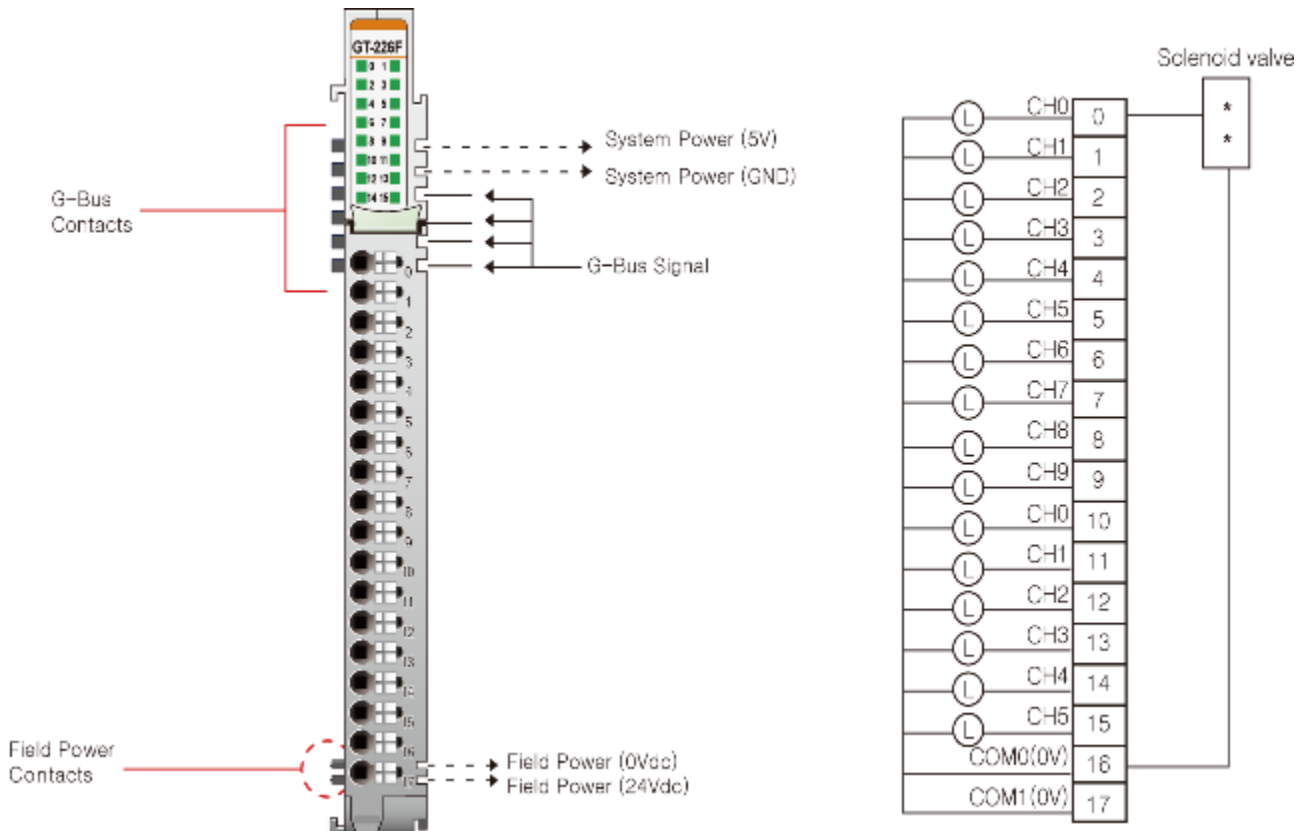

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	Output Channel 1	1
2	Output Channel 2	Output Channel 3	3
4	Output Channel 4	Output Channel 5	5
6	Output Channel 6	Output Channel 7	7
8	Output Channel 8	Output Channel 9	9
10	Output Channel 10	Output Channel 11	11
12	Output Channel 12	Output Channel 13	13
14	Output Channel 14	Output Channel 15	15
16	Common (Field Power 0V)	Common (Field Power 0V)	17

3.6.2 LED Indicator



LEDNo.	LED Function / Description	LED Color
0	OUTPUT Channel 0	Green
1	OUTPUT Channel 1	Green
2	OUTPUT Channel 2	Green
3	OUTPUT Channel 3	Green
4	OUTPUT Channel 4	Green
5	OUTPUT Channel 5	Green
6	OUTPUT Channel 6	Green
7	OUTPUT Channel 7	Green
8	OUTPUT Channel 8	Green
9	OUTPUT Channel 9	Green
10	OUTPUT Channel 10	Green
11	OUTPUT Channel 11	Green
12	OUTPUT Channel 12	Green
13	OUTPUT Channel 13	Green
14	OUTPUT Channel 14	Green
15	OUTPUT Channel 15	Green

3.6.3 Cannel Status LED

Status	LED	To indicate
Not Signal	Off	Normal Operation
On Signal	Green	Normal Operation

3.6.4 Environment Specification

Environmental specification	
Operation Temperature	-40°C to 70°C
Non-Operating Temperature	-40°C to 85°C
Relative Humidity	5% to 95% Non-condensing
Operating Altitude	2,000m
General specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 cycles Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
Industrial Emissions	EN 61000-6-4 : 2007+A1:2011
Industrial Immunity	EN 61000-6-2 : 2005
Installation Position	Vertical and horizontal installation is available.
Product Certifications	CE, UL

3.6.5 Specification

Items	Specification
Input Specification	
Output per module	16 Points Source type
Indicators	16 Green output state
Output Voltage Range	Nominal 24Vdc, Min. 15Vdc ~ Max. 32Vdc
ON-state voltage drop	Max. 0.3Vdc @ 25°C / 0.5Vdc@ 70°C
ON-State Min. Current	1mA per channel
OFF-State Leakage current	Max. 5uA
Output Signal Delay	OFF to ON : 0.3mS maximum ON to OFF : 0.3mS maximum
Output Current Rating	Max. 0.3A per channel / Max. 4.8A per unit
Protection (ITS716G)	Over Current limit : Min 6.5A@ 25°C per each channels(ITS716G) Thermal Shutdown : Min 4A@ 25°C per each channels (ITS716G, Min 150°C) Short circuit protection
COMMON Type	16 points / 2COM (Single Common)
General specification	
Power dissipation	50mA maximum @ 5.0Vdc
Isolation	I/O to Logic : Photocouplerisolation
Field Power	Supply voltage : 24Vdc nominal Voltage range : 15~32Vdc Power dissipation: 40mA maximum @ 32.0Vdc
Wiring	I/O Cable Max. 0.75mm ² (AWG 18)
Weight	63g
Module Size	12mm x 109mm x 70mm

3.6.6 Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0
Byte1	D15	D14	D13	D12	D11	D10	D9	D8



- Output Module Data

D7	D6	D5	D4	D3	D2	D1	D0
D15	D14	D13	D12	D11	D10	D9	D8

3.6.7 Parameter Data


Valid Parameter length: 4 Bytes

Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Fault Action (ch0~ch7) 0: Fault value, 1: Hold last state							
Byte1	Fault Action (ch8~ch15) 0: Fault value, 1: Hold last state							
Byte2	Fault value (ch0~ch7)				0: Off, 1: On			
Byte3	Fault value (ch8~ch15)				0: Off, 1: On			


3.7. GT-22BA

3.7.1. Wiring Diagram

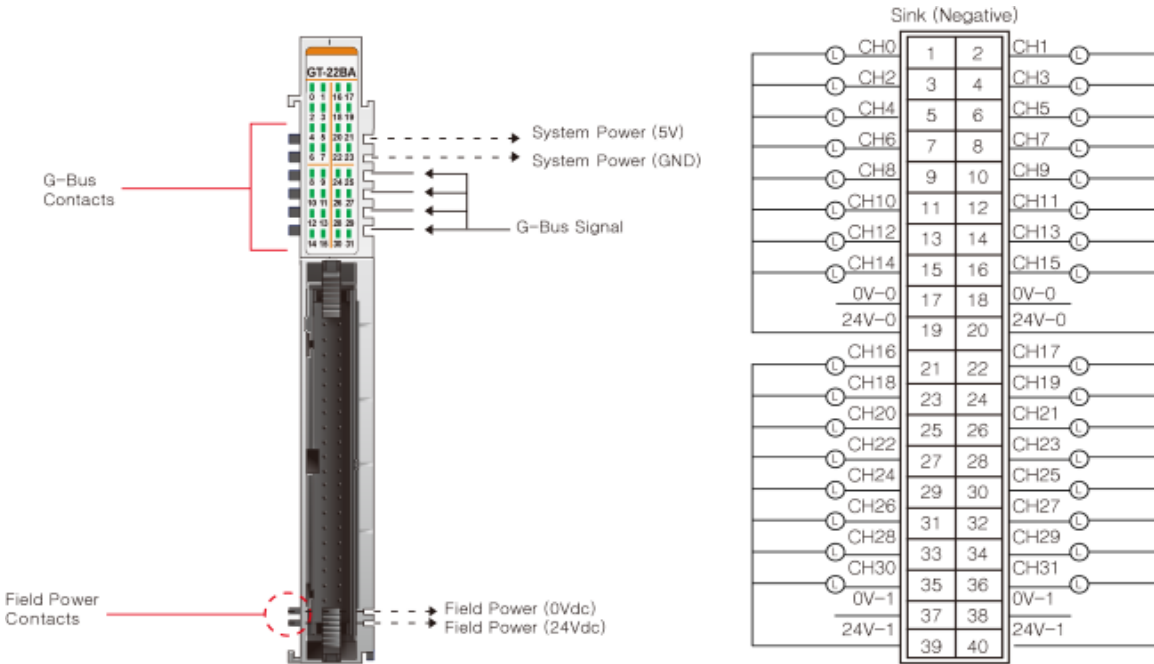

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel0	Output Channel 1	1
2	Output Channel2	Output Channel3	3
4	Output Channel4	Output Channel5	5
6	Output Channel6	Output Channel7	7
8	Output Channel8	Output Channel9	9
10	Output Channel10	Output Channel11	11
12	Output Channel12	Output Channel13	13
14	Output Channel14	Output Channel15	15
16	Field Power 0V	Field Power 0V	17
18	Common (Field Power 24V)	Common (Field Power 24V)	19
20	Output Channel16	Output Channel17	21
22	Output Channel18	Output Channel19	23
24	Output Channel20	Output Channel21	25
26	Output Channel22	Output Channel23	27
28	Output Channel24	Output Channel25	29
30	Output Channel26	Output Channel27	31
32	Output Channel28	Output Channel29	33
34	Output Channel30	Output Channel31	35
36	Field Power 0V	Field Power 0V	37
38	Common (Field Power 24V)	Common (Field Power 24V)	39

3.7.2. LED Indicator

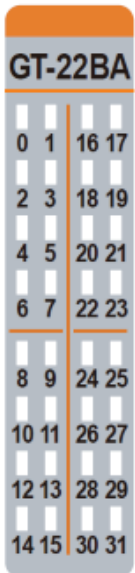

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
...
31	Output Channel 31	Green

3.7.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.7.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


3.7.5. Specification

Items	Specification
Output Specification	
Output Per Module	32 Points Sink Type
Indicators	32 Green Output Status LEDs
Output Voltage Range	24Vdc (Min. 15Vdc ~ Max. 32Vdc)
ON-state voltage drop	Max. 0.3Vdc @ 25°C / 0.5Vdc @ 70°C
ON-State Min. Current	Min. 1mA / Channel
OFF-State Leakage current	Max. 25uA
Output Signal Delay	OFF to ON : Max. 0.3ms ON to OFF : Max. 0.5ms 0 ch ~ 15 ch < 16 ch ~ 31 ch : max. 20us
Output Current Rating	Max. 0.3A / Channel, Max. 6.0A Per Unit
Protection	Over Current limit : Min. 3.5A @ 25°C per each channels Thermal Shutdown : Min. 3A @ 25°C per each channels Short Circuit Protection
Common Type	32 points / 4 Common
General Specification	
Power Dissipation	Max. 65mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 15~32Vdc Power Dissipation : 10mA @ 24Vdc
Wiring	Module Connector : HIF3BA-40D-2.54R
Weight	59g
Module Size	12mm x 109mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.7.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0
Byte1	D15	D14	D13	D12	D11	D10	D9	D8
Byte2	D23	D22	D21	D20	D19	D18	D17	D16
Byte3	D31	D30	D29	D28	D27	D26	D25	D24



- Output Module Data

D7	D6	D5	D4	D3	D2	D1	D0
D15	D14	D13	D12	D11	D10	D9	D8
D23	D22	D21	D20	D19	D18	D17	D16
D31	D30	D29	D28	D27	D26	D25	D24


3.7.7. Parameter Data

- Valid Parameter length : 8 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	FaultAction (ch0~ch7)				0: Fault value, 1:Hold last state			
Byte1	Fault Action (ch8~ch15)				0: Faultvalue, 1:Hold last state			
Byte2	Fault Action (ch16~ch23)				0: Fault value, 1:Hold last state			
Byte3	Fault Action (ch24~ch31)				0: Fault value, 1:Hold last state			
Byte4	Fault value (ch0~ch7)				0:Off, 1:On			
Byte5	Fault value (ch8~ch15)				0:Off, 1:On			
Byte6	Fault value (ch16~ch23)				0:Off, 1:On			
Byte7	Fault value (ch24~ch31)				0:Off, 1:On			


3.8. GT-22CA

3.8.1. Wiring Diagram

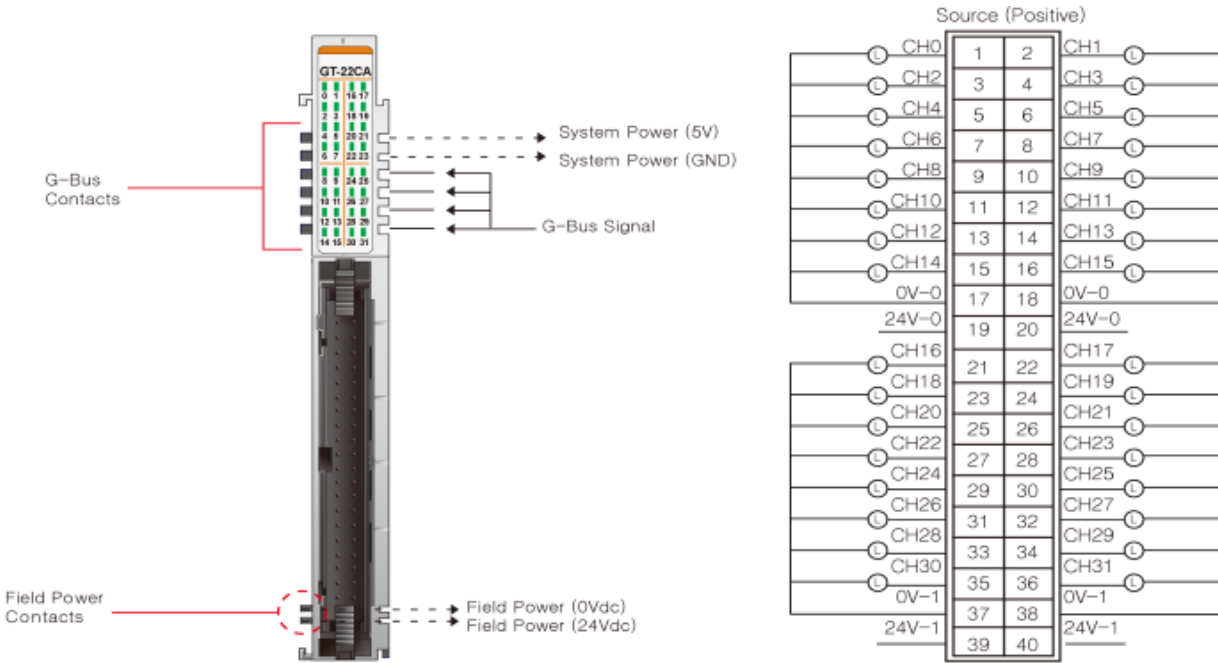

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	Output Channel 1	1
2	Output Channel 2	Output Channel 3	3
4	Output Channel 4	Output Channel 5	5
6	Output Channel 6	Output Channel 7	7
8	Output Channel 8	Output Channel 9	9
10	Output Channel 10	Output Channel 11	11
12	Output Channel 12	Output Channel 13	13
14	Output Channel 14	Output Channel 15	15
16	Common (Field Power 0V)	Common (Field Power 0V)	17
18	Field Power 24V	Field Power 24V	19
20	Output Channel 16	Output Channel 17	21
22	Output Channel 18	Output Channel 19	23
24	Output Channel 20	Output Channel 21	25
26	Output Channel 22	Output Channel 23	27
28	Output Channel 24	Output Channel 25	29
30	Output Channel 26	Output Channel 27	31
32	Output Channel 28	Output Channel 29	33
34	Output Channel 30	Output Channel 31	35
36	Common (Field Power 0V)	Common (Field Power 0V)	37
38	Field Power 24V	Field Power 24V	39

3.8.2. LED Indicator

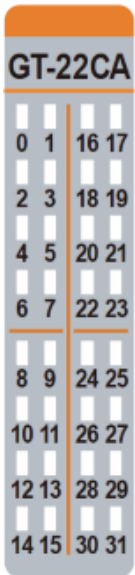

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
...
31	Output Channel 31	Green

3.8.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.8.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


3.8.5. Specification

Items	Specification
Output Specification	
Output Per Module	32 Points Source type
Indicators	32 Green Output Status LEDs
Output Voltage Range	24Vdc (Min. 15Vdc ~ Max. 32Vdc)
ON-state Voltage Drop	Max. 0.3Vdc @ 25°C / 0.5Vdc @ 70°C
ON-State Min. Current	Min. 1mA / Channel
OFF-State Leakage Current	Max. 5uA
Output Signal Delay	OFF to ON : Max. 0.3ms ON to OFF : Max. 0.5ms 0 ch ~ 15 ch < 16 ch ~ 31 ch : max. 20us
Output Current Rating	Max. 0.3A / Channel, Max. 6.0A Per Unit
Protection	Over Current limit : Min. 6.5A @ 25°C per each channels Thermal Shutdown : Min. 4A @ 25°C per each channels Short Circuit Protection
Common Type	32 points / 4 Common
General Specification	
Power Dissipation	Max. 65mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 15~32Vdc Power Dissipation : 30mA @ 24Vdc
Wiring	Module Connector : HIF3BA-40D-2.54R
Weight	63g
Module Size	12mm x 109mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.8.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0
Byte1	D15	D14	D13	D12	D11	D10	D9	D8
Byte2	D23	D22	D21	D20	D19	D18	D17	D16
Byte3	D31	D30	D29	D28	D27	D26	D25	D24



- Output Module data

D7	D6	D5	D4	D3	D2	D1	D0
D15	D14	D13	D12	D11	D10	D9	D8
D23	D22	D21	D20	D19	D18	D17	D16
D31	D30	D29	D28	D27	D26	D25	D24


3.8.7. Parameter Data

- Valid Parameter Length : 8 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	FaultAction (ch0~ch7)				0: Fault value, 1:Hold last state			
Byte1	Fault Action (ch8~ch15)				0: Faultvalue, 1:Hold last state			
Byte2	Fault Action (ch16~ch23)				0: Fault value, 1:Hold last state			
Byte3	Fault Action (ch24~ch31)				0: Fault value, 1:Hold last state			
Byte4	Fault value (ch0~ch7)				0:Off, 1:On			
Byte5	Fault value (ch8~ch15)				0:Off, 1:On			
Byte6	Fault value (ch16~ch23)				0:Off, 1:On			
Byte7	Fault value (ch24~ch31)				0:Off, 1:On			


3.9. GT-2618

3.9.1. Wiring Diagram

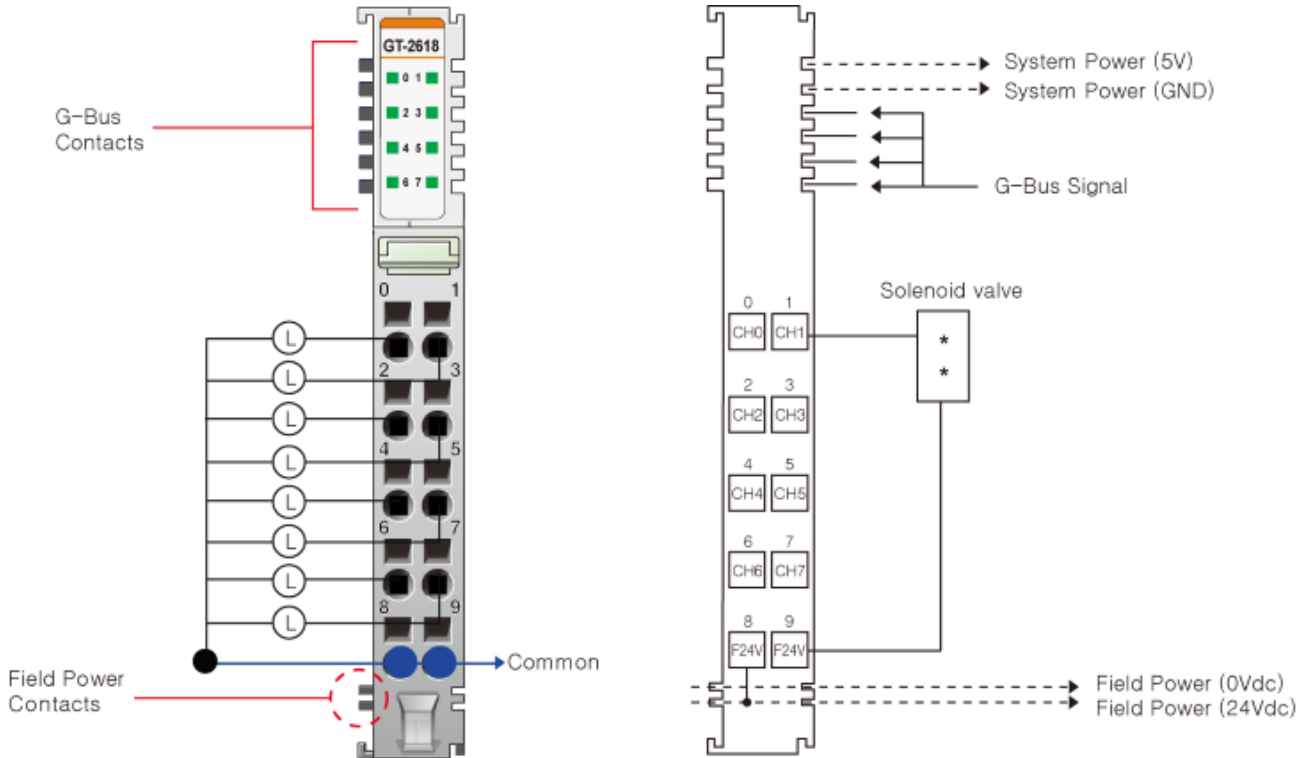

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	Output Channel 1	1
2	Output Channel 2	Output Channel 3	3
4	Output Channel 4	Output Channel 5	5
6	Output Channel 6	Output Channel 7	7
8	Common (Field Power 24V)	Common (Field Power 24V)	9

3.9.2. LED Indicator

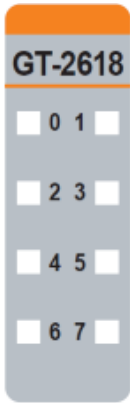

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green
4	Output Channel 4	Green
5	Output Channel 5	Green
6	Output Channel 6	Green
7	Output Channel 7	Green

3.9.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.9.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


3.9.5. Specification

Items	Specification
Output Specification	
Output Per Module	8 Points Sink type
Indicators	8 Green Output Status LEDs
Output Voltage Range	24Vdc (Min. 15Vdc ~ Max. 32Vdc)
ON-state Voltage Drop	Max. 1Vdc @ 25°C
ON-State Min. Current	Min. 1mA / Channel
OFF-State Leakage Current	Max. 150uA
Output Signal Delay	OFF to ON : Max. 0.3ms ON to OFF : Max. 0.3ms
Output Current Rating	Max. 2A / Channel Operating Temperature -40°C~50°C : Max. 10A Per Unit 50°C~60°C : Max. 7A Per Unit 60°C~70°C : Max. 4.8A Per Unit
Common Type	8 points / 2 Common
General Specification	
Power Dissipation	Max. 50mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 15~32Vdc Power Dissipation : 30mA @ 24Vdc
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Weight	70g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.9.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0



- Output Module data

D7	D6	D5	D4	D3	D2	D1	D0
----	----	----	----	----	----	----	----


3.9.7. Parameter Data

- Valid Parameter Length : 2 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Fault Action (ch0~ch7) 0: Fault value, 1: Hold last state							
Byte1	FaultAction (ch0~ch7) 0: Off, 1: On							


3.10. GT-2628

3.10.1 Wiring Diagram

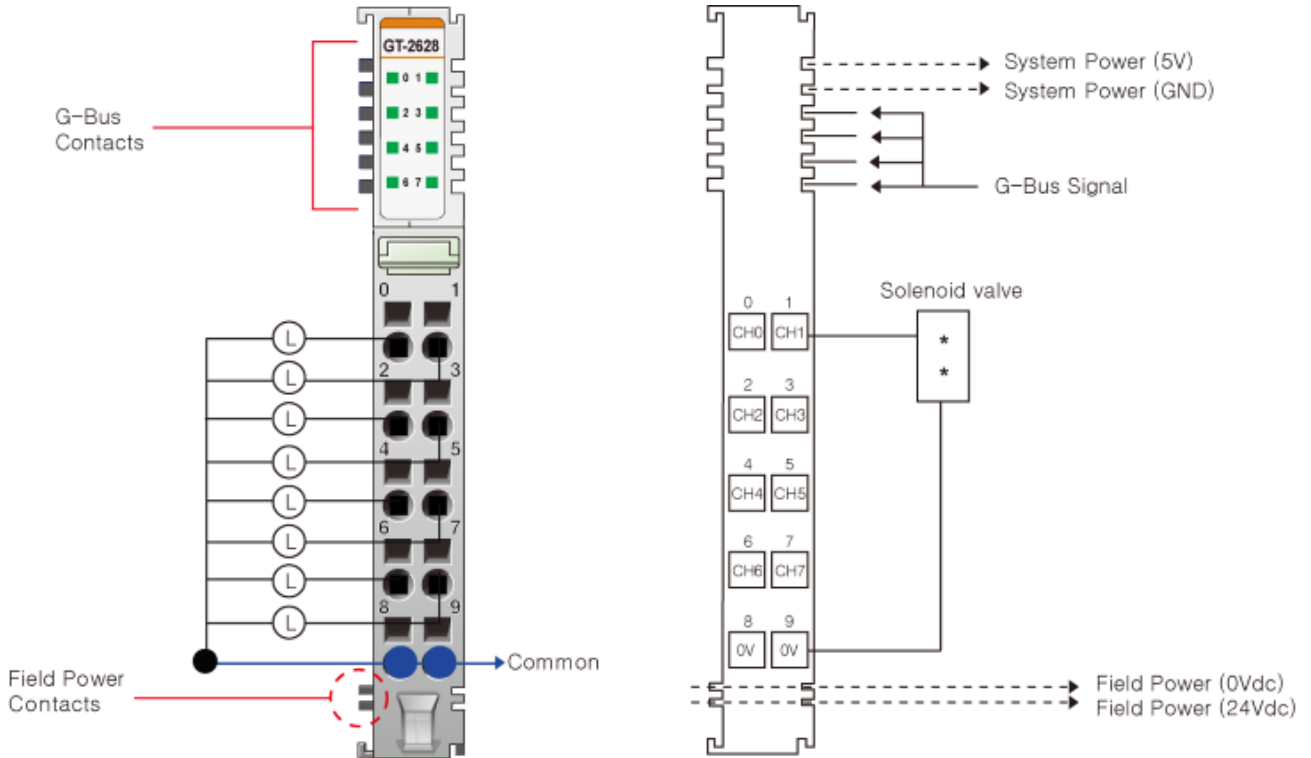

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	Output Channel 1	1
2	Output Channel 2	Output Channel 3	3
4	Output Channel 4	Output Channel 5	5
6	Output Channel 6	Output Channel 7	7
8	Common (Field Power 0V)	Common (Field Power 0V)	9

3.10.2. LED Indicator

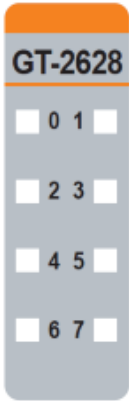

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green
4	Output Channel 4	Green
5	Output Channel 5	Green
6	Output Channel 6	Green
7	Output Channel 7	Green

3.10.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.10.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : $\pm 1.6\text{mm}$ - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : $0.0125\text{g}^2/\text{Hz}$ - 40 ~ 100 Hz : $0.0125 \rightarrow 0.002\text{g}^2/\text{Hz}$ - 100 ~ 500 Hz : $0.002\text{g}^2/\text{Hz}$ - 500 ~ 2000 Hz : $0.002 \rightarrow 1.3 \times 10^{-4}\text{g}^2/\text{Hz}$ - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


3.10.5. Specification

Items	Specification
Output Specification	
Output Per Module	8 Points Source type
Indicators	8 Green Output Status LEDs
Output Voltage Range	24Vdc (Min. 15Vdc ~ Max. 32Vdc)
ON-state Voltage Drop	Max. 1Vdc @ 25°C
ON-State Min. Current	Min. 1mA / Channel
OFF-State Leakage Current	Max. 150uA
Output Signal Delay	OFF to ON : Max. 0.3ms ON to OFF : Max. 0.3ms
Output Current Rating	Max. 2A / Channel Operating Temperature -40°C~50°C : Max. 10A Per Unit 50°C~60°C : Max. 7A Per Unit 60°C~70°C : Max. 4.8A Per Unit
Common Type	8 points / 2 Common
General Specification	
Power Dissipation	Max. 45mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 15~32Vdc Power Dissipation : 30mA @ 24Vdc
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Weight	70g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.10.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	D7	D6	D5	D4	D3	D2	D1	D0



- Output Module data

D7	D6	D5	D4	D3	D2	D1	D0
----	----	----	----	----	----	----	----


3.10.7. Parameter Data

- Valid Parameter Length : 2 Bytes
- Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Fault Action (ch0~ch7) 0: Fault value, 1: Hold last state							
Byte1	FaultAction (ch0~ch7) 0: Off, 1: On							

3.11. GT-2734

3.11.1. Wiring Diagram

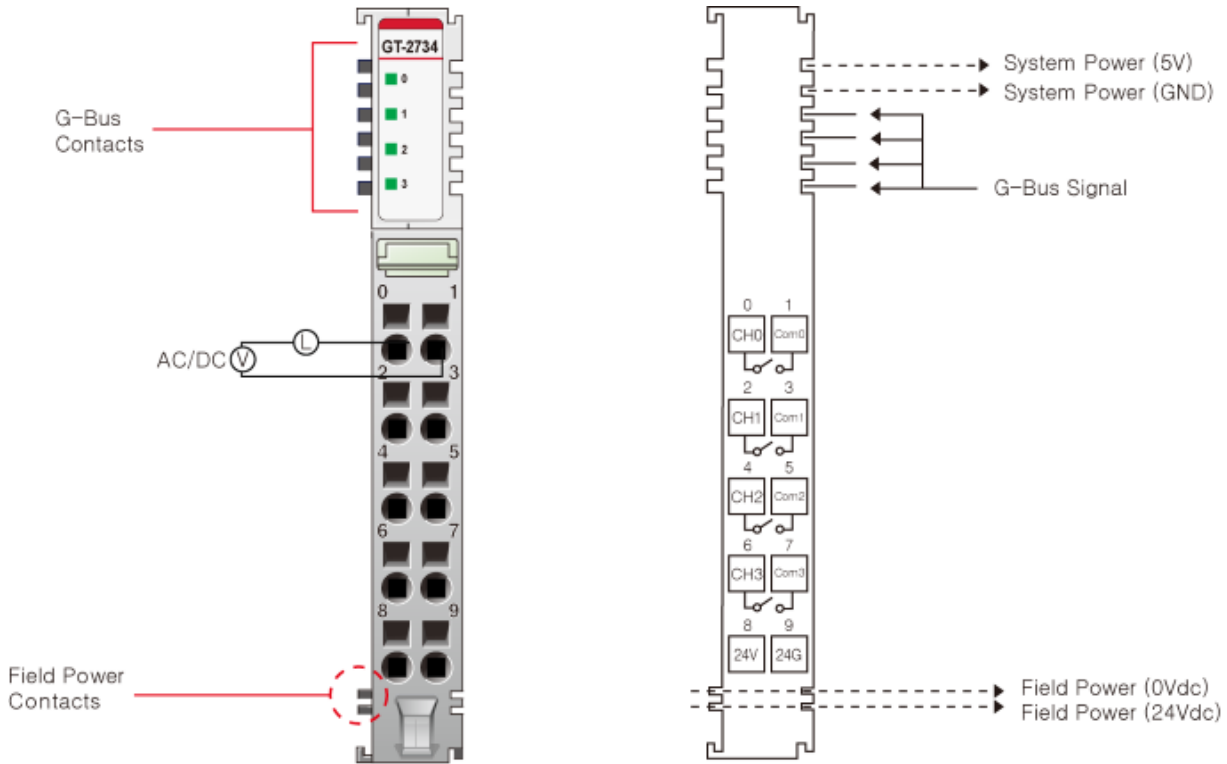

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	COM 0	1
2	Output Channel 1	COM 1	3
4	Output Channel 2	COM 2	5
6	Output Channel 3	COM 3	7
8	Common (Field Power 24V)	Common (Field Power 0V)	9

3.11.2. LED Indicator



LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green

3.11.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.11.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


3.11.5. Specification

Items	Specification
Output Specification	
Output Per Module	4 Points Bi-directional
Indicators	4 Green Output Status LEDs
Relay Type	MOS Relay (Solid State Relay)
Output Voltage Range (Load Dependent)	Max. 240Vac @ 0.5A resistive Max. 240Vdc @ 0.5A resistive
Output Delay Time (Resistive Load)	Max. 240Vac / 240Vdc OFF to ON : Max. 0.6ms ON to OFF : Max. 3ms
Output Current Rating	Max. 0.5A / Channel
Frequency Range (Vac)	47 ~ 63Hz
Common Type	4 points / 2 Common
General Specification	
Power Dissipation	80mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Field Power passes through to the next module Supply Voltage : 24Vdc nominal Voltage Range : 15~32Vdc (AC Power not used)
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.11.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Reserved				D3	D2	D1	D0



- Output Module data

Reserved	D3	D2	D1	D0
----------	----	----	----	----


3.11.7. Parameter Data

- Valid Parameter Length : 2 Bytes
- Parameter Data

Offset	Decimal Bit	Description	Default Value
Byte0	00-03	Fault Action(0~3) 0: Fault value, 1: Hold last state	0(Fault value)
Byte1	00-03	Fault value(0~3) 0: Off, 1: On	0(Off)

3.12. GT-2744

3.12.1 Wiring Diagram

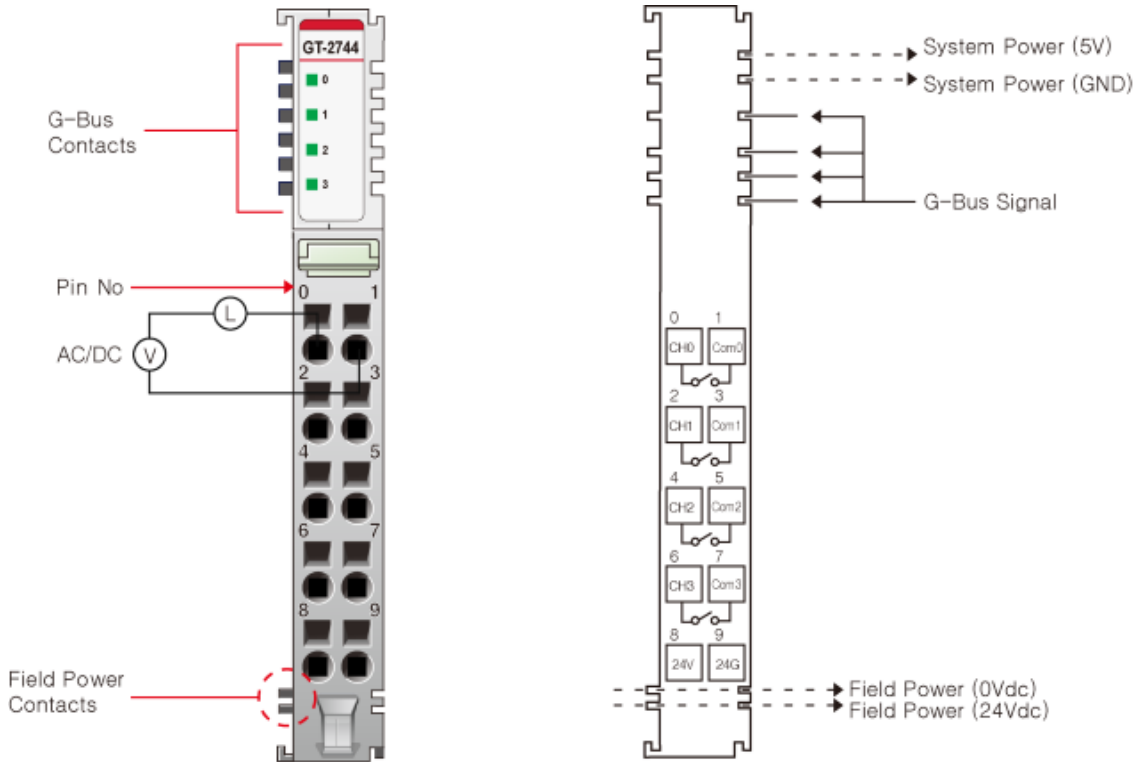

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	COM 0	1
2	Output Channel 1	COM 1	3
4	Output Channel 2	COM 2	5
6	Output Channel 3	COM 3	7
8	Common (Field Power 24V)	Common (Field Power 0V)	9

3.12.2 LED Indicator



LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green

3.12.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.12.4 Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL

3.12.5. Specification


Items	Specification
Output Specification	
Output Per Module	4 Points Bi-directional
Indicators	4 Green Output Status LEDs
Relay Type	Form A, Single Pole Single Throw(SPST)
Output Voltage Range (Load Dependent)	0~32Vdc @ 2A resistive 48Vdc @ 0.8A resistive 110Vdc @ 0.5A resistive Max. 240Vac @ 2A resistive
Output Delay Time (Resistive Load)	OFF to ON : Max. 5ms @ 24Vdc ON to OFF : Max. 8ms @ 24Vdc OFF to ON : Max. 5ms @ 220Vac ON to OFF : Max. 15ms @ 220Vac
Output Current Rating (At Rated Power)	2A @ 0~32Vdc 0.8A @ 48Vdc 0.5A @ 110Vdc 2A @ 240Vac -40°C~70°C(2A Load 2ch) -40°C~60°C(2A Load 4ch)
Expected Contact Life	20M Cycles(Resistive)
Max. On-State Voltage Drop	0.5V @ 2A, Resistive Load, 24Vdc
Frequency Range(Vac)	47 ~ 63Hz
Common Type	4 points / 2 Common
General Specification	
Power Dissipation	35mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Supply Voltage : 24Vdc nominal Voltage Range : 22~26Vdc Power dissipation : 30mA @ 24Vdc (AC Power not used)
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

* Voltage Drop specification is dependent on the cable length due to the high load.

3.12.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Reserved				D3	D2	D1	D0



- Output Module data

Reserved				D3	D2	D1	D0
----------	--	--	--	----	----	----	----


3.12.7. Parameter Data

- Valid Parameter Length : 2 Bytes
- Parameter Data

Offset	Decimal Bit	Description	Default Value
Byte0	00-03	Fault Action(0~3) 0: Fault value, 1: Hold last state	0(Fault value)
Byte1	00-03	Fault value(0~3) 0: Off, 1: On	0(Off)

3.13. GT-2764

3.13.1. Wiring Diagram

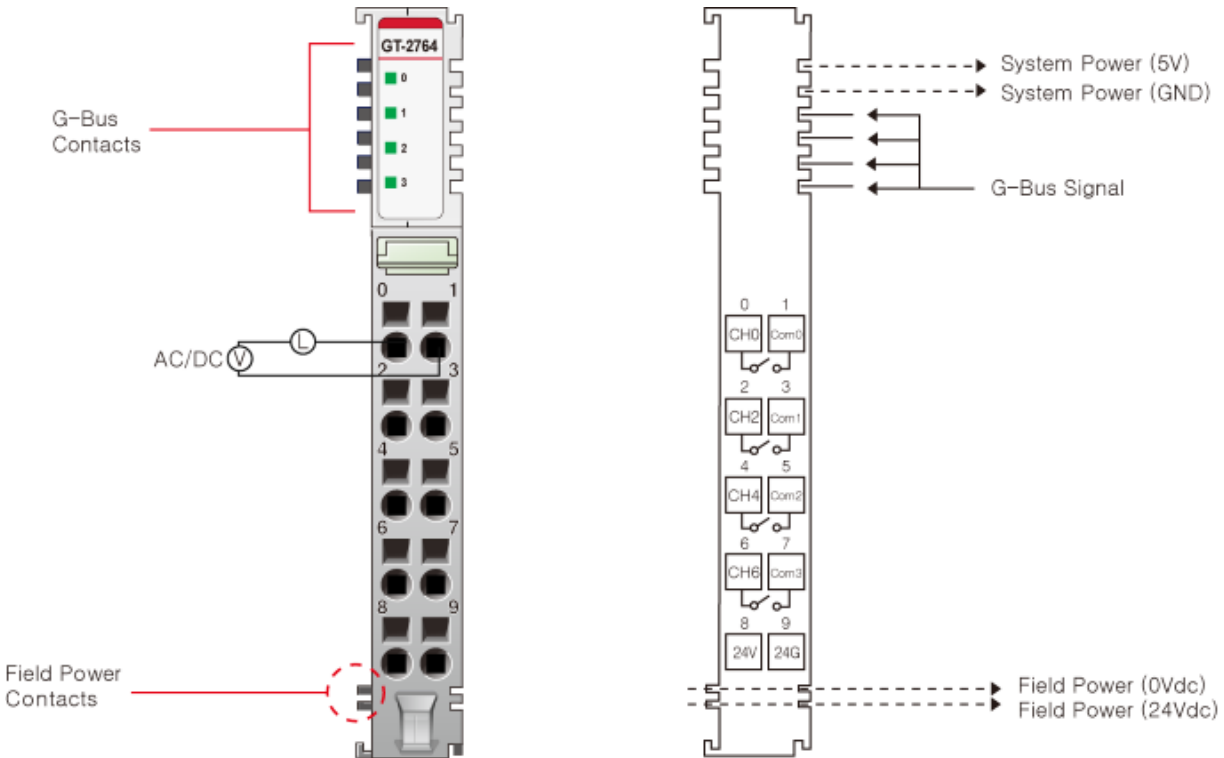

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	COM 0	1
2	Output Channel 1	COM 1	3
4	Output Channel 2	COM 2	5
6	Output Channel 3	COM 3	7
8	Common (Field Power 24V)	Common (Field Power 0V)	9

3.13.2. LED Indicator



LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green

3.13.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.13.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 70°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : $\pm 1.6\text{mm}$ - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : $0.0125\text{ g}^2/\text{Hz}$ - 40 ~ 100 Hz : $0.0125 \rightarrow 0.002\text{ g}^2/\text{Hz}$ - 100 ~ 500 Hz : $0.002\text{ g}^2/\text{Hz}$ - 500 ~ 2000 Hz : $0.002 \rightarrow 1.3 \times 10^{-4}\text{ g}^2/\text{Hz}$ - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


3.13.5. Specification

Items	Specification
Output Specification	
Output Per Module	4 Points Bi-directional
Indicators	4 Green Output Status LEDs
Relay Type	MOS Relay (Solid State Relay)
Output Voltage Range (Load Dependent)	Max. 24Vac @ 2A resistive Max. 24Vdc @ 2A resistive
Output Delay Time (Resistive Load)	OFF to ON : Max. 1ms @ 24Vac ON to OFF : Max. 3.5ms @ 24Vac OFF to ON : Max. 1ms @ 24Vdc ON to OFF : Max. 3ms @ 24Vdc
Output Current Rating (At Rated Power)	Max. 2A / Channel Operating Temperature -40°C~70°C : Max. 7A / Unit -40°C~50°C : Max. 8A / Unit
Frequency Range (Vac)	47 ~ 63Hz
Common Type	4 points / 2 Common
General Specification	
Power Dissipation	80mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Field Power passes through to the next module Supply Voltage : 24Vdc nominal Voltage Range : 15~32Vdc (AC Power not used)
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.13.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Reserved				D3	D2	D1	D0



- Output Module data

Reserved	D3	D2	D1	D0
----------	----	----	----	----


3.13.7. Parameter Data

- Valid Parameter Length : 2 Bytes
- Parameter Data

Offset	Decimal Bit	Description	Default Value
Byte0	00-03	Fault Action(0~3) 0: Fault value, 1: Hold last state	0(Fault value)
Byte1	00-03	Fault value(0~3) 0: Off, 1: On	0(Off)

3.14. GT-2784

3.14.1. Wiring Diagram

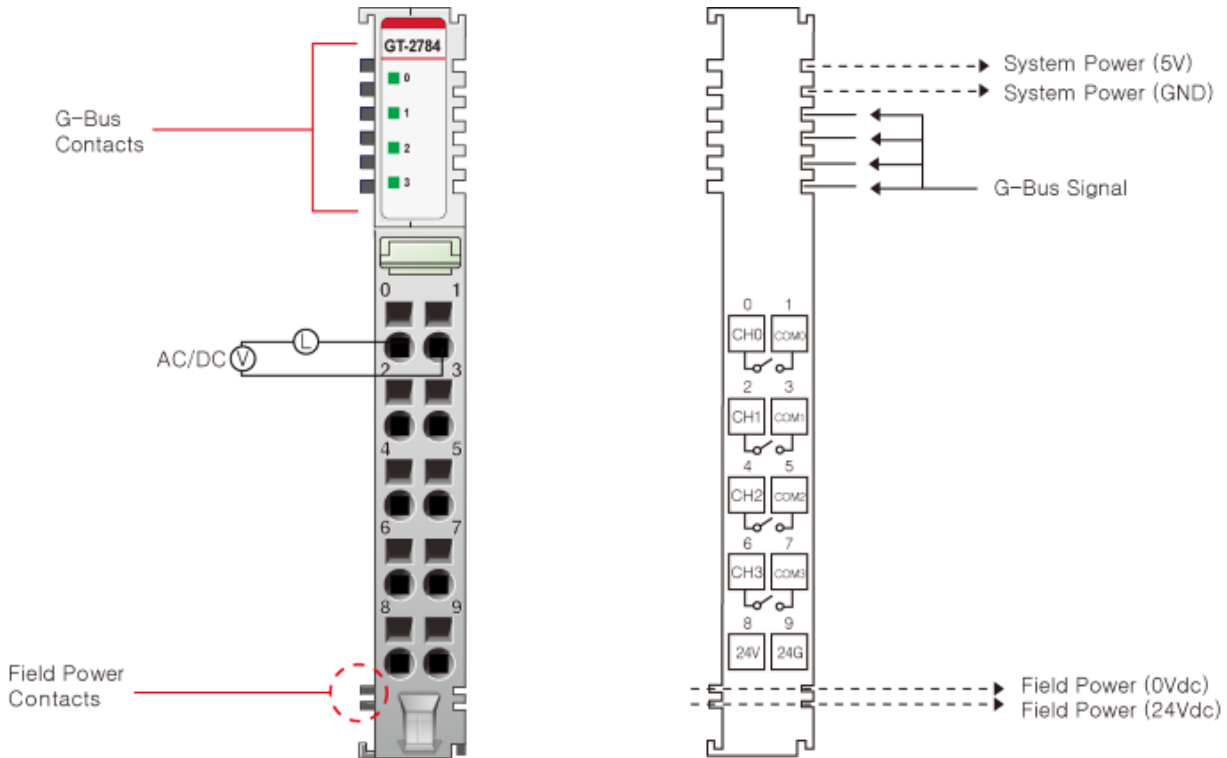

Pin No.	Signal Description	Signal Description	Pin No.
0	Output Channel 0	COM 0	1
2	Output Channel 1	COM 1	3
4	Output Channel 2	COM 2	5
6	Output Channel 3	COM 3	7
8	Common (Field Power 24V)	Common (Field Power 0V)	9

3.14.2. LED Indicator



LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green

3.14.3. Channel Status LED

Status	LED	To indicate
Off	Off	No output Signal
On	Green	Output signal transmitted

3.14.4. Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 60°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% Non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27
Vibration Resistance	Based on IEC 60068-2-6 Sine Vibration - 5 ~ 25Hz : ±1.6mm - 25 ~ 300Hz : 4g - Sweep Rate : 1 Oct/min, 20 Sweeps Random Vibration - 10 ~ 40 Hz : 0.0125 g ² /Hz - 40 ~ 100 Hz : 0.0125 → 0.002 g ² /Hz - 100 ~ 500 Hz : 0.002 g ² /Hz - 500 ~ 2000 Hz : 0.002 → 1.3 x 10 ⁻⁴ g ² /Hz - Test time : 1hrs for each test
EMC Resistance Burst/ESD	EN 61000-6-2 : 2005 EN61000-6-4/All : 2011
Protection Class	Variable/IP20
Installation Position	Vertical and horizontal installation is available
Product Certifications	CE, UL


3.14.5. Specification

Items	Specification
Output Specification	
Output Per Module	4 Points Bi-directional
Indicators	4 Green Output Status LEDs
Relay Type	MOS Relay (Solid State Relay)
Output Voltage Range (Load Dependent)	Max. 110Vac @ 1A resistive Max. 110Vdc @ 1A resistive
Output Delay Time (Resistive Load)	OFF to ON : Max. 1.5ms @ 110Vac ON to OFF : Max. 3ms @ 110Vac OFF to ON : Max. 1ms @ 110Vdc ON to OFF : Max. 3ms @ 110Vdc
Output Current Rating (At Rated Power)	Max. 1A / Channel 60°C : 0.8A / Channel 50°C : 1A / Channel
Frequency Range (Vac)	47 ~ 63Hz
Common Type	4 points / 2 Common
General Specification	
Power Dissipation	80mA @ 5Vdc
Isolation	I/O to Logic : Photocoupler Isolation Field Power : Non-Isolation
Field Power	Field Power passes through to the next module Supply Voltage : 24Vdc nominal Voltage Range : 15~32Vdc (AC Power not used)
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to '1. Environment Specification'

3.14.6. Mapping Data into the Image Table

- Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte0	Reserved				D3	D2	D1	D0



- Output Module data

Reserved	D3	D2	D1	D0
----------	----	----	----	----

3.14.7. Parameter Data




- Valid Parameter Length : 2 Bytes
- Parameter Data

Offset	Decimal Bit	Description	Default Value
Byte0	00-03	Fault Action(0~3) 0: Fault value, 1: Hold last state	0(Fault value)
Byte1	00-03	Fault value(0~3) 0: Off, 1: On	0(Off)

4.Dimension



4.1. GT-2xx4(RTB), GT-2xx8(RTB)

(mm)

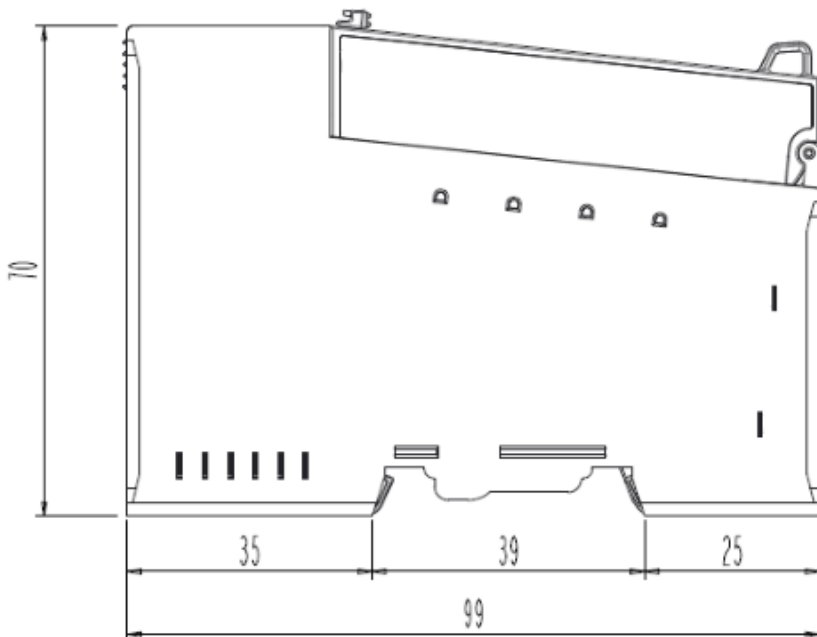


4.2. GT-2xxF(20P Connector)

(mm)

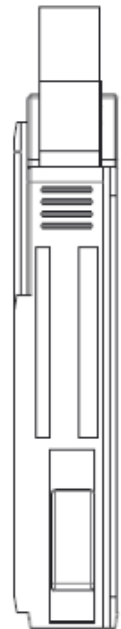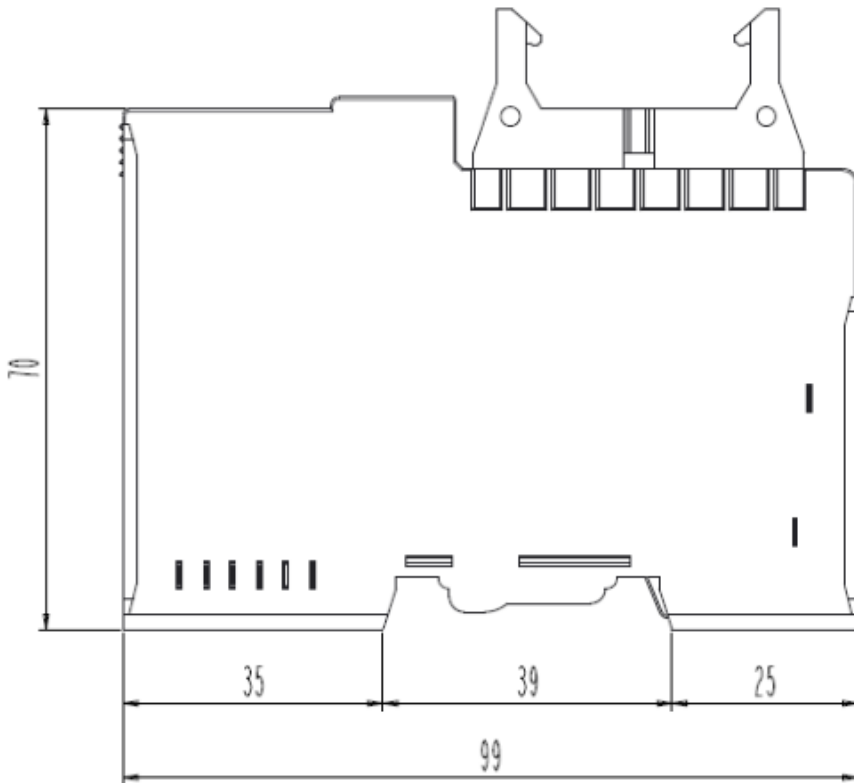




4.3. GT-2xxA (40P Connector)

(mm)

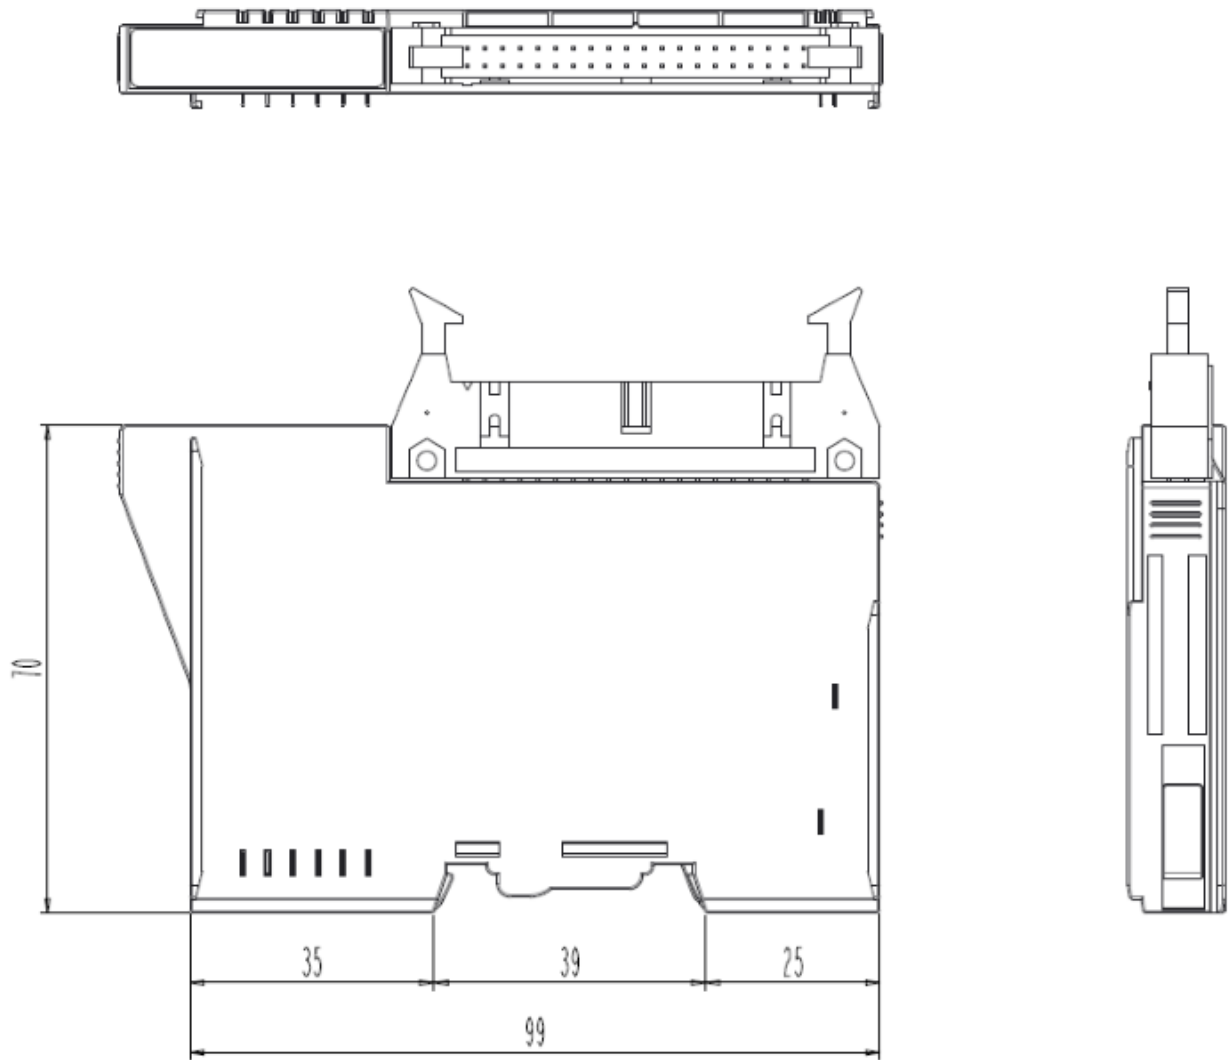

4.4. GT-225F/226F(18RTB)

(mm)

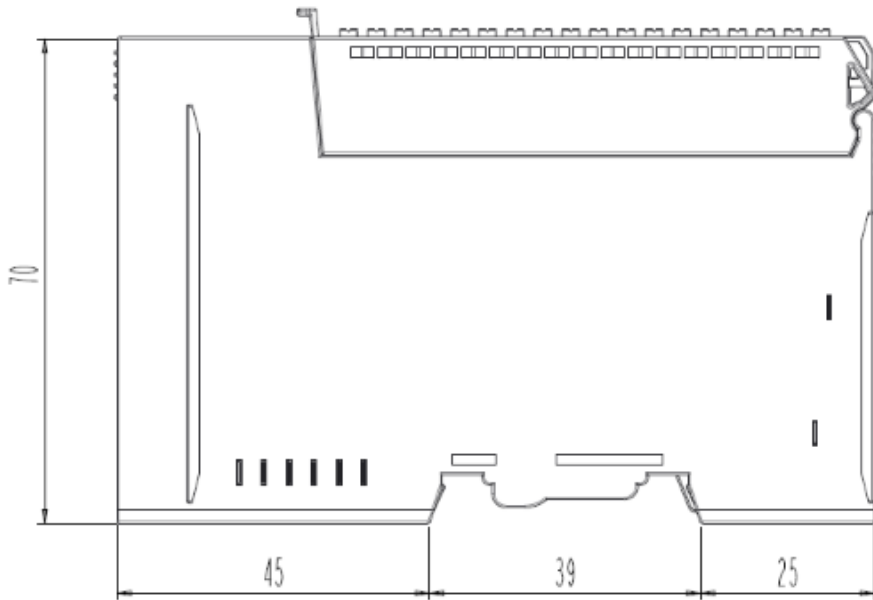

5. Mounting

Caution!

- **Hot surface!**


The surface of the housing can become hot during operation. If the device was operated at high ambient temperatures, allow it to be cool before touching it.

Notice!

- **Perform work on devices only if they are de-energized!**





Working on energized devices can damage them. Therefore, turn off the power supply before working on the devices.

5.1. I/O Inserting and Removing Devices

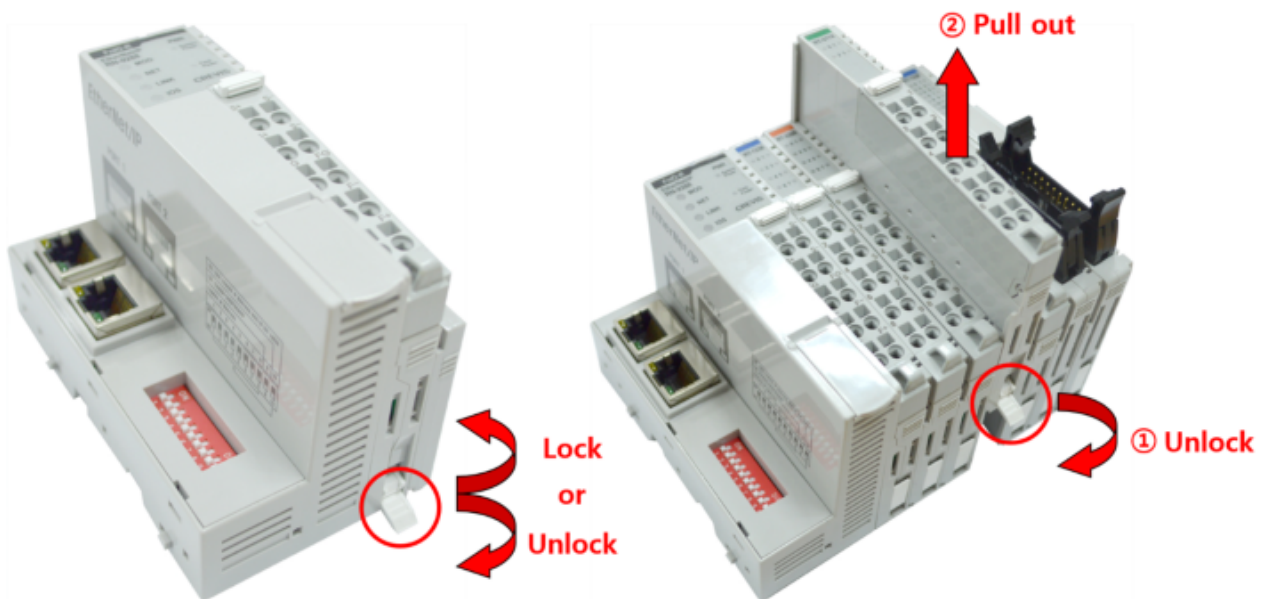

- As above figure in order to safeguard the G-Series module from jamming, it should be fixed onto the DIN rail with locking level. To do so, fold on the upper of the locking lever.
To pull out the G-Series module, unfold the locking lever as below figure.


5.2. RTB (Removable Terminal Block)

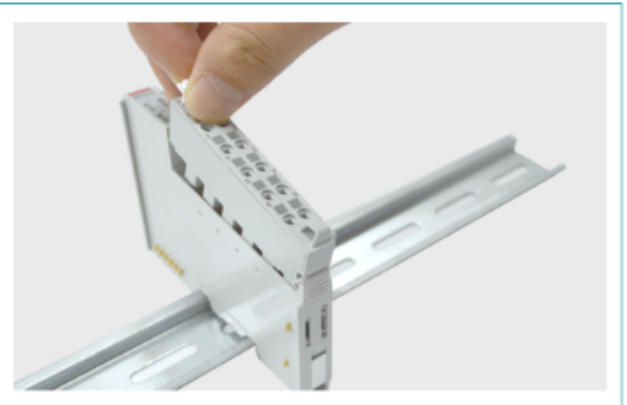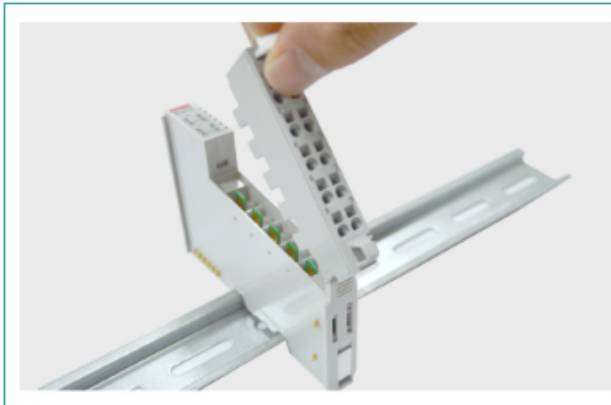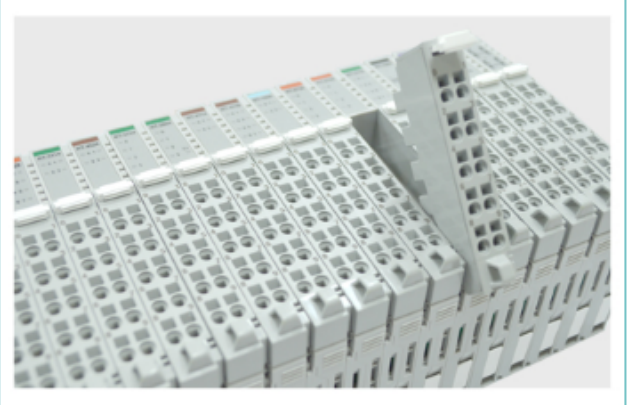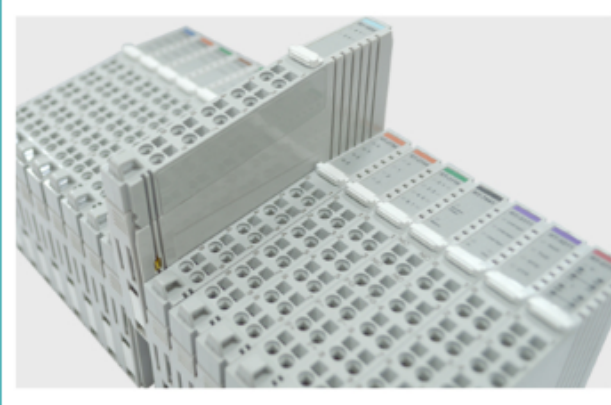

- Whole terminal block can be combined and removed for the convenience.
- There is a locking switch on the RTB for the easy combination and easy removal.
- Easy combination and easy removal for IO modules on the din rail through One Touch Locking Switch.

6. GBus Pin Description

Communication between the GN series and the expansion module as well as system / field power supply of the bus modules is carried out via the internal bus. It is comprised of 6 data pin and 2 field power pin.

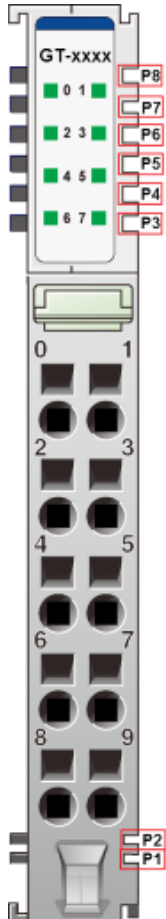

*Please refer to the table below regarding the pin description from P1 to P8.

No.	Description
P1	Field Power (VCC)
P2	Field Power (GND)
P3	GBUS CLK
P4	GBUS MISO
P5	GBUS MOSI
P6	GBUS Token
P7	System Power (GND)
P8	System Power (VCC)

DANGER



Do not touch data and field power pins in order to avoid soiling and damage by ESD noise.

APPENDIX A

A.1 Product List

No.	GT-Number	Description	ID(hex)
Digital Input Module			
1	GT-1238	8 Points, Universal, 24Vdc, 10RTB	1238
2	GT-123F	16 Points, Universal, 24Vdc, 20P connector	123F
3	GT-12DF	16 Points, Universal, 24Vdc, 18RTB	12DF
4	GT-12FA	32 Points, Universal, 24Vdc, 40P connector	12FA
5	GT-1804	4 Points, 120Vac, 10RTB	1804
6	GT-1904	4 Points, 240Vac, 10RTB	1904
Digital Output Module			
7	GT-2318	8 Points, Sink, 24Vdc/0.5A, 10RTB	2318
8	GT-2328	8 Points, Source, 24Vdc/0.5A, 10RTB	2328
9	GT-221F	16 Points, Sink, 24Vdc/0.3A, 20P connector	221F
10	GT-222F	16 Points, Source, 24Vdc/0.3A, 20P connector	222F
11	GT-225F	16 Points, Sink, 24Vdc/0.3A, 18RTB	225F
12	GT-226F	16 Points, Source, 24Vdc/0.3A, 18RTB	226F
13	GT-22BA	32 Points, Sink, 24Vdc/0.3A, 40P connector	22BA
14	GT-22CA	32 Points, Source, 24Vdc/0.3A, 40P connector	22CA
15	GT-2618	8 Points, Sink, 24Vdc/2A, 10RTB	2618
16	GT-2628	8 Points, Source, 24Vdc/2A, 10RTB	2628
17	GT-2734	4 Points, MOS Relay, 240Vdc/ac, 0.5A, 10RTB	2734
18	GT-2744	4 Points, Relay, 24Vdc/2A, 240Vac/2A, 10RTB	2744
19	GT-2764	4 Points, MOS Relay, 24Vdc/ac, 2A, 10RTB	2764
20	GT-2784	4 Points, MOS Relay, 110Vdc/ac, 1A, 10RTB	2784
Analog Input Module			
21	GT-3001	LoadCell (TBD)	3001
22	GT-3114	4 Channels, 0~20, 4~20mA, 12bits, 10RTB	3114
23	GT-3154	4 Channels, 0~20, 4~20mA, 16bits, 10RTB	3154
24	GT-3118	8 Channels, 0~20, 4~20mA, 12bits, 10RTB	3118
25	GT-3158	8 Channels, 0~20, 4~20mA, 16bits, 10RTB	3158
26	GT-311F	16 Channels, 0~20, 4~20mA, 12bits, 20P connector	311F
27	GT-315F	16 Channels, 0~20, 4~20mA, 16bits, 20P connector	315F
28	GT-317F	16 Channels, 0~20, 4~20mA, 12bits, 18RTB	317F
29	GT-319F	16 Channels, 0~20, 4~20mA, 16bits, 18RTB	319F
30	GT-3424	4 Channels, 0~10, 0~5, 1~5Vdc, 12bits, 10RTB	3424
31	GT-3464	4 Channels, 0~10, 0~5, 1~5Vdc, 16bits, 10RTB	3464
32	GT-3428	8 Channels, 0~10, 0~5, 1~5Vdc, 12bits, 10RTB	3428
33	GT-3468	8 Channels, 0~10, 0~5, 1~5Vdc, 16bits, 10RTB	3468
34	GT-342F	16 Channels, 0~10, 0~5, 1~5Vdc, 12bits, 20P connector	342F
35	GT-346F	16 Channels, 0~10, 0~5, 1~5Vdc, 16bits, 20P connector	346F

36	GT-347F	16 Channels, 0~10, 0~5, 1~5Vdc, 12bits, 18RTB	347F
37	GT-349F	16 Channels, 0~10, 0~5, 1~5Vdc, 16bits, 18RTB	349F
38	GT-3704	4 Channels, RTD, 10RTB	3704
39	GT-3708	8 Channels, RTD, 20P connector	3708
40	GT-3804	4 Channels, Thermocouple, 10RTB	3804
41	GT-3808	8 Channels, Thermocouple, 20P connector	3808
42	GT-3901	AC Measurement	3901
43	GT-3914	4 Channels, Differential, 0~20, 4~20, +/-20mA, 12Bits, 10RTB	3914
44	GT-3934	4 Channels, Differential, 0~20, 4~20, +/-20mA, 16Bits, 10RTB	3934
45	GT-3918	8 Channels, Differential, 0~20, 4~20, +/-20mA, 12Bits, 18RTB	3918
46	GT-3938	8 Channels, Differential, 0~20, 4~20, +/-20mA, 16Bits, 18RTB	3938
47	GT-3924	4 Channels, Differential, 0~5, 0~10, +/-5, +/-10Vdc, 12Bits, 10RTB	3924
48	GT-3944	4 Channels, Differential, 0~5, 0~10, +/-5, +/-10Vdc, 16Bits, 10RTB	3944
49	GT-3928	8 Channels, Differential, 0~5, 0~10, +/-5, +/-10Vdc, 12Bits, 18RTB	3928
50	GT-3948	8 Channels, Differential, 0~5, 0~10, +/-5, +/-10Vdc, 16Bits, 18RTB	3948
Analog Output Module			
51	GT-4114	4CH, 0~20mA, 12Bits, 10RTB	4114
52	GT-4154	4CH, 0~20mA, 16Bits, 10RTB	4154
53	GT-4118	8CH, 0~20mA, 12Bits, 10RTB	4118
54	GT-4158	8CH, 0~20mA, 16Bits, 10RTB	4158
55	GT-4424	4CH, 0~10Vdc, 12Bits, 10RTB	4424
56	GT-4464	4CH, 0~10Vdc, 16Bits, 10RTB	4464
57	GT-4428	8CH, 0~10Vdc, 12Bits, 10RTB	4428
58	GT-4468	8CH, 0~10Vdc, 16Bits, 10RTB	4468
59	GT-417F	16CH, 0~20mA, 12Bits, 18RTB	417F
60	GT-419F	16CH, 0~20mA, 16Bits, 18RTB	419F
61	GT-442F	16CH, 0~10Vdc, 12Bits, 20P Connector	442F
62	GT-446F	6CH, 0~10Vdc, 16Bits, 20P Connector	446F
63	GT-447F	16CH, 0~10Vdc, 12Bits, 18RTB	447F
64	GT-449F	16CH, 0~10Vdc, 16Bits, 18RTB	449F
Special Module			
65	GT-5102	2CH, Encoder, Input, 5Vdc, 10RTB	5102
66	GT-5211	1CH, RS 232, RTS/CTS, Full Duplex Type, 10RTB	5211
67	GT-5212	2CH, RS 232, Full Duplex Type, 10RTB	5212
68	GT-5221	1CH, RS 485, Full Duplex Type, 10RTB	5221
69	GT-5231	1CH, RS 485, Half Full Duplex Type, 10RTB	5231
70	GT-5232	2CH, RS 485, Half Full Duplex Type, 10RTB	5232
71	GT-5352	2CH, Synchronous Serial Interface Input, 10RTB	5352
72	GT-5521	1CH, Stepper Module (TBD)	5521
Power Module			
73	GT-7408	Shield Module	7408
74	GT-7508	Common for 0Vdc	7508
75	GT-7511	Power Expansion, In 24Vdc, Out 1A/5Vdc	7511
76	GT-7518	Common for 24Vdc	7518
77	GT-7588	Common for 0Vdc, 24Vdc	7588
78	GT-7641	Field Power, 5/24/48 Vdc, 110/220 Vac	7641

A.2. Glossary

- System Power : The power for starting up CPU.
- Field Power : The power for input and output line.
- Terminator Resistor : Resistor for prevention reflected wave.
- EDS : Electronic Data Sheet.
- Sink : The method of in/output power supply if a device has no power source.
- Source : The method of in/output power supply if a device has the power source.