



Elektrische Werte

Bemessungsstrom	max. 14 A*
Durchgangswiderstand	< 5 mOhm

Werkstoff

Kontakt	Messing, vergoldet
---------	--------------------

Anschluss

Anschlussart	crimp
Anschlussbereich	0,25 - 0,75 mm ²
Abisolierlänge	4 mm
Crimpeinstellungen	sind individuell zu wählen


Mechanische Werte

Steckzyklen	500
-------------	-----

Werkzeuge (nicht im Lieferumfang enthalten)

analoge Crimpzange	TE Teile Nr.: C0-0201-000-000 IC Ref. Nr.: C0.201.00
--------------------	---

(Positioniereinsatz für 1 mm Kontakte	TE Teile Nr.: C0-0403-000-000 IC Ref. Nr.: C0.403.00)
---------------------------------------	--

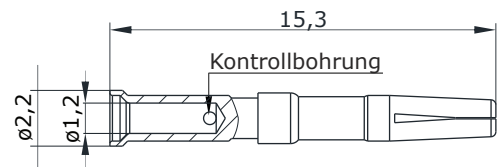

Hauptabmessungen
Kontaktbuchse





Contact Socket 1 mm

for: - 917, D-Sub

TE part number: 60-0469-011-000

IC reference number: 60.469.11

Electrical Data

rated current max. 14 A*
contact resistance < 5 mOhm

Material

contact brass, gold plated

Termination

kind of termination crimp
cross-section 0.25 - 0.75 mm²
stripping length 4 mm
crimp settings select individually


Mechanical Data

mating cycles 500

Tools (not part of product contents)

analog crimping tool TE part no.: C0-0201-000-000
IC ref. no.: C0.201.00

(positioner for 1 mm contacts TE part no.: C0-0403-000-000
IC ref. no.: C0.403.00

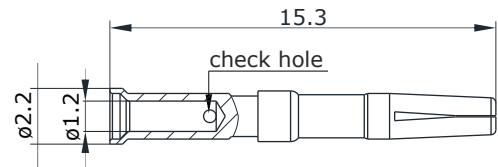

Main Dimensions
contact socket

Y6-H056-000-0EN issued: 30.05.2018/CS

© 2017 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz



* for max. wire cross-section