

### Elektrische Werte

\*Dauer Nennstrom bis 30 A  
Durchgangswiderstand < 3 mOhm

### Werkstoff

Kontakt Messing, vergoldet

### Anschluß


Anschlußart crimp  
Anschlußbereich 2,5 - 4mm<sup>2</sup>  
Abisolierlänge 7 mm  
Crimpeinstellungen sind individuell zu wählen

### Mechanische Werte

Steckzyklen 500

### Werkzeuge (nicht im Lieferumfang enthalten)

Crimpzange  
für 1mm und 2mm Kontakte Best.-Nr. C0.20100  
Positioniereinsatz für 2mm Kontakte Best.-Nr. C0.004.00  
Ausbauwerkzeug für 2mm Kontakte Best.-Nr. C4.003.00

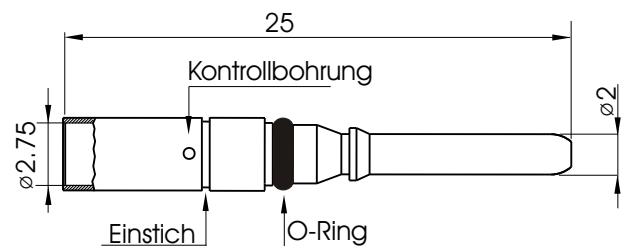

### Hauptabmessungen

Kontaktstift



**Compatibility**  
for all 923 receptacles size I  
for sealed version

**order code.: 61.055.11**

**Electrical data**

\*Nominal current up to 30 A  
contact resistance < 3 mOhm

**Material**

contact brass, nickel plated

**Termination**


kind of termination crimp  
cross section 2,5 - 4mm<sup>2</sup>  
stripping length 7 mm  
crimp settings select individually

**Mechanical Data**

mating cycles 500

**Tools** (not included in delivery)

crimping tool  
for 1mm and 2mm contacts order no.: C0.201.00  
positioner for 2mm contacts order no.: C0.009.00  
dismounting tool für 1mm contacts order no.: C4.003.00

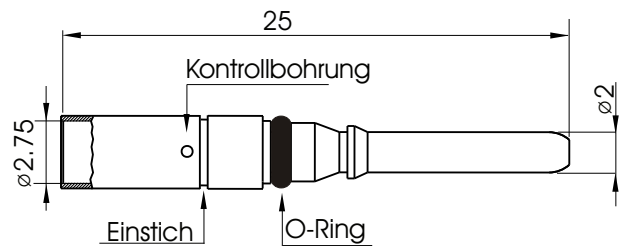

**Main dimension**

contact pin

Copyright by INTERCONTEC Produkt GmbH, Germany.  
All rights reserved in case of a patent or GM registration. Violation will result in a claim for damages.  
All data is just for information. Before utilization of the stated information And data the user has to reassure the validity and topicality.  
Specifications are subject to change without notice.

INTERCONTEC Produkt GmbH  
Bernriederstraße 15, 94559 Niederwinkling  
Tel.: 0049 9962/ 2002-0, Fax: 0049 9962/ 2002-70  
E-Mail: info@intercontec.biz  
Web: www.intercontec.biz

\* for max. wire cross-section